

# PVC FITTINGS



- 541 Fitt B-Active and Fitt Idroflex
- 542 Pressure fluid handling PVC PN-16 fittings
- 544 Pressure PVC valves
- 545 Pressure fluid handling PVC accessories

- 547 Filter ring manifolds for ¾" laterals
- 548 Filter ring manifolds for 1" laterals
- 549 Diffuser filter
- 549 Collectors for valve manifolds

fitt b-active:  
resistente,  
flexible,  
seguro

**FITT B-Active Flex:** la nueva tecnología **EVO TECH** hace que la manguera flexible sea 6 veces más resistente que las otras mangueras al fenómeno de las grietas, según la norma EN ISO 3994, y la protege manteniendo inalteradas las características de elevada flexibilidad y estrecho radio de curvado.

**FITT B-Active Rigid:** la tecnología **SHOCK WAVE** hace que el tubo rígido sea 40 veces más resistente a los golpes respecto al mínimo prescrito por la norma EN ISO 1452, ideal para la instalación incluso con las temperaturas más bajas.

Las mangueras y los tubos **FITT B-Active Flex & Rigid** se pueden integrar perfectamente en cualquier proyecto asegurando la máxima seguridad, resistencia y duración.

bactive.fitt.com  
FITT.com




\*FITT ofrece una garantía de 10 años y una cobertura de seguro decenal específica.



#### FITT B-Active Flex



#### FITT B-Active Rigid

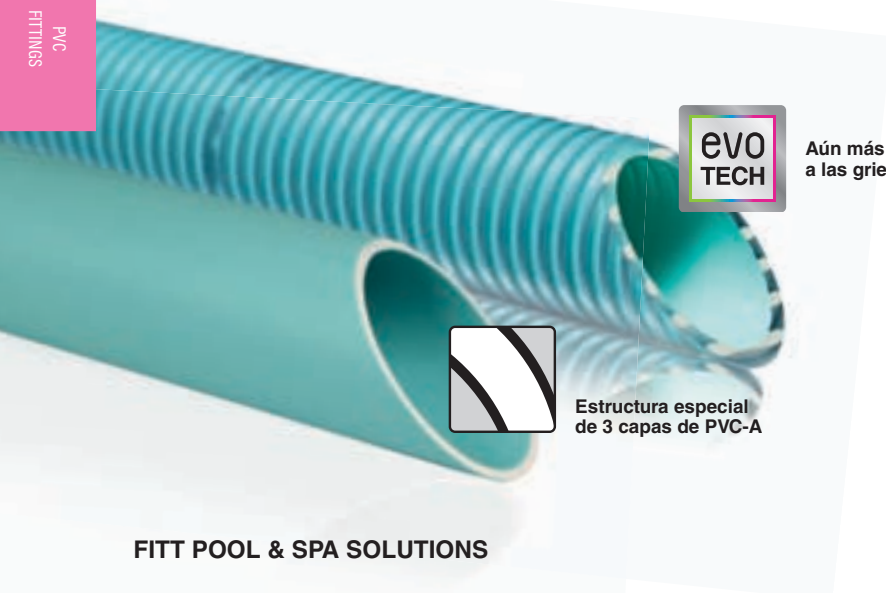

**evo  
TECH**

Aún más resistente  
a las grietas



Estructura especial  
de 3 capas de PVC-A

fitt®

# Fitt B-active RIGID



Conforms to the EN ISO 3994:2014 standard  
TUV approval no. B 17 04 55285 007

## DESCRIPTION

- Mechanical and chemical performance tests were run both internally and with the collaboration of Padua University/DTG Laboratory. Test certified by TÜV (test record no. MEC16173.00).
- Complies with European Directive (EU) 10/2011 for A-B-C simulants
- Operating temperature -10°C/+60°C.
- Formula with phthalate content  $\leq 0.1\%$ .

**Tolerances comply with standard UNI EN ISO 1307: 2008. Thermoplastic products subject to deformation due to outdoor ambient temperature and retraction; longitude tolerance is  $\pm 5\%$ .**

## TECHNICAL FEATURES

| Product           | External Ø (mm) | Pressure (bar) | Pressure distribution (bar) | Drainage (m H <sub>2</sub> O) | Bend radius (mm) | Ring stiffness (kN/m <sup>2</sup> ) |
|-------------------|-----------------|----------------|-----------------------------|-------------------------------|------------------|-------------------------------------|
| FITT B-ACTIVE Ø50 | 50              | 6              | 18                          | 9                             | 125              | 34                                  |
| FITT B-ACTIVE Ø63 | 63              | 4              | 12                          | 9                             | 165              | 22                                  |

## LOGISTICAL FEATURES

| Code  | Product                           | External Ø (mm) | Roll length (m) | Weight (kg/roll) | Quantity (roll/pal) | Pallet dimensions (mm) |
|-------|-----------------------------------|-----------------|-----------------|------------------|---------------------|------------------------|
| 69860 | FITT B-ACTIVE RIGID Ø50 25m       | 50              | 25              | 19               | 12                  | 800x1600xH1240         |
| 69861 | FITT B-ACTIVE RIGID Ø50 50m       | 50              | 50              | 37,5             | 8                   | 800x1600xH1360         |
| 69862 | FITT B-ACTIVE RIGID Ø63 25m       | 63              | 25              | 24,5             | 6                   | 1200x1000xH1280        |
| 73443 | FITT B-ACTIVE RIGID Ø63 L4 PN16   | -               | -               | -                | -                   | -                      |
| 73444 | FITT B-ACTIVE RIGID Ø63 L2 PN16   | -               | -               | -                | -                   | -                      |
| 73445 | FITT B-ACTIVE RIGID Ø50 L2 PN10   | -               | -               | -                | -                   | -                      |
| 73446 | FITT B-ACTIVE RIGID Ø50 L4 PN10   | -               | -               | -                | -                   | -                      |
| 73447 | FITT B-ACTIVE RIGID Ø50 L1,2 PN16 | -               | -               | -                | -                   | -                      |
| 73448 | FITT B-ACTIVE RIGID Ø50 L2 PN16   | -               | -               | -                | -                   | -                      |
| 73449 | FITT B-ACTIVE RIGID Ø50 L4 PN16   | -               | -               | -                | -                   | -                      |
| 73450 | FITT B-ACTIVE RIGID Ø63 L2 PN10   | -               | -               | -                | -                   | -                      |
| 73451 | FITT B-ACTIVE RIGID Ø63 L4 PN10   | -               | -               | -                | -                   | -                      |
| 73452 | FITT B-ACTIVE RIGID Ø63 L1,2 PN16 | -               | -               | -                | -                   | -                      |



Conforms to the EN ISO 3994:2014 standard  
TUV approval no. B 17 04 55285 007

# Fitt Idroflex

## LOGISTICAL FEATURES

| Code  | Product               | External Ø (mm) | Operating pressure (bar) | Drainage (m H <sub>2</sub> O) | Roll length (m) | Weight (kg/roll) | Quantity (roll/pal) | Pallet dimensions (mm) |
|-------|-----------------------|-----------------|--------------------------|-------------------------------|-----------------|------------------|---------------------|------------------------|
| 69852 | FITT IDROFLEX Ø25 50m | 25              | 7                        | 7                             | 50              | 12,5             | 12                  | 800x1200xH1200         |
| 69853 | FITT IDROFLEX Ø32 50m | 32              | 7                        | 7                             | 50              | 21,0             | 16                  | 1200x1200xH1200        |
| 69855 | FITT IDROFLEX Ø40 25m | 40              | 5                        | 7                             | 25              | 15,5             | 16                  | 1200x1200xH1200        |
| 69854 | FITT IDROFLEX Ø40 50m | 40              | 5                        | 7                             | 50              | 30,5             | 5                   | 800x1200xH1200         |
| 69857 | FITT IDROFLEX Ø50 25m | 50              | 5                        | 7                             | 25              | 16               | 12                  | 800x1600xH1240         |
| 69856 | FITT IDROFLEX Ø50 50m | 50              | 5                        | 7                             | 25              | 31,5             | 8                   | 800x1600xH1360         |
| 69858 | FITT IDROFLEX Ø63 25m | 63              | 4                        | 7                             | 25              | 23               | 6                   | 1200x1000xH1280        |
| 69859 | FITT IDROFLEX Ø75 25m | 75              | 2,5                      | 6                             | 25              | 37               | 3                   | 1200x1200xH1200        |
| 69963 | FITT IDROFLEX Ø75 25m | 32              | 7                        | 7                             | 25              | 7                | 12                  | 1200x800xH1360         |
| 69966 | FITT IDROFLEX Ø75 25m | 20              | 7                        | 7                             | 25              | 4                | 48                  | 1200x800xH1360         |



## PVC 90° elbow

Solvent socket



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 32588 | 70            | 8.67                  | 0.0408                            |
| Ø 63 mm  | 32589 | 36            | 7.86                  | 0.0408                            |
| Ø 75 mm  | 01718 | 21            | 8.6                   | 0.0408                            |
| Ø 90 mm  | 01719 | 12            | 8.7                   | 0.0408                            |
| Ø 110 mm | 01720 | 14            | 17.8                  | 0.082                             |



## PVC 45° elbow

Solvent socket



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 32590 | 40            | 3.72                  | 0.0204                            |
| Ø 63 mm  | 32591 | 20            | 3.56                  | 0.0204                            |
| Ø 75 mm  | 01752 | 25            | 8.2                   | 0.0408                            |
| Ø 90 mm  | 01753 | 15            | 8.3                   | 0.0408                            |
| Ø 110 mm | 01754 | 16            | 13.8                  | 0.082                             |



## PVC-Tee 90°

Solvent socket



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 32592 | 48            | 8.95                  | 0.0408                            |
| Ø 63 mm  | 32593 | 30            | 9.73                  | 0.0408                            |
| Ø 75 mm  | 01786 | 15            | 8.4                   | 0.0408                            |
| Ø 90 mm  | 01787 | 8             | 7.4                   | 0.0408                            |
| Ø 110 mm | 01788 | 10            | 16.4                  | 0.082                             |



## PVC union

Solvent socket



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 32594 | 60            | 4.48                  | 0.0204                            |
| Ø 63 mm  | 32595 | 35            | 3.98                  | 0.0204                            |
| Ø 75 mm  | 01878 | 14            | 3.5                   | 0.02                              |
| Ø 90 mm  | 01879 | 18            | 7.6                   | 0.0408                            |
| Ø 110 mm | 01880 | 12            | 8.5                   | 0.0408                            |



## PVC reducing bush

Solvent socket



|                  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|------------------|-------|---------------|-----------------------|-----------------------------------|
| Ø 63 mm x 50 mm  | 32596 | 48            | 3.08                  | 0.0102                            |
| Ø 75 mm x 63 mm  | 01928 | 28            | 2.2                   | 0.01                              |
| Ø 75 mm x 50 mm  | 18685 | 28            | 3.3                   | 0.01                              |
| Ø 90 mm x 75 mm  | 01929 | 36            | 5.1                   | 0.02                              |
| Ø 90 mm x 63 mm  | 18687 | 36            | 6                     | 0.02                              |
| Ø 90 mm x 50 mm  | 18688 | 36            | 6.4                   | 0.02                              |
| Ø 110 mm x 90 mm | 01930 | 16            | 4.3                   | 0.02                              |
| Ø 110 mm x 75 mm | 18689 | 16            | 5.1                   | 0.02                              |
| Ø 110 mm x 63 mm | 18690 | 16            | 5                     | 0.02                              |



## PVC adaptor nipple

Solvent socket & BSP male thread



|                       | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|-----------------------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm x 40 mm x 1½" | 32597 | 24            | 2.48                  | 0.0102                            |
| Ø 63 mm x 50 mm x 2"  | 32598 | 38            | 5.84                  | 0.0204                            |
| Ø 75 mm x 63 mm x 2½" | 02091 | 24            | 4.7                   | 0.02                              |
| Ø 90 mm x 75 mm x 3"  | 02094 | 12            | 3.6                   | 0.02                              |
| Ø 110 mm x 90 mm x 4" | 02097 | 6             | 3.8                   | 0.02                              |



## PVC adaptor bush

Female solvent socket & BSP male thread



|               | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm x 1½" | 32599 | 48            | 3.27                  | 0.0102                            |
| Ø 63 mm x 2"  | 32600 | 50            | 5.60                  | 0.0204                            |
| Ø 75 mm x 2½" | 02108 | 24            | 6.1                   | 0.02                              |
| Ø 90 mm x 3"  | 02109 | 28            | 11.7                  | 0.0408                            |
| Ø 110 mm x 4" | 02110 | 10            | 6.3                   | 0.0408                            |



## PVC 3 piece union

Solvent socket



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 32601 | 30            | 5.80                  | 0.0204                            |
| Ø 63 mm  | 32602 | 12            | 4.44                  | 0.0204                            |
| Ø 75 mm  | 02333 | 16            | 8.7                   | 0.0408                            |
| Ø 90 mm  | 02334 | 12            | 9.5                   | 0.0408                            |
| Ø 110 mm | 02335 | 5             | 7.6                   | 0.0408                            |



## PVC 3 piece union

Female solvent socket & BSP male thread



|                          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--------------------------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm x 1½"            | 32603 | 30            | 6.70                  | 0.0204                            |
| Ø 63 mm x 2"             | 32604 | 12            | 5.24                  | 0.0204                            |
| Ø 50 x 1½" (with o-ring) | 07716 | 30            | 6.9                   | 0.02                              |
| Ø 63 x 2" (with o-ring)  | 07717 | 12            | 4.9                   | 0.02                              |

# PRESSURE PVC VALVES

## PVC ball valve PN-12 (eQUA PN12)



### DESCRIPTION

HDPE (polythene) ball seat. EPDM O-rings. "Antiblock" system.

|         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm | 41941 | 10            | 7.61                  | 0.0204                            |
| Ø 63 mm | 41942 | 10            | 11.80                 | 0.0408                            |



## PVC ball valve (STD PN16)



### DESCRIPTION

HDPE (polythene) ball seat. EPDM O-rings. "Antiblock" system.

|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm  | 36505 | 10            | 7.40                  | 0.0204                            |
| Ø 63 mm  | 36506 | 10            | 12.70                 | 0.0408                            |
| Ø 75 mm  | 36507 | 4             | 9.2                   | 0.0408                            |
| Ø 90 mm  | 36508 | 2             | 7.2                   | 0.0408                            |
| Ø 110 mm | 36509 | 1             | 8.2                   | 0.0408                            |



## PVC spring check valve



### DESCRIPTION

Spring in stainless steel. EPDM O-rings. Vertical or horizontal installation.

|                 | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|-----------------|-------|---------------|-----------------------|-----------------------------------|
| Ø 50 mm         | 09015 | 12            | 7.80                  | 0.0204                            |
| Ø 63 mm         | 09016 | 10            | 11.70                 | 0.0408                            |
| Ø 75 mm         | 09017 | 4             | 8.5                   | 0.0408                            |
| Ø 90 mm         | 09018 | 2             | 7.1                   | 0.0408                            |
| Ø 110 mm (DN80) | 09019 | 2             | 7.6                   | 0.0408                            |

# PRESSURE PVC VALVES

## 3-way rotary disc valve

### DESCRIPTION

3-way rotary disc valve in PVC-U with rotary flap to shut off one port. Can be used in circuits where the working pressure is not above 6 bar (90 psi); includes a lever that shows the closed port.

Sizes: Ø 50-63 mm and Ø 63-75 mm. Available in manual (lever) or automatic (electric actuator) mode. Designed for use in pools and spas. The manual valve can have 2 open ports and 1 shut off, 3 open ports or a partial adjustable opening, whilst the electric actuator can be turned from 90° to 180° and has a 220 VAC or 24 VAC connection.



Manual valves



Automatic valves

|                                               | Code  | Standard Pack | Standard weight in kg | Standard volume in m³ |
|-----------------------------------------------|-------|---------------|-----------------------|-----------------------|
| <b>3-way rotary disc valve solvent socket</b> |       |               |                       |                       |
| Manual Ø 63-75 mm                             | 41862 | 4             | 4.04                  | 0.041                 |
| Manual Ø 50-63 mm                             | 15765 | 8             | 5.2                   | 0.041                 |
| Automatic Ø 50-63 mm. 220 VAC (180°)          | 41863 | 1             | 1.4                   | 0.041                 |
| Automatic Ø 63-75 mm. 220 VAC (180°)          | 59959 | 1             | 1.85                  | 0.041                 |
| Automatic Ø 50-63 mm. 24 VAC (180°)           | 45866 | 1             | 1.4                   | 0.041                 |
| Automatic Ø 63-75 mm. 24 VAC (180°)           | 59960 | 1             | 1.85                  | 0.041                 |
| Automatic Ø 63-75 mm. 220 VAC (90°)           | 41864 | 1             | 1.85                  | 0.041                 |
| Automatic Ø 63-75 mm. 24 VAC (90°)            | 43730 | 1             | 1.85                  | 0.041                 |

\* Ask Cepex Catalogue for automatic ball valves codes

# PRESSURE FLUID HANDLING PVC ACCESSORIES

## PVC pipe PN-10



|          | Code  | Standard Pack | Standard weight in kg | Standard volume in m³ |
|----------|-------|---------------|-----------------------|-----------------------|
| Ø 40 mm  | 02708 | 5 m           | -                     | -                     |
| Ø 50 mm  | 02709 | 5 m           | 45.0                  | 1.14                  |
| Ø 63 mm  | 02710 | 6 m           | 72.0                  | 1.40                  |
| Ø 75 mm  | 02711 | 6 m           | -                     | -                     |
| Ø 90 mm  | 02712 | 6 m           | -                     | -                     |
| Ø 110 mm | 02713 | 6 m           | -                     | -                     |
| Ø 125 mm | 02714 | 6 m           | -                     | -                     |
| Ø 140 mm | 02715 | 6 m           | -                     | -                     |
| Ø 160 mm | 02716 | 6 m           | -                     | -                     |
| Ø 180 mm | 02717 | 6 m           | -                     | -                     |
| Ø 200 mm | 02718 | 6 m           | -                     | -                     |
| Ø 250 mm | 02719 | 6 m           | -                     | -                     |
| Ø 315 mm | 02720 | 6 m           | -                     | -                     |



## Semi-rigid hose

### DESCRIPTION

Made of PVC to glue to pressure fittings using PVC adhesive grey colour.

|         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------|-------|---------------|-----------------------|-----------------------------------|
| Ø 16 mm | 34587 | 25 m          | 3.2                   | 0.030                             |
| Ø 16 mm | 34586 | 50 m          | 6.2                   | 0.040                             |
| Ø 20 mm | 30754 | 25 m          | 4.0                   | 0.040                             |
| Ø 20 mm | 28570 | 50 m          | 9.1                   | 0.060                             |
| Ø 25 mm | 30755 | 25 m          | 6.0                   | 0.050                             |
| Ø 25 mm | 28571 | 50 m          | 11.0                  | 0.042                             |
| Ø 32 mm | 30756 | 25 m          | 9.6                   | 0.070                             |
| Ø 32 mm | 28572 | 50 m          | 16.7                  | 0.065                             |
| Ø 40 mm | 30757 | 25 m          | 12.3                  | 0.110                             |
| Ø 40 mm | 28573 | 50 m          | 23.0                  | 0.109                             |
| Ø 50 mm | 30758 | 25 m          | 18.4                  | 0.150                             |
| Ø 50 mm | 28574 | 50 m          | 37.0                  | 0.178                             |
| Ø 63 mm | 28575 | 25 m          | 49.5                  | 1.140                             |
| Ø 75 mm | 34588 | 25 m          | 33.3                  | 0.300                             |



## PVC Solvent

|         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------|-------|---------------|-----------------------|-----------------------------------|
| 0.125 l | 54740 | 28            | 4.7                   | 0.026                             |
| 0.5 l   | 02432 | 15            | 8.1                   | 0.026                             |
| 1 l     | 02431 | 12            | 11.0                  | 0.036                             |



## PVC Glue

|                         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|-------------------------|-------|---------------|-----------------------|-----------------------------------|
| 0,25 l                  | 02429 | 30            | 10.0                  | 0.024                             |
| 0,50 l                  | 02427 | 15            | 8.0                   | 0.026                             |
| 1 l                     | 02426 | 12            | 13.0                  | 0.036                             |
| 0.50 l with paint brush | 09043 | -             | -                     | -                                 |
| 1 l with paint brush    | 09044 | -             | -                     | -                                 |



## PVC Cleaner

### DESCRIPTION

Liquid cleaner specially adequate for cleaning and degreasing pipes, coupling sockets and other PVC rigid fittings before gluing them together, and for removing excess glue.

|                 | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|-----------------|-------|---------------|-----------------------|-----------------------------------|
| Cleaner 500 ml  | 57685 | -             | -                     | -                                 |
| Cleaner 1000 ml | 57687 | -             | -                     | -                                 |



## Blue Adhesive

extra quick drying for flexible and rigid PVC pipes



### DESCRIPTION

For large diameter pressure pipes. Slow setting time, allowing correct positioning of the fittings and perfect cementation.

Supplied with brush.

|         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------|-------|---------------|-----------------------|-----------------------------------|
| 250 ml  | 56217 | 36            | 11.18                 | 0.02                              |
| 500 ml  | 56218 | 24            | 13.50                 | 0.02                              |
| 1000 ml | 56221 | 12            | 12.90                 | 0.02                              |



## Blue Adhesive

extra quick drying for flexible and rigid PVC pipes



### DESCRIPTION

Special for pools. For use in pool installations. Its high Gel composition and covering capacity gives perfect cementation. Supplied with brush.

|         | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------|-------|---------------|-----------------------|-----------------------------------|
| 250 ml  | 57680 | 36            | 11.20                 | 0.02                              |
| 500 ml  | 57682 | 24            | 13.50                 | 0.02                              |
| 1000 ml | 57683 | 12            | 12.90                 | 0.02                              |

### FILTER RING MANIFOLDS FOR 3/4" LATERALS

## 8 lateral ring manifold



### DESCRIPTION

Made of PVC, inner Ø 50 mm. For 3/4" collector arms.

|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 00624 | 12            | 4.0                   | 0.017                             |

## 12 lateral ring manifold



### DESCRIPTION

Made of PVC, inner Ø 63 mm. For 3/4" collector arms.

|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 00625 | 6             | 3.0                   | 0.310                             |

## 3/4" laterals



### DESCRIPTION

0.3 mm slots.

|                            | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------------------------|-------|---------------|-----------------------|-----------------------------------|
| Length 225 mm              | 00626 | 50            | 2.0                   | 0.017                             |
| Length 160 mm              | 00627 | 50            | 2.0                   | 0.017                             |
| Length 110 mm              | 00628 | 50            | 2.0                   | 0.008                             |
| Length 100 mm (extensions) | 00629 | 50            | 2.0                   | 0.008                             |



## Bush coupling

### DESCRIPTION

For laterals. In PVC.

|                       | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|-----------------------|-------|---------------|-----------------------|-----------------------------------|
| Inside threading 3/4" | 00630 | 50            | 2.0                   | 0.003                             |



## 8 lateral ring manifold

### DESCRIPTION

Made of PVC, inner Ø 50 mm. For 1" collector arms.

|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 06433 | 12            | 4.0                   | 0.017                             |

## 12 lateral ring manifold

### DESCRIPTION

Made of PVC, inner Ø 63 mm. For 1" collector arms.

|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 06434 | 6             | 3.0                   | 0.310                             |

## 1" laterals



### DESCRIPTION

0.3 mm slots.

|                            | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|----------------------------|-------|---------------|-----------------------|-----------------------------------|
| Length 225 mm              | 06435 | 50            | 2.0                   | 0.017                             |
| Length 160 mm              | 06436 | 50            | 2.0                   | 0.017                             |
| Length 110 mm              | 06437 | 50            | 2.0                   | 0.008                             |
| Length 100 mm (extensions) | 06438 | 50            | 2.0                   | 0.008                             |

## Bush coupling



### DESCRIPTION

For laterals. In PVC.

|                    | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--------------------|-------|---------------|-----------------------|-----------------------------------|
| Inner threading 1" | 06439 | -             | -                     | -                                 |

### DIFFUSER FILTER

## For Ø 50 mm pipe



|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 00645 | 6             | 1.0                   | 0.009                             |

## For Ø 63 mm pipe

|  | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|--|-------|---------------|-----------------------|-----------------------------------|
|  | 00646 | 6             | 2.0                   | 0.023                             |

### COLLECTORS FOR VALVE MANIFOLDS

## Collector pipe for valve manifold



### DESCRIPTION

Made of PVC. Inlet connections, inner Ø 50 mm and 63 mm. Outlet connections Ø 50 and 63 mm.

|                     | Code  | Standard Pack | Standard weight in kg | Standard volume in m <sup>3</sup> |
|---------------------|-------|---------------|-----------------------|-----------------------------------|
| Connections Ø 50 mm | 31877 | 1             | -                     | -                                 |
| Connections Ø 63 mm | 34407 | 1             | -                     | -                                 |