




WE POP THE ICE

SOCIALice

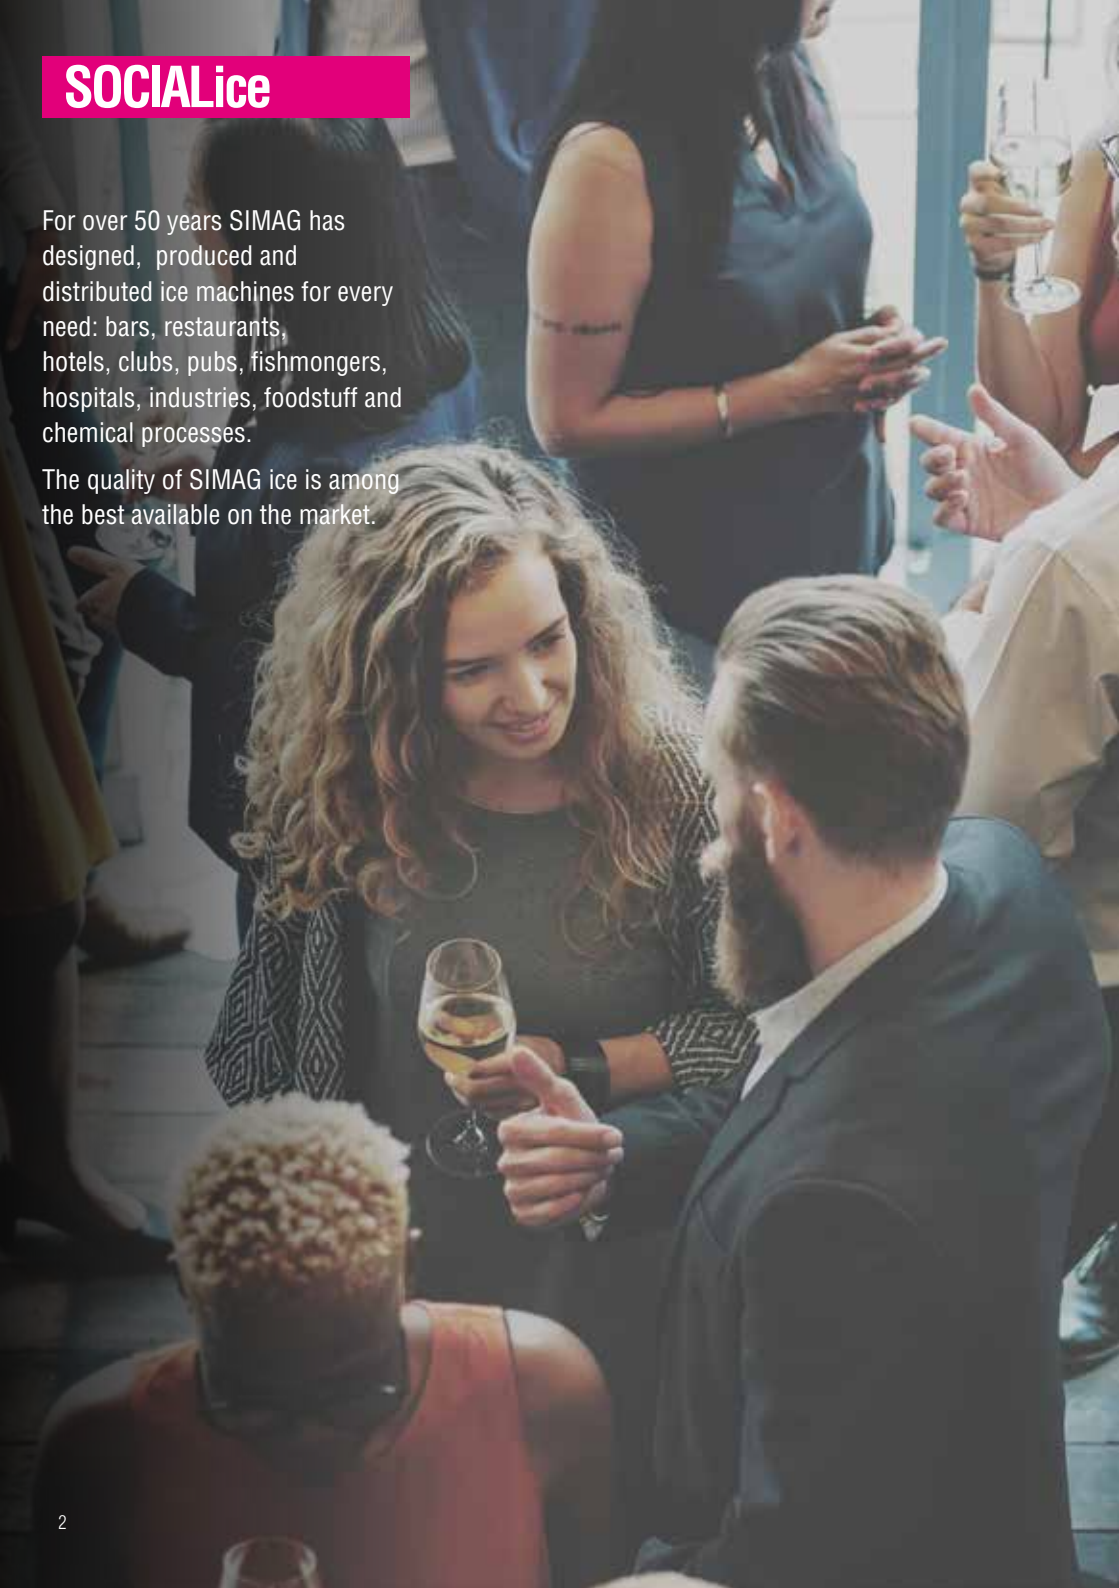

For over 50 years SIMAG has designed, produced and distributed ice machines for every need: bars, restaurants, hotels, clubs, pubs, fishmongers, hospitals, industries, foodstuff and chemical processes.

The quality of SIMAG ice is among the best available on the market.

The R290 refrigerant gas implementation on the SDH & SPH range ice machines, is a proof of attention on environment and energy consumption. It is a natural gas approved by the UE with low environmental impact and excellent thermodynamic performance.



POP ice



EVERYBODY GETS WHAT THEY WANT



FULL CUBES

SCE RANGE

The most POP ice for the best cocktails



HOLLOW CUBES

SDE/SDH RANGE

Refreshing ice, suitable for any drink



DICE CUBES

SVD RANGE

Ideal ice for fast food and coffee chains



NUGGET & MOJO

SNM/SMI RANGE

Compressed ice, excellent with carbonated drinks and smoothies



FLAKE ICE

SPR/SPN and SPH RANGE

Versatile ice, suitable for food&beverage and fish display

FULL Cubes

SCE RANGE

Very clear, super hard
and slow dilution.
Perfect for cocktails.

34 mm



Ø 30 mm



HIGHLIGHTS

- Stainless steel bodywork
- Optional Easy Fit Pump (external)
- Air or water cooled
- Easy scaling cleaning system

SCE 20



Max production 24h:

SCE 20 AS
Air cooled 20 kg

SCE 20 WS
Water cooled 20 kg

Bin capacity 6 kg

Dimensions mm:
W 334 x D 457 x H 597
Legs + 2 mm

SCE 30



Max production 24h:

SCE 30 AS
Air cooled 31 kg

SCE 30 WS
Water cooled 28 kg

Bin capacity 8,5 kg

Dimensions mm:
L 389 x P 514 x H 640
Legs + 2 mm

SCE 40



Max production 24h:

SCE 40 AS
Air cooled 40 kg

SCE 40 WS
Water cooled 38 kg

Bin capacity 15 kg

Dimensions mm:
L 465 x P 568 x H 690
Legs + 2 mm

SCE 50



Max production 24h:

SCE 50 AS
Air cooled 48 kg

SCE 50 WS
Water cooled 50 kg

Bin capacity 22 kg

Dimensions mm:
W 465 x D 568 x H 788
Legs + 92 mm

SCE 65



Max production 24h:

SCE 65 AS
Air cooled 58 kg

SCE 65 WS
Water cooled 63 kg

Bin capacity 22 kg

Dimensions mm:
W 465 x D 568 x H 788
Legs + 92 mm

SCE 105



Max production 24h:

SCE 105 AS
Air cooled 93 kg

SCE 105 WS
Water cooled 96 kg

Bin capacity 50 kg

Dimensions mm:
W 702 x D 604 x H 970
Legs + 92 mm



SDE | SDH RANGE

Refreshing ice, suitable
for any drink



HIGHLIGHTS

- Stainless steel bodywork
- Air or water cooled
- Main switch (except model SDE 18)
- Washable air filter (except models SDE 18, SDE 24)
- Easy scaling cleaning system



HOLLOW Cubes

SDE 18



Max production 24h:

SDE 18 AS

Air cooled 18 kg

SDE 18 WS

Water cooled 15 kg

Bin capacity

4 kg

Dimensions mm:

W 335 x D 457 x H 552

Legs + 2 mm

SDE 24



Max production 24h:

SDE 24 AS

Air cooled 24 kg

SDE 24 WS

Water cooled 21 kg

Bin capacity

6 kg

Dimensions mm:

W 335 x D 457 x H 597

Legs + 2 mm

SDE 30



Max production 24h:

SDE 30 AS

Air cooled 30 kg

SDE 30 WS

Water cooled 28 kg

Bin capacity

6 kg

Dimensions mm:

W 335 x D 457 x H 597

Legs + 2 mm

SDE 34



Max production 24h:

SDE 34 AS

Air cooled 32 kg

SDE 34 WS

Water cooled 28 kg

Bin capacity

12 kg

Dimensions mm:

W 378 x D 555 x H 637

Legs + 2 mm

SDE 40



Max production 24h:

SDE 40 AS

Air cooled 38 kg

SDE 40 WS

Water cooled 36 kg

Bin capacity

12 kg

Dimensions mm:

W 378 x D 555 x H 637

Legs + 92 mm

SDE 50



Max production 24h:

SDE 50 AS

Air cooled 47 kg

SDE 50 WS

Water cooled 45 kg

Bin capacity

17 kg

Dimensions mm:

W 486 x D 575 x H 721

Legs + 92 mm

SDE 64



Max production 24h:

SDE 64 AS

Air cooled 63 kg

SDE 64 WS

Water cooled 60 kg

Bin capacity 20 kg

Dimensions mm:

W 486 x D 575 x H 816

Legs + 92 mm

SDE 84



Max production 24h:

SDE 84 AS

Air cooled 82 kg

SDE 84 WS

Water cooled 90 kg

Bin capacity 30 kg

Dimensions mm:

W 670 x D 595 x H 892

Legs + 92 mm

SDE 100



Max production 24h:

SDE 100 AS

Air cooled 100 kg

SDE 100 WS

Water cooled 95 kg

Bin capacity 30 kg

Dimensions mm:

W 670 x D 595 x H 892

Legs + 92 mm

SDE 170



Max production 24h:

SDE 170 AS

Air cooled 165 kg

SDE 170 WS

Water cooled 171 kg

Bin capacity 50 kg

Dimensions mm:

W 1042 x D 575 x H 892

Legs + 92 mm

SDE 220



Max production 24h:

SDE 220 AS

Air cooled 215 kg

SDE 220 WS

Water cooled 215 kg

Bin capacity 68 kg

Dimensions mm:

W 1042 x D 575 x H 1042

Legs + 92 mm

A photograph of a large indoor waterfall cascading from a glass and steel canopy into a lush garden. The canopy is made of a grid of steel beams and glass panels, allowing natural light to filter through. The waterfall is a wide, rectangular sheet of water falling into a pool below. The surrounding area is filled with various tropical plants, including palm trees and dense foliage. The overall atmosphere is bright and airy, with a focus on natural light and greenery.

HOLLOW Cubes

**SDH RANGE
R290**

HIGHLIGHTS

- Stainless steel bodywork
- Air or water cooled
- Washable air filter (except models SDE 18, SDE 24)
- Easy scaling cleaning system

**SIMAG**

SDH 18



Max production 24h:
SDH 18 AS

Air cooled 19 kg

Bin capacity 4 kg

Dimensions mm:
W 335 x D 457 x H 552
Legs + 2 mm

SDH 24



Max production 24h:
SDH 24 AS

Air cooled 25 kg

Bin capacity 6 kg

Dimensions mm:
W 335 x D 457 x H 597
Legs + 2 mm

SDH 30



Max production 24h:
SDH 30 AS

Air cooled 32 kg

Bin capacity 6 kg

Dimensions mm:
W 335 x D 457 x H 597
Legs + 2 mm

SDH 40



Max production 24h:
SDH 40 AS

Air cooled 41 kg

Bin capacity 12 kg

Dimensions mm:
W 378 x D 555 x H 637
Legs + 92 mm

SDH 50



Max production 24h:
SDH 50 AS

Air cooled 50 kg

Bin capacity 17 kg

Dimensions mm:
W 486 x D 575 x H 721
Legs + 92 mm

SDH 64



Max production 24h:
SDH 64 AS

Air cooled 60 kg


Bin capacity 20 kg

Dimensions mm:
W 486 x D 575 x H 816
Legs + 92 mm



SVD RANGE

Ideal ice for fast food and coffee chains.



DICE



HALF DICE



HIGHLIGHTS

- Electronic controls
- Stainless steel bodywork
- Air or water cooled
- Washable air filter
- Built-in cleaning system
- Easily accessible components

SVD 152



Max production 24h:

SVD 152 AS

Air cooled 160 kg

SVD 152 WS

Water cooled 140 kg

Dimensions mm:

W 558 x D 610 x H 609

SVD 222



Max production 24h:

SVD 222 AS

Air cooled 210 kg

SVD 222 WS

Water cooled 210 kg

Dimensions mm:

W 558 x D 610 x H 609

SVD 203



Max production 24h:

SVD 203 AS

Air cooled 220 kg

SVD 203 WS

Water cooled 220 kg

Dimensions mm:

W 760 x D 620 x H 575

SVD 303



Max production 24h:

SVD 303 AS

Air cooled 290 kg

SVD 303 WS

Water cooled 290 kg

Dimensions mm:

W 760 x D 620 x H 575

SVD 503



Max production 24h:

SVD 503 AS

Air cooled 430 kg

SVD 503 WS

Water cooled 420 kg

Dimensions mm:

W 760 x D 620 x H 800



SMI | SNM RANGE

Compressed ice, excellent
with carbonated drinks
and smoothies.



NUGGET ICE

Residual water content 8%



HIGHLIGHTS

- Electronic control
- Air or water cooled
- Stainless steel auger and freezing cylinder evaporator
- Stainless steel side panels
- High efficiency, no water waste

SMI 80



Max production 24h:

SMI 80 AS

Air cooled 85 kg

SMI 80 WS

Water cooled 85 kg

Bin capacity 25 kg

Dimensions mm:

W 529 x D 626 x H 793

Legs + 92 mm

SNM 300



Max production 24h:

SNM 300 AS

Air cooled 270 kg

SNM 300 WS

Water cooled 270 kg

Dimensions mm:

W 538 x D 663 x H 465

Legs + 5 mm

SNM 500



Max production 24h:

SNM 500 AS

Air cooled 485 kg

SNM 500 WS

Water cooled 485 kg

Dimensions mm:

W 538 x D 663 x H 785

Legs + 5 mm



SPR | SPN e SPH RANGE

Versatile ice, suitable for
food & beverage and fish display



Residual water content 25%:
SPR all - SPN 125 - 255

Residual water content 15%:
SPN 405 - 605 - 1205



HIGHLIGHTS

- Electronic control
- Air or water cooled
- Stainless steel auger and freezing cylinder evaporator
- Easily accessible components
- High efficiency, no water waste

SPR 80



Max production 24h:

SPR 80 AS

Air cooled 70 kg

SPR 80 WS

Water cooled 73 kg

Bin capacity 25 kg

Dimensions mm:

W 529 x D 626 x H 793

Legs + 92 mm

SPR 120



Max production 24h:

SPR 120 AS

Air cooled 120 kg

SPR 120 WS

Water cooled 120 kg

Bin capacity 55 kg

Dimensions mm:

W 920 x D 594 x H 778

Legs + 89 mm

SPR 200



Max production 24h:

SPR 200 AS

Air cooled 220 kg

SPR 200 WS

Water cooled 220 kg

Bin capacity 55 kg

Dimensions mm:

W 920 x D 594 x H 778

Legs + 89 mm

SPN 125



Max production 24h:

SPN 125 AS

Air cooled 120 kg

SPN 125 WS

Water cooled 120 kg

Dimensions mm:

W 564 x D 536 x H 526

Legs + 5 mm

SPN 255



Max production 24h:

SPN 255 AS

Air cooled 200 kg

SPN 255 WS

Water cooled 205 kg

Dimensions mm:

W 564 x D 536 x H 526

Legs + 5 mm

SPN 405



Max production 24h:

SPN 405 AS

Air cooled 320 kg

SPN 405 WS

Water cooled 330 kg

Dimensions mm:

W 538 x D 663 x H 645

Legs + 5 mm

SPN 605



Max production 24h:

SPN 605 AS

Air cooled 600 kg

SPN 605 WS

Water cooled 600 kg

Dimensions mm:

W 536 x D 663 x H 785

Legs + 5 mm

SPN 1205



Max production 24h:

SPN 1205 AS

Air cooled 1150 kg

SPN 605 WS

Water cooled 1200 kg

Dimensions mm:

W 1065 x D 698 x H 850

Legs + 5 mm

FLAKE Ice

**SPH RANGE
R290**

SPH 80



Max production 24h:

SPH 80 AS

Air cooled 70 kg

Bin capacity 25 kg

Dimensions mm:

W 529 x D 626 x H 793

Legs + 92 mm

SPH 255



Max production 24h:

SPH 255 AS

Air cooled 200 kg

Dimensions mm:

W 564 x D 536 x H 526

Legs + 5 mm

SPH 405



Max production 24h:

SPH 405 AS

Air cooled 320 kg

Dimensions mm:

W 538 x D 663 x H 645

Legs + 5 mm

SPH 605



Max production 24h:

SPH 605 AS

Air cooled 410 kg

Dimensions mm:

W 538 x D 663 x H 785

Legs + 5 mm

STORAGE BINS R / RC RANGE



R 100

Storage capacity kg: 129



R 190

Storage capacity kg: 243



R 130

Storage capacity kg: 168



R 250

Storage capacity kg: 252



R 150

Storage capacity kg: 181



R 300

Storage capacity kg: 406



R 400

Storage capacity kg: 478



RC CART

Storage capacity kg: 73



RC 200

Storage capacity kg: 137+73 Cart



RC 300

Storage capacity kg: 318+73 Cart



UNIT / BIN COMBINATION TABLE

MODEL		R 100	R 130	R 150	R 190	R 250	R 300	R 400	RC 200	RC 300
	kg/24h	129	168	181	243	252	406	478	137+73	318+73
SVD 152	160	■	■	CBT30EMCD	+CBT30EMCD					
SVD 222	215	■	■	CBT30EMCD	+CBT30EMCD					■
SVD 203	230			■	■		+CBT48EAMCD			■
SVD 303	315			■	■		+CBT48EAMCD			■
SVD 503	480			■	■		+CBT48EAMCD	+CBT52EAMCD		■
SPN 125	120	■	■	CBT30EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD		■	■
SPN 255	200	■	■	CBT30EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD		■	■
SPN 405	320	CBT22EFCD	+CBT22EFCD	CBT42EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD	+CBT52FMCD	■	■
SPN 605	600	CBT22EFCD	+CBT22EFCD	CBT48FMCD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD	+CBT52FMCD	■	■
SPH 255	200	■	■	CBT30EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD		■	■
SPH 405	300	CBT22EFCD	+CBT22EFCD	CBT42EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD	+CBT52FMCD	■	■
SPH 605	410	CBT22EFCD	+CBT22EFCD	CBT48FMCD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD	+CBT52FMCD	■	■
SNM 300	270	CBT22EFCD	+CBT22EFCD	+CBT30EFSD	+CBT30EFSD	+CBT42EFSD	CBT52FMCD	+CBT52FMCD	■	■
SNM 500	485	CBT22EFCD	+CBT22EFCD	+CBT30EFSD	+CBT30EFSD	+CBT42EFSD	+CBT48FMCD	+CBT52FMCD	■	■

- Direct coupling
 - Ice chute cut-out performed upon installation
- CBTxxxxxxxxx : additional bin top required



XR 30 - XSafe Kit

External optional sanitation unit.
Sanitation system which works based on natural ozone technology sanitizing the unit in an endless cleaning cycle 24/7.
To use as optional wherever a sanitation of the unit is desired, keeping the ice device free of bacteria and virus.



Easy Fit

External optional drain Pump
Stainless steel body
300 max l/h

DESCRIPTION:

"EASY FIT" to use wherever no floor drain for the Ice machine unit is existing.
To install in Loop in – loop out mode between the Ice maker and the drain.
Easy & simple system to drain max. 300l/h of sludge water with an max high efficiency of 2 meters



Simag HQ

Via Pascoli, 22
20010 Pogliano Milanese (MI) Italy

Sales Dept.

Tel + 39 02 93960323
Email: sales@simag.it

Simag Far East

Singapore Office
140 Paya Lebar Road
#08-09 AZ @ Paya Lebar
Singapore 409015
Ph: +65-6738 5393
Email: scotsman@scotsman.com.sg

www.simag.it



[simag.ice](https://www.instagram.com/simag.ice)



[simag.ice](https://www.facebook.com/simag.ice)