

RESIDENTIAL POOL SHELL EQUIPMENT

POOL SHELL
EQUIPMENT



90	POOL SHELL MATERIAL COLOR RANGE	125	ABS NOZZLES
91	ABS SKIMMERS	125	NORM return inlet nozzles
91	UNIK skimmer 25L	126	Multiflow return inlet nozzles
93	NORM skimmer 17.5L	129	Return inlet nozzles
94	17.5 L skimmers	130	Pool floor nozzles
100	Filtering skimmer	132	Nozzles for high flow rates
101	15 L skimmers	133	Suction nozzles
105	Skimmer accessories	136	Adjustable nozzles
108	STAINLESS STEEL SKIMMERS	137	Lateral nozzles
108	SLIM skimmer	137	Hydromassage kits
109	Stainless steel skimmers	138	Accessories for ABS nozzles
112	Stainless steel skimmers accessories	140	STAINLESS STEEL NOZZLES
113	LEVEL REGULATORS	140	STYLE nozzles
113	Level regulators	142	Return inlet nozzles
114	POOL MAIN DRAINS	144	Adjustable nozzles
115	ABS MAIN DRAINS	144	Suction nozzles
115	NORM main drains	146	Stainless Steel nozzles accessories
116	Standard main drains	146	CONNECTION BOXES
119	ABS main drains accessories	147	INTERCHANGEABLE POOL BASIN EQUIPMENT
120	STAINLESS STEEL MAIN DRAINS	148	WALL BUSHINGS
120	STYLE main drains	148	ABS wall bushings
121	Standard stainless steel main drains	149	PVC wall bushings
123	Stainless steel main drains accessories	149	Stainless Steel wall bushings
150	EQUIPMENT PACKS	150	POOL SHELL EQUIPMENT PACKS
150	Pool shell equipment packs	150	ACCESSORIES
150	Winter accessories	151	INSTALLATION DIAGRAMS



ALBA
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner
www.alba.com.mv

SKIMMER UNIK DESIGNED PERFECTLY. INTEGRATED EVENLY.



FULLY INTEGRATED.

Skimmer Unik blends harmoniously into the surroundings of the pool thanks to its fully integrated top cover. Thanks to its lower height of water level from pool floor -5.5 cm- Skimmer Unik offers an infinite pool effect.



QUIET OPERATION.

Skimmer Unik brings improved silent operation thanks to its exclusive curved floater solution.



EASY MAINTENANCE.

Skimmer Unik eases the maintenance thanks to its larger basket capacity (3.5L)* and its easy retrieval without touching the water.

*Versus AstralPool traditional skimmer basket.



NEW CONNECTION BOX

Fully integrated and easier to install and manipulate, see more detail in page 146.



STYLE

A POOL FITTINGS RANGE IN STAINLESS STEEL



MORE SOLUTIONS FOR A PERFECT FINISH

Round and square shapes with a contemporary design
Better integration with pool basin

Thanks to the new design, possible imperfections and installation is covered



EASY INSTALLATION

Solutions available for prefabricated and concrete pools with different lengths to make installer life easier

Compatible with all interchangeable accessories (plastic and stainless steel)
Side smoothing for liner applications and easier to manipulate



EASE OF MAINTENANCE

Easy to clean thanks to the new minimal design
No visible screws in return inlets, avoiding possible corrosion

See pages 120, 140, 141

ASTRALPOOL 

Color range

Summary of the standard pool fits that exist in color version: Beige, Light Grey, Anthracite grey

Family	Descriptions	Concrete pool	Colors	Page	Liner and Prefabricated pool	Colors	Page	
Skimmer	15L	Skimmer 15L STD - opening	00249CLXXX	  	101			
		Skimmer 15L - with wide mouth opening	00251CLXXX	  	102	34413CLXXX	  	103
	17.5L	Skimmer Norm - with inserts				56176CLXXX	  	93
		Skimmer Norm - without inserts	58707CLXXX	  	93	56299CLXXX	  	93
		Skimmer 17.5L - with standard mouth opening, square cover				11309CLXXX	  	97
		Skimmer 17.5L - with standard mouth opening, 6° for polyester pool, round cover				68108CLXXX	  	97
		Skimmer 17.5L - with standard opening				11310CLXXX	  	97
		Skimmer 17.5L with wide mouth opening				11311CLXXX	  	97
		Skimmer 17.5L - with wide mouth opening for parker model				11317CLXXX	  	98
	25L	Skimmer Unik	Several codes	  	92	Several codes	  	92
Main drain		Norm main drain	56378CLXXX	  	115	56380CLXXX	  	115
		Norm main drain - Antivortex grating	56379CLXXX	  	115	56382CLXXX	  	115
		Norm main drain - without inserts				56381CLXXX	  	115
		Norm main drain - ithout inserts				56383CLXXX	  	115
		Antivortex grating						
		Round main drain 2" outlet				00271CLXXX	  	116
Nozzles	Impulsion	Round main drain 2" outlet - without inserts	01467CLXXX	  	116	06474CLXXX	  	116
		Multiflow return inlet	00295CLXXX	  	126	00330CLXXX	  	127
		Multiflow return inlet	00298CLXXX	  	126	00334CLXXX	  	127
		Multiflow return inlet				17383CLXXX	  	127
		Norm return inlet				56499CLXXX	  	125
	Suction Pool Floor	Norm return inlet				56500CLXXX	  	125
		Suction nozzle	00300CLXXX	  	133	17382CLXXX	  	135
		Suction nozzle 2"				00332CLXXX	  	134
	Pool Floor	Pool floor return inlet	00303CLXXX	  	130	00340CLXXX	  	130
		Pool floor return inlet with swivel joint	22353CLXXX	  	131			131
	Lateral nozzle	Lateral nozzle polyester pool				74121CLXXX	  	135
Net & clean	Nozzles			65234CLXXX*				388
Connection boxes	UNIK connection box	75971CLXXX	  	146	75971CLXXX	  	146	
	Connection box	75972CLXXX	  	146	75972CLXXX	  	146	

* Only for concrete and prefabricated pools.



XXXXXCL090 Beige



XXXXCL129 Light Grey



XXXXXCL144 Anthracite Grey

ABS SKIMMERS

UNIK skimmer 25L



Complies with Standards
EN 16582-1
EN 16713-2

Skimmer Unik


ASTRALPOOL 

DESIGNED PERFECTLY. INTEGRATED EVENLY

- + Fully integrated.
- + Quiet operation.
- + Easy maintenance.



SELECTION TABLE

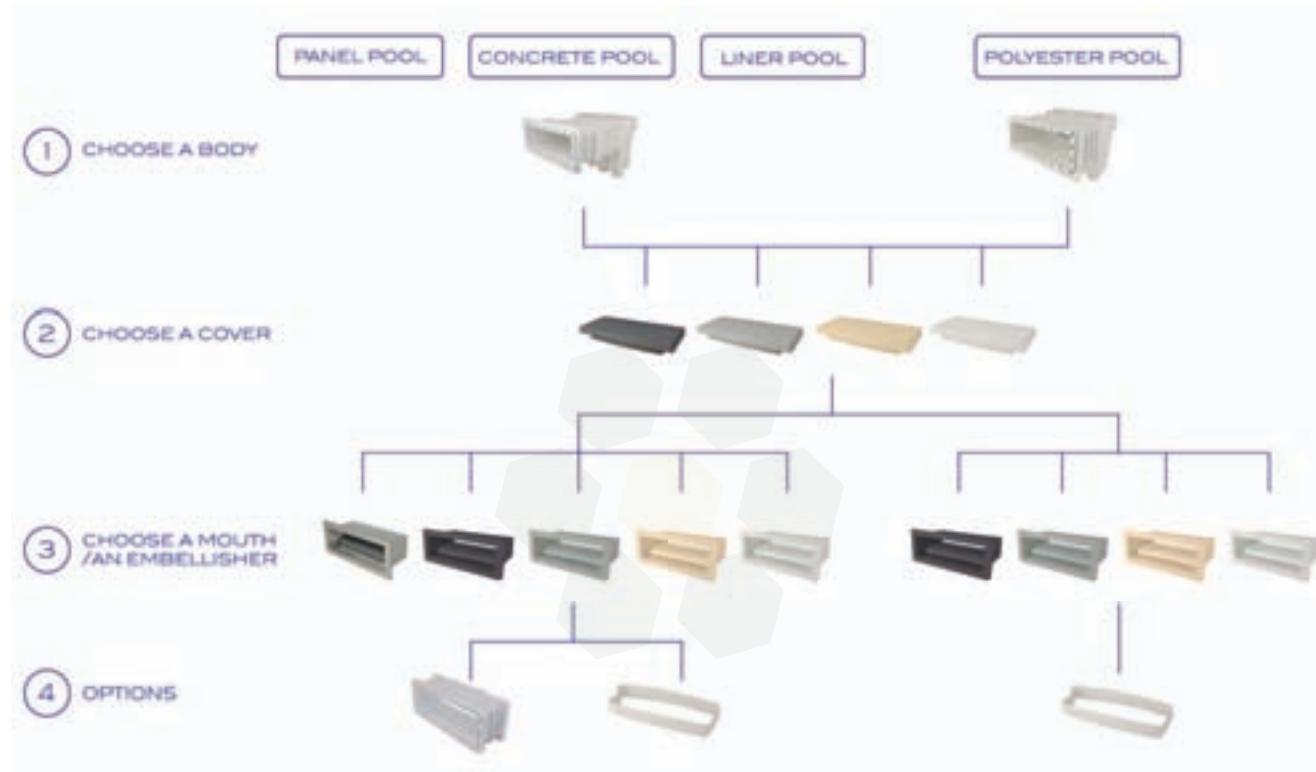

INSTALLATION

How to install skimmer mouth?



How to integrate cover in the pool surround material?



How to assemble skimmer UNIK?




How to glue panels version?




DIMENSIONS OF THE KITS


74457 - 74458 - 74459 - 74460

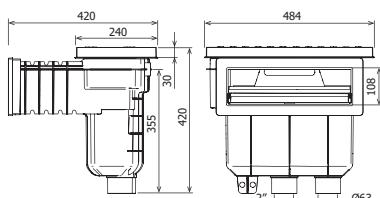

74461 - 74462

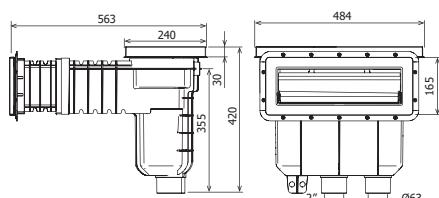

74463 - 74464

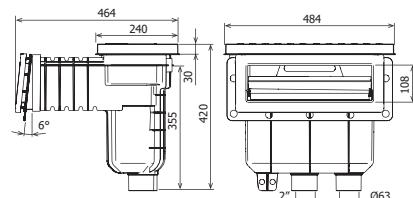

ABS SKIMMERS

UNIK skimmer 25L



Complies with Standards
EN 16582-1
EN 16713-2



Skimmer Unik

components to install a Skimmer Unik

The skimmer Unik is a solution that allows maximum flexibility in terms of colors of the visible parts.

Choose amongst the components according to your requirements.

1

Skimmer body - ABS white color



	Code
Skimmer body CONCRETE POOL WITHOUT INSERTS	74830
Skimmer body CONCRETE POOL WITH INSERTS	74831
Skimmer body LINER POOL WITHOUT INSERTS*	74832
Skimmer body LINER POOL WITH INSERTS*	74833
Skimmer body PANEL POOL WITHOUT INSERTS	74834
Skimmer body PANEL POOL WITH INSERTS	74835
Skimmer body POLYESTER POOL 6° WITHOUT INSERTS	74836
Skimmer body POLYESTER POOL 6° WITH INSERTS	74837

* Delivered with 2 sets of screws DIN 7982 A4 5.5x25 and 32

2

Skimmer covers - ABS



	Code
Skimmer cover WHITE	74838
Skimmer cover BEIGE	74838CL090
Skimmer cover GREY	74838CL129
Skimmer cover ANTHRACITE	74838CL144

3

Skimmer mouth / embellisher

3.1 - FOR CONCRETE LINER AND PANEL POOLS



	Code
Standard ABS WHITE	74839
Standard ABS BEIGE	74839CL090
Standard ABS GREY	74839CL129
Standard ABS ANTHRACITE	74839CL144
Standard STAINLESS STEEL A316-L	74806

3.2 - FOR POLYESTER POOLS



	Code
6° Mouth - WHITE	74840
6° Mouth - BEIGE	74840CL090
6° Mouth - GREY	74840CL129
6° Mouth - ANTHRACITE	74840CL144

Kit Skimmer UNIK ABS color white: Body + Cover + Embellisher



	Code
Skimmer UNIK CONCRETE POOL WITHOUT INSERTS	74457
Skimmer UNIK CONCRETE POOL WITH INSERTS	74458
Skimmer UNIK LINER POOL WITHOUT INSERTS	74459
Skimmer UNIK LINER POOL WITH INSERTS	74460
Skimmer UNIK PANEL POOL WITHOUT INSERTS	74461
Skimmer UNIK PANEL POOL WITH INSERTS	74462
Skimmer UNIK POLYESTER POOL 6° WITHOUT INSERTS	74463
Skimmer UNIK POLYESTER POOL 6° WITH INSERTS	74464

Skimmer Options - valid for the skimmers parts sold separately or the full sets



	Code
EXTENDED Mouth Standard WITHOUT INSERTS	74841
EXTENDED Mouth Standard WITH INSERTS	74842
EXTENDED Mouth POLYESTER POOL 6° WITHOUT INSERTS	74843
EXTENDED Mouth POLYESTER POOL 6° WITH INSERTS	74844
COVER EXTENSION RING	74845
DOUBLE GASKET KIT - INSERTS FOR UNIK OPENINGS	74846-0500
DOUBLE GASKET KIT - SELF-TAPPING SCREWS FOR UNIK OPENINGS	74846-0600

ABS SKIMMERS

NORM skimmer 17.5L



NORM skimmer

ASTRALPOOL

DESCRIPTION

17L skimmer range suitable for installation in public and private pools. Manufactured in ABS with UV treatment, it comes with a weir flap, flow regulator, lid height adjustment and basket. The water inlet is 495 x 80 mm. Recommended flow rate of 7.5 m³/h. Install one skimmer every 25 m² of water line surface area. Connections under 1 1/2" and 2", water overflow connection of Ø 40 mm.

FOR CONCRETE POOLS




	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
NORM 17,5L skimmer				
White	58707	1	5.61	0.182
Beige	58707CL090	1	5.61	0.182
Light grey	58707CL129	1	5.61	0.182
Anthracite grey	58707CL144	1	5.61	0.182

FOR LINER AND PREFABRICATED POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For prefabricated pools with inserts				
White	56176	1	5.61	0.182
Beige	56176CL090	1	5.61	0.182
Light Grey	56176CL129	1	5.61	0.182
Anthracite Grey	56176CL144	1	5.61	0.182
For prefabricated pools without inserts				
White	56299	1	5.61	0.182
Beige	56299CL090	1	5.61	0.182
Light Grey	56299CL129	1	5.61	0.182
Anthracite Grey	56299CL144	1	5.61	0.182
NORM 6° for prefabricated pools with inserts	57114	1	5.61	0.182

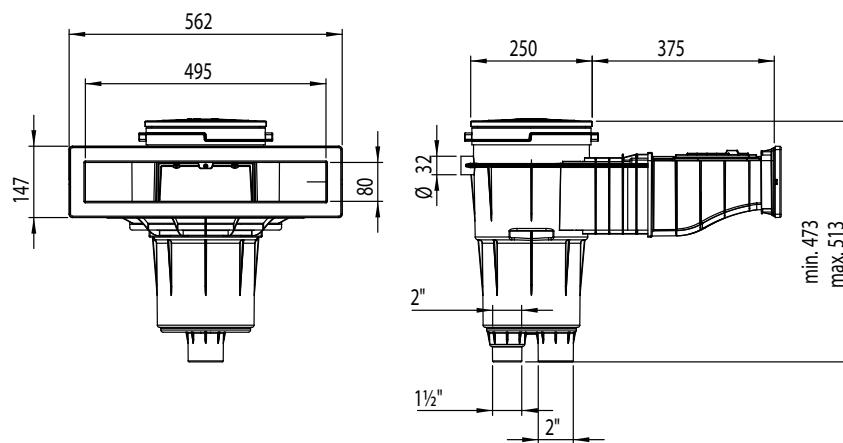

Complies with Standards
EN 16582-1 EN 16713-2

ABS SKIMMERS

17.5 L skimmers

- All of the components that are exposed in this range of skimmers come with a UV treatment. Made of ABS, they come with a weir flap and a flow regulator check valve. Bottom suction nozzle connection: 1½" inner thread.
- Simultaneous connection to the main drain: 2" inner thread. Overflow connection: Ø 32 mm. Round cover with spring clip fastening system.
- The height of the cover can be adjusted and turned through an extended throat, so that it sits perfectly flush with the coping stone.
- Leaf trap secured to base by means of a bayonet mount. In-built weir flap housing. Recommended flow rate: 7.5 m³/h.
- It is recommended that one skimmer be installed for every 25 m² of water surface area.



Complies with Standards
EN 16582-1
EN 16713-2


Skimmer with standard mouth opening

ASTRALPOOL 

FOR CONCRETE POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With square lid	11306	1	4.20	0.062

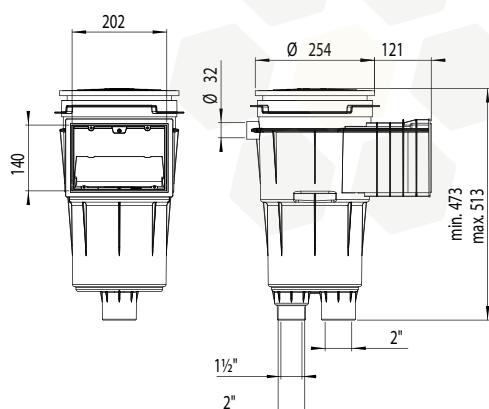

Complies with Standards
EN 16582-1
EN 16713-2


Skimmer with standard opening and face plate

ASTRALPOOL 

FOR CONCRETE POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With square lid	11302	1	5.20	0.062

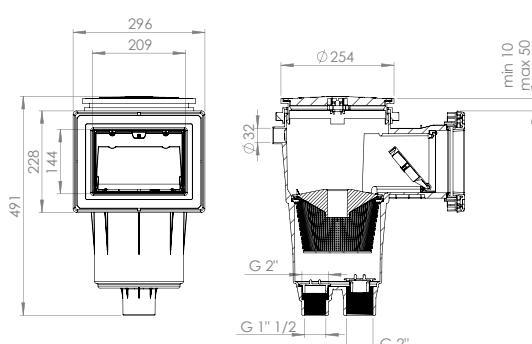

ABS SKIMMERS

17.5 L skimmers




Skimmer

with standard opening and extended throat

ASTRALPOOL 

FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With square lid	11307	1	5.90	0.077

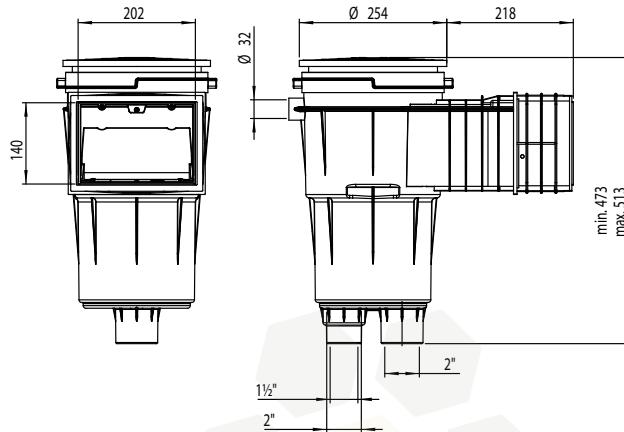Complies with Standards
EN 16582-1
EN 16713-2


Skimmer

with standard opening, extended throat and face plate

ASTRALPOOL 

FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With square lid	11303	1	5.75	0.060

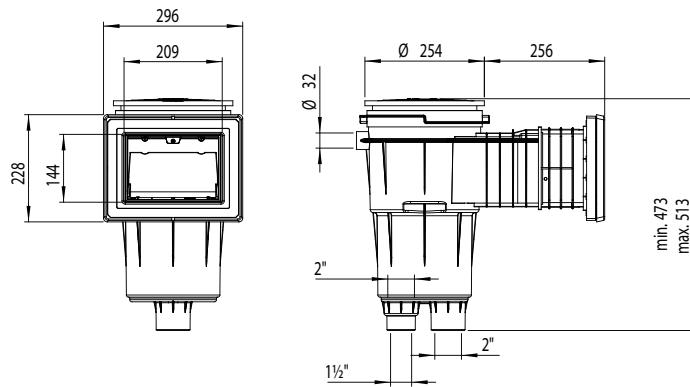Complies with Standards
EN 16582-1
EN 16713-2

ABS SKIMMERS

17.5 L skimmers

**Skimmer** with wide mouth openingASTRALPOOL 

FOR CONCRETE POOLS

Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------


With square lid

11304

1

6.24

0.135

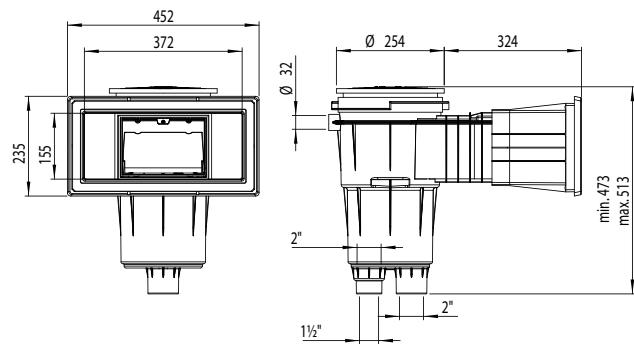**Skimmer** with extended throat and wide openingASTRALPOOL 

FOR CONCRETE POOLS

Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------


With square lid

11305

1

6.90

0.161

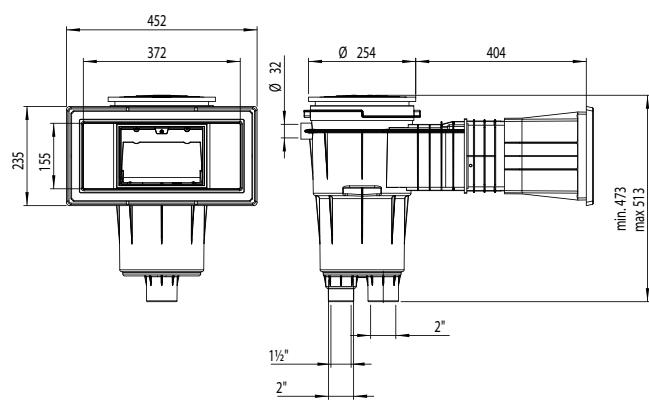

ABS SKIMMERS

17.5 L skimmers



Complies with Standards
EN 16582-1
EN 16713-2

Skimmer with standard mouth opening

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS



Supplied with adhesive gaskets, flange and screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------

Skimmer with square cover



White	11309	1	5.30	0.062
Beige	11309CL090	1	5.30	0.062
Light Grey	11309CL129	1	5.30	0.062
Anthracite Grey	11309CL144	1	5.30	0.062

Skimmer 6° for polyester pool with square cover, with inserts

White	35664	1	6.00	0.062
-------	-------	---	------	-------

Skimmer 6° for polyester pool with round cover, without inserts

White	68108	1	6.00	0.062
Beige	68108CL090	1	6.00	0.062
Light grey	68108CL129	1	6.00	0.062
Anthracite grey	68108CL144	1	6.00	0.062

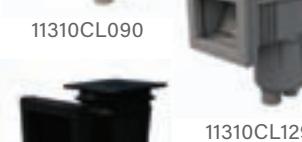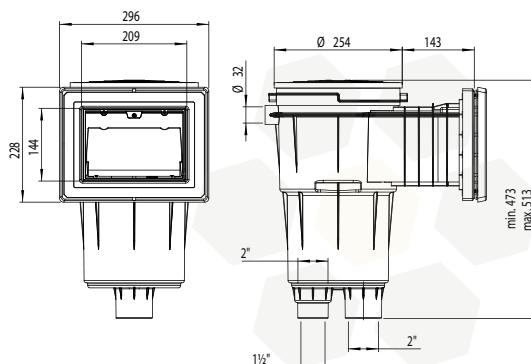

Complies with Standards
EN 16582-1
EN 16713-2

Skimmer with standard opening and extended throat

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS




Supplied with adhesive gaskets, flange and screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------

With square cover

White	11310	1	5.90	0.077
Beige	11310CL090	1	5.90	0.077
Light Grey	11310CL129	1	5.90	0.077
Anthracite Grey	11310CL144	1	5.90	0.077

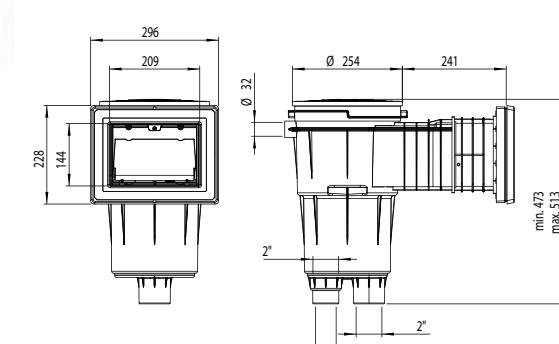

* Available until end of stocks

ABS SKIMMERS

17.5 L skimmers



Complies with Standards
EN 16582-1
EN 16713-2

Skimmer with wide mouth opening


ASTRALPOOL A®

FOR LINER AND PREFABRICATED POOLS



Supplied with adhesive gaskets, flange and screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
With square cover				
White	11311	1	6.52	0.135
Beige	11311CL090	1	6.52	0.135
Light Grey	11311CL129	1	6.52	0.135
Anthracite Grey	11311CL144	1	6.52	0.135
With square cover for PARKER models				
White	11317	1	6.52	0.135
Beige	11317CL090	1	6.52	0.135
Light Grey	11317CL129	1	6.52	0.135
Anthracite Grey	11317CL144	1	6.52	0.135
With square cover - 6° for polyester pool				
White	35665	1	6.12	0.135

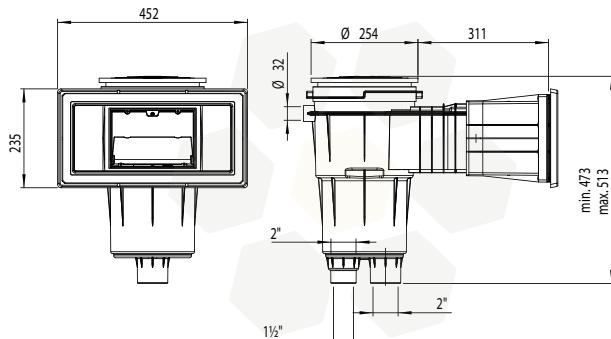

Complies with Standards
EN 16582-1
EN 16713-2

Skimmer with wide opening and extended throat

ASTRALPOOL A®

FOR LINER AND PREFABRICATED POOLS



Supplied with adhesive gaskets, flange and screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Square cover				
Square cover	11313	1	7.00	0.161
Square cover for PARKER models	11314	1	7.00	0.161

ABS SKIMMERS

17.5 L skimmers



Complies with Standards
EN 16582-1
EN 16713-2

Panel Protect skimmer inside assembly

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

Skimmers for panel pools. The wide opening assembly should be fitted to the panel from the inside. Supplied with glue. Item 30867 is compatible with EASYCOLOR Inlet sheath item 73166CLXXX to an easy color change of the skimmer embellisher and the floater. This sheath could be installed without change the skimmer mouth what is very practical to renew or upgrade pools.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
17.5 l Panel Protect skimmer wide opening, square cover	30867	1	6.20	0.116
Glue for ABS	30884	25	5.05	0.12



Complies with Standards
EN 16582-1


Skimmer SPS 250

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

17.5 l skimmer with a length (250 mm) suitable for installation in pools made of expanded polystyrene blocks. In addition, thanks to its configuration, it brings the water level up to the edge of the finish. Manufactured in white ABS with UV treatment, the SPS 250 incorporates a gate, flow regulator and leaf collection basket. Recommended flow: 7.5m³/h. Install a skimmer every 25 m² of water surface. Ø 63 mm and 2" bottom connections, Ø 32 mm excess water connection. .

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Skimmer with inserts	58382	1	3.50	0.037

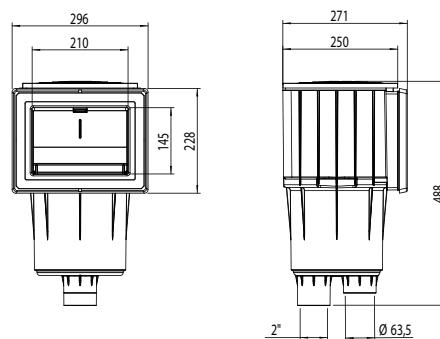

ABS SKIMMERS

Filtering skimmer



73158
73159
73160

73161
73162
73163

Filtering Skimmer

DESCRIPTION

17.5 L skimmer with cartridge system integrated. Made of ABS with UV treatment. Incorporate gate, regulator lid height, skimmer basket and 2 cartridge filters. Upper access water connection Ø 32 mm, bottom connections of Ø 63 mm and lateral of Ø 50 mm. Lateral connections are for connecting suction nozzles.

The color change is proposed with an inlet sheath, both the embellisher and the floater. This sheath could be installed without changing the skimmer mouth what is very practical to renew or upgrade pools.

FOR CONCRETE POOLS



Filtering skimmer - white

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Filtering skimmer with 2 cartridges 16 m ³	73158	1	12	0.32
Filtering skimmer with 2 cartridges 20 m ³	73161	1	13	0.32



73164
73165

FOR LINER AND PREFABRICATED POOLS

Prefabricated pools - white⁽¹⁾

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Filtering skimmer with 2 cartridges 16m ³	73159	1	12	0.32
Filtering skimmer with 2 cartridges 20m ³	73162	1	13	0.32

Panels pools - white

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Filtering skimmer with 2 cartridges 16m ³	73160	1	12.5	0.32
Filtering skimmer with 2 cartridges 20m ³	73163	1	13.5	0.32

Cartridge

Cartridge 16 m ³ /h - 15 microns	73164	1	1.64	0.02
Cartridge 20 m ³ /h - 15 microns	73165	1	2.24	0.026




Can be complemented with EASYCOLOR color covers, code 73166.



Complies with Standards
EN 16713-1



Complies with Standards
EN 16582-1
EN 16713-2

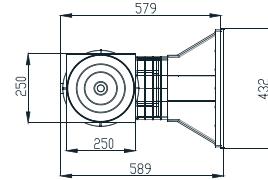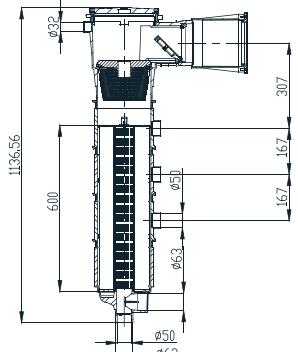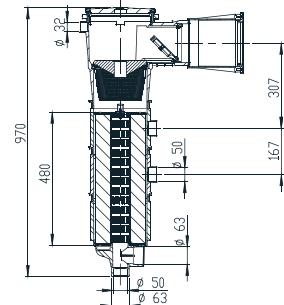

73166CL129



73166CL1144

73166CL090

(1) Codes 73159 and 73162 will be delivered with 2 sets of screws - DIN 7982 A4 5.5x25 and 32.

15 L skimmers

- All of the components that are exposed in this range of skimmers come with a UV treatment.
- Made of ABS, they come with a weir flap and a flow regulator check valve.
- Bottom suction nozzle connection: 1½" inner thread, 2" outer thread.
- Simultaneous connection to the main drain: Ø 50 mm inner wall.
- Overflow connection: Ø 40 mm.
- Leaf trap.
- Recommended flow rate: 7.5 m³/h.
- It is recommended that one skimmer be installed for every 25 m² of water surface area.
- All skimmers come in two different models: the model with inserts and the PARKER model, which is supplied with self-tapping screws.


Skimmer with standard mouth opening



Complies with Standards
EN 16582-1
EN 16713-2

FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With round lid - White	00249	1	2.95	0.059
With round lid - Beige	00249CL090	1	2.95	0.059
With round lid - Light grey	00249CL129	1	2.95	0.059
With round lid - Anthracite grey	00249CL144	1	2.95	0.059
With square lid	00250	1	3.15	0.059

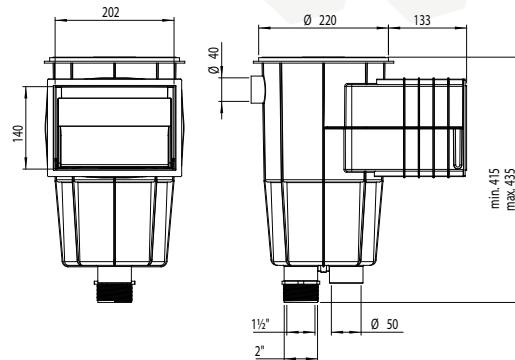

ABS SKIMMERS

15 L skimmers



Skimmer with standard mouth opening


ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS



Supplied with adhesive gasket, bi-injection moulded frame, flange and screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Comes with round snap-on cover				
White	01461	1	4.0	0.059
Beige	01461CL090	1	4.0	0.059
Light Grey	01461CL129	1	4.0	0.059
Anthracite Grey	01461CL144	1	4.0	0.059
Comes with square snap-on cover				
White	01462	1	4.2	0.059

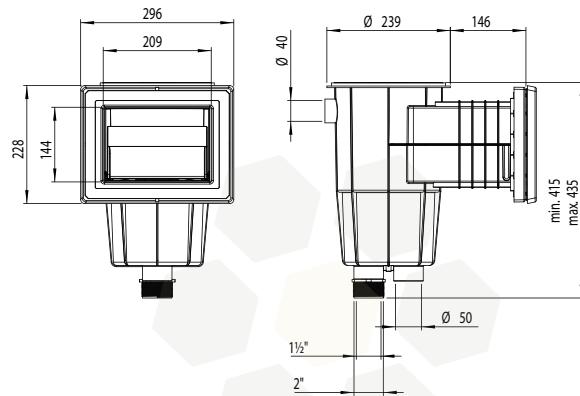


Skimmer with wide mouth opening

ASTRALPOOL 

FOR CONCRETE POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m³
With round lid - White				
With round lid - Beige	00251	1	4.47	0.12
With round lid - Light grey	00251CL090	1	4.47	0.12
With round lid - Anthracite grey	00251CL129	1	4.47	0.12
With square lid	00251CL144	1	4.47	0.12
	00252	1	3.00	0.12

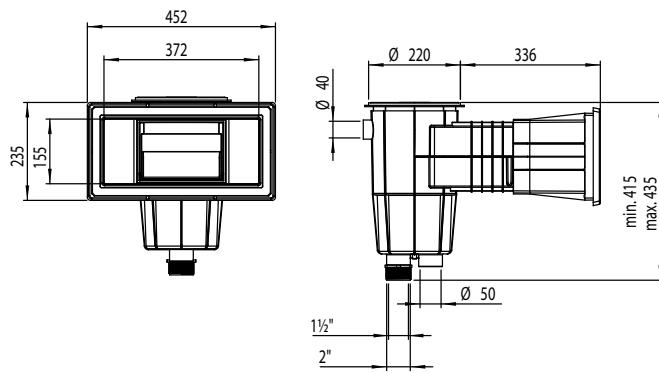Complies with Standards
EN 16582-1
EN 16713-2

15 L skimmers




FOR LINER AND PREFABRICATED POOLS

Supplied with adhesive gaskets, flange and screws.



	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Round cover, small embellisher				
White	01463	1	5.28	0.12
Square cover with round faceplate, small embellisher				
White	01464	1	5.28	0.12
Square cover with square faceplate, big embellisher that covers the flange				
White	34413	1	5.04	0.12
Beige	34413CL090	1	5.04	0.12
Light Grey	34413CL129	1	5.04	0.12
Anthracite Grey	34413CL144	1	5.04	0.12

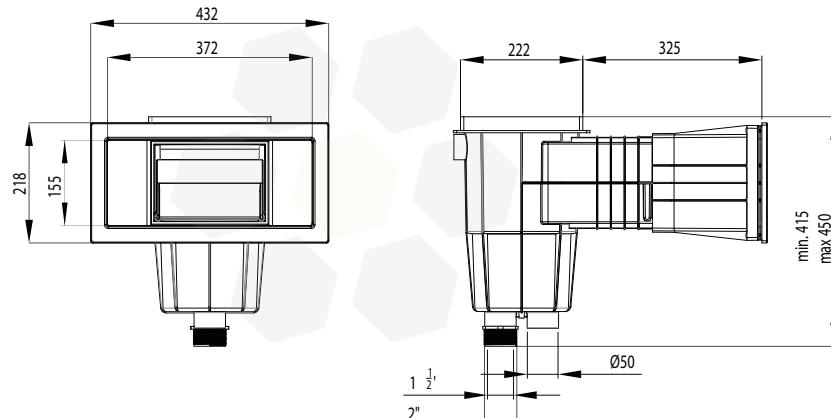Complies with Standards
EN 16582-1
EN 16713-2Skimmer for polyester pools
with wide mouth

FOR LINER AND PREFABRICATED POOLS

15L skimmer, square cover. This skimmer doesn't include gaskets. The installer should insure water tightness between the skimmer and the polyester.

Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White	06470	1	4.32	0.12

ABS SKIMMERS

15 L skimmers



Complies with Standards
EN 16582-1
EN 16713-2

Panel Protect skimmer



FOR LINER AND PREFABRICATED POOLS



Supplied with adhesive gaskets, flange and screws. Skimmers specially designed for panel pools. The wide opening assembly should be fitted to the panel from the inside. Supplied with glue. Item 30866 is compatible with EASYCOLOR Inlet sheath item 73166CLXXX to an easy color change of the skimmer embellisher and the floater. This sheath could be installed without change the skimmer mouth what is very practical to renew or upgrade pools.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
15 l Panel Protect skimmer wide opening, square cover	30866	1	5.13	0.116
Glue for ABS	30884	1	0.20	0.001



Floating skimmer



FOR LINER AND PREFABRICATED POOLS



Diameter 160 mm. Maximum flow rate: 5 m³/h. Ø 32 mm and Ø 38 mm outer connections. With plastic support clamp designed for panel pools.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	16573	1	1.3	0.024

ABS SKIMMERS

Skimmer accessories



FOR ALL TYPES OF POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Round cover, round face plate				
Beige	00249-0600CL090	23	7.9	0.069
Light grey	00249-0600CL129	23	7.9	0.069
Anthracite grey	00249-0600CL144	23	7.9	0.069
Round cover, square face plate				
Beige	00249-0700CL090*	13	6.9	0.069
Light grey	00249-0700CL129*	13	6.9	0.069
Anthracite grey	00249-0700CL144*	13	6.9	0.069

* Compatibles with level regulator 15862 for a color customization of the level regulator.



FOR ALL TYPES OF POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Round cover, round face plate				
Beige	05280-0600CL090	15	8	0.069
Light grey	05280-0600CL129	15	8	0.069
Anthracite grey	05280-0600CL144	15	8	0.069
Round cover, square face plate				
Beige	05280-0700CL090	15	8	0.069
Light grey	05280-0700CL129	15	8	0.069
Anthracite grey	05280-0700CL144	15	8	0.069



EASYCOLOR - Inlet Sheath

for wide mouth skimmers

FOR ALL TYPES OF POOLS

The EASYCOLOR inlet sheath kit allows to change the color of the skimmers wide mouth items 00251, 00252, 01463, 01464, 11304, 11305, 11311, 11314, and 11317, both the embellisher and the floater. This sheath could be installed without change the skimmer mouth what is very practical to renew or upgrade pools. This kit includes inlet sheath, floater, flanges and embellisher.


	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Beige - inlet sheath	74035CL090	1	1.22	0.022
Light grey - inlet sheath	74035CL129	1	1.22	0.022
Anthracite grey - inlet sheath	74035CL144	1	1.22	0.022
For Filtering Skimmer and Panel Protect Skimmer				
Light grey - inlet sheath	73166CL129	1	1.22	0.02
Anthracite - inlet sheath	73166CL144	1	1.22	0.02
Beige - inlet sheath	73166CL090	1	1.22	0.02

73166CL090



ABS SKIMMERS

Skimmer accessories

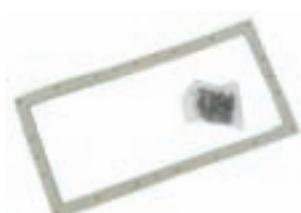

Double gasket kits for skimmers



FOR LINER AND PREFABRICATED POOLS



Kits made up of a double gasket and the screws necessary for the installation of skimmers in panel pools. Made of TPE, the kit enables the installation of various accessories in pool shells and protects the panelling from coming into contact with water. Easy to install. Prevents corrosion of the panelling in the area that has been die cut.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Inserts for wide openings	14516-0500	50	-	0.070
Self-tapping screws for wide openings	14516-0600	50	-	0.070
Inserts for standard openings	27124-0500	80	-	0.035
Self-tapping screws for standard openings	27124-0600	80	-	0.035
Inserts for Norm openings	57289-0500	40	-	0.070
Self-tapping screws for Norm openings	57289-0600	40	-	0.070
Inserts for UNIK openings	74846-0500	20	-	0.070
Self-tapping screws for UNIK openings	74846-0600	20	-	0.070



Extension ring 15 l skimmer cover



FOR CONCRETE POOLS

Additional extension ring to increase the distance between the 15 l skimmer and the lid. Additional distance of 25 mm. Made of ABS. The height can be increased by overlaying various connections. It can also be slightly tipped to be level with the ground.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	19919	17	4.08	0.069



Extension ring 17.5 l skimmer cover



FOR CONCRETE POOLS

Additional ring for better adjusting and levelling the 17.5 l skimmer lid to the deck level. Additional distance of 20 mm. Made of white ABS. The height can be increased by overlaying various connections. It can also be slightly tipped to be level with the ground.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	18153	17	4.70	0.06

Skimmer accessories



Floating weir assembly in ABS

FOR ALL TYPES OF POOLS

Float set with strainer basket in white ABS. Its utility is to retain the filtered leaves in the basket.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For 15 l skimmers	00253	12	20.5	0.207
For 17.5 l skimmers	05703	12	20.5	0.207



Prefilters for skimmer basket

FOR ALL TYPES OF POOLS

Hygienic disposable prefilters for any type of skimmer (with baskets up to Ø 24 cm). They retain the waste that builds up in the skimmer basket. This protects the pump and the filter therefore performs better.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
12 units per box	042745	12	0.40	0.006

SLIM skimmer

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2



SLIM: High water level skimmer

FOR CONCRETE POOLS



High water level skimmer allows high water level in the pool (+/- 4 cm) giving an infinite pool effect. The water line is located very close to the top of the pool. Entirely made of AISI-316L. All models are equipped with Ø50 mm overflow and have a housing to mount a water level regulator - item 73453 - not included. Also compatible with the most standard water levels of the market. With connection for equipotential connection. It also includes flanges for prefabricated pools. Recommended flow 7.5 m³/h. Basket capacity 1.2 L.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Mouth width 500 mm	73501	1	14.80	0.136
Mouth width 650 mm	73502	1	15.20	0.169

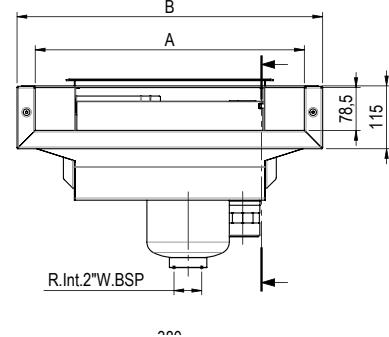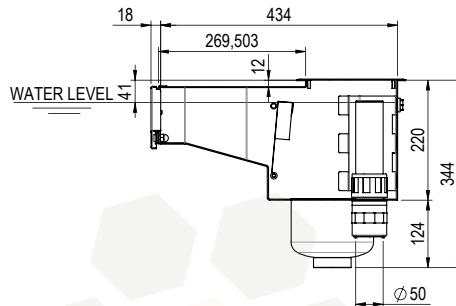Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

SLIM: S.S. Skimmer A-500 & A-650



Large mouth



FOR CONCRETE AND LINER POOLS

In AISI-316L stainless steel. With Ø50mm overflow, basket and lid in stainless steel, both included. It has accommodation to mount the level regulator valve 73453 (see page 113). With connection for equipotential connection. Flow recommended 7.5 m³ / h. Items 56313 and 56316 includes flanges for liner applications. Also exist with 6° inclination: items 72744 and 72743 see page 109. Water level +/- 8 cm. Basket capacity 1.2L.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Mouth width 500 mm	56313	1	14.84	0.136
Mouth width 650 mm	56316	1	14.84	0.136

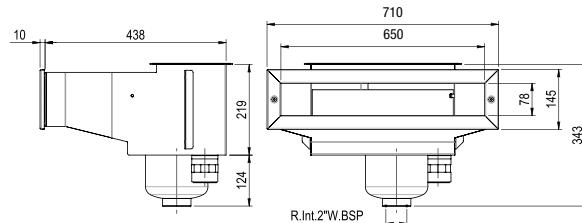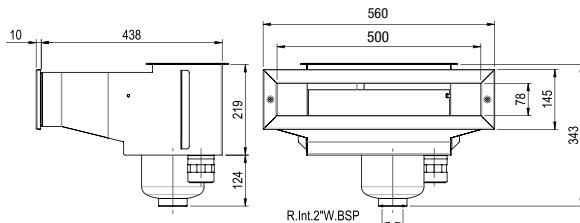

STAINLESS STEEL SKIMMERS

Stainless steel skimmers



SLIM: S.S. Skimmer A-500

Large mouth

ASTRALPOOL




FOR POLYESTER POOLS

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

In AISI-316L stainless steel. With Ø 50 mm overflow, basket and lid in stainless steel, both included. It has accommodation to mount the level regulator valve 73453 (see page 113). With connection for equipotential connection. Flow recommended 7.5 m³ / h. Water level +/- 8 cm. basket capacity 1,2L.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Mouth width 500 mm, 6° inclination	72744	1	14.84	0.136
Mouth width 650 mm, 6° inclination	72743	1	14.84	0.136

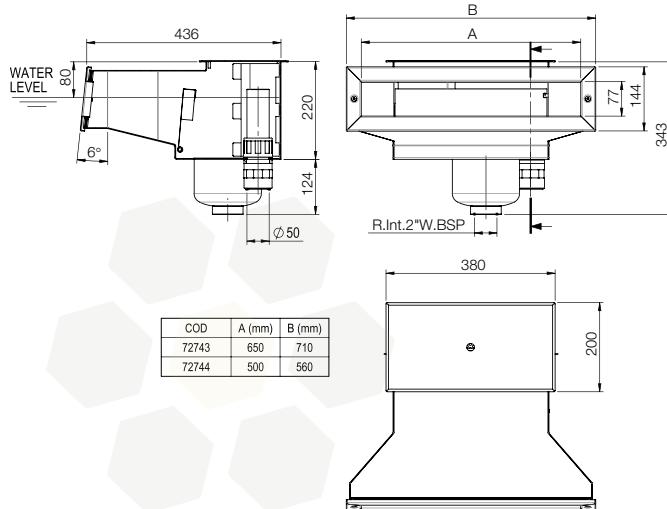Complies with Standards
EN 16582-1
EN 16713-2

Full A-100 Skimmer S.S.


ASTRALPOOL



FOR CONCRETE POOLS

In AISI-316L stainless steel. With Ø 50mm overflow. Stainless Steel basket and lid included. Basket capacity 1.2 L. Comes with housing for assembling the 00256 level regulator valve (see page 113). With connection for an equipotential outlet. Recommended flow rate: 7.5 m³/h. Does not include trim code 00255. For liner, prefabricated and panel pools use coupling kit 07525 not included.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Suction connection, 2" thread	00254	1	8.4	0.04

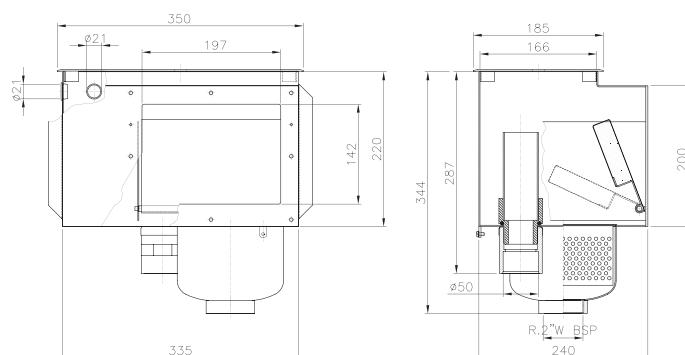

STAINLESS STEEL SKIMMERS

Stainless steel skimmers



Complies with Standards
EN 16582-1
EN 16713-2

Decorative face plate



FOR CONCRETE POOLS

For skimmer 00254. Made of AISI-316L stainless steel.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00255	1	0.62	0.003



Complies with Standards
EN 16582-1
EN 16713-2

A-201 skimmer body



FOR CONCRETE POOLS

In AISI-316L stainless steel. With Ø 50mm overflow. Skimmer housing without telescopic lid. Comes with housing for assembling the 00256 level regulator valve (see page 113). With connection for an equipotential outlet. Basket can be removed from front. Does not include trim code 07251. Ø 63 mm suction connection. For liner, prefabricated and panel pools use coupling kit 07525 not included.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
07520	1	6.51	0.04



Complies with Standards
EN 16582-1
EN 16713-2

A-202 skimmer body



FOR CONCRETE POOLS

In AISI-316L stainless steel. With Ø 50 mm overflow. Skimmer housing without telescopic lid. With earth connection. Basket can be removed from front. Does not include trim code 07251. For liner, prefabricated and panel pools use coupling kit 07525 not included.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
07610	1	5.25	0.04

STAINLESS STEEL SKIMMERS

Stainless steel skimmers



Basket for A-201 and A-202 skimmers



FOR CONCRETE POOLS

Basket in AISI-316L stainless steel. Includes face plate for direct removal through skimmer opening. Basket capacity 4.6L.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
07521	1	2.19	0.02

Complies with Standards
EN 16582-1
EN 16713-2



A-400 skimmer body




FOR CONCRETE POOLS

In AISI-316L stainless steel. With Ø 50mm overflow. Skimmer housing without telescopic lid. Comes with housing for assembling the 00256 level regulator valve (see page 113). With connection for an equipotential outlet. For liner, prefabricated and panel pools use coupling kit 07526 not included.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
07523	1	8.0	0.06

Complies with Standards
EN 16582-1
EN 16713-2

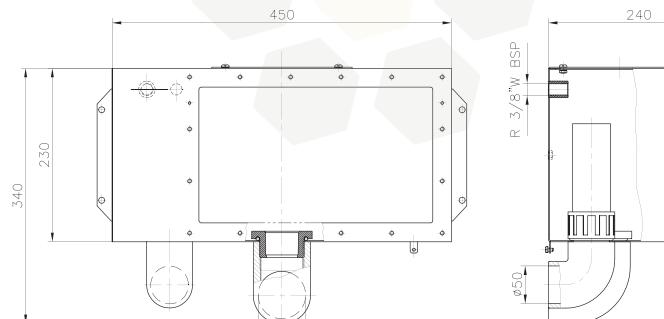

Basket for A-400 skimmer



FOR CONCRETE POOLS

Direct removal through skimmer throat. Wide model. In AISI-316L stainless steel. Basket capacity 11L.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
07522	1	3.5	0.04

Complies with Standards
EN 16582-1
EN 16713-2

STAINLESS STEEL SKIMMERS

Stainless steel skimmers accessories



Complies with Standards
EN 16582-1
EN 16713-2

Coupling kit for stainless steel skimmers



FOR LINER AND PREFABRICATED POOLS

For liner, prefabricated and panel pools. Includes: 2 elastic gaskets, AISI-316 stainless steel frame and screws for assembling.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For A-100, A-201 and A-202 skimmers (00254, 07520 and 07610)	07525	1	0.78	0.002
For A-400 skimmer (code 07523)	07526	1	1.13	0.01



56344



56340



74101

Stainless Steel embellisher for Skimmers



FOR LINER AND PREFABRICATED POOLS

AISI-316L embellishers for ABS skimmers. Includes flange, screws and gaskets.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
ABS standard mouth skimmers items 01461 (15L), 01462 (15L), 11309 (17.5L), 11310 (17.5L)	56344	1	1.5	0.004
ABS wide mouth skimmers items 01463 (15L), 01464 (15L), 11311 (17.5L), 11313 (17.5L)	56340	1	1.87	0.005
ABS skimmer NORM item 56176	74101	1	1.76	0.001



Telescopic lid



FOR CONCRETE POOLS

In AISI-316L stainless steel. For models A-201, A-202 and A-400. 180 x 180 mm lid. Adjustable height from 60 to 110 mm.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	07524	1	1.63	0.01



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

Level regulators



Universal level regulator



FOR ALL TYPES OF POOLS

Made of ABS. May be connected from the bottom or side, as required. Semi-die cut outlets to the pool so that the most suitable connection can be made. Adjustable lid height and level. For all types of skimmers. Cover color can be changed using the 15L skimmers covers from page 105.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
15862	1	2.0	0.016



Water level regulator valve



FOR CONCRETE POOLS

Can be fitted to all stainless steel skimmers, except for model A-202, 56313-56316-72743-72744-73501-73502. Adjustable opening. 3/8" connection.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00256	1	0.21	0.002



Level regulating valve



FOR CONCRETE POOLS

Level regulator valve compatible with the stainless steel skimmers of SLIM range. Compatible with items: 56313, 56316, 72743, 72744, 73501 73502. With 3/8" side connection and adjustable floater.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
73453	1	0.9	0.008



Pool main drains information

Pool main drains information

EN 16713-02: 2016 - main drains

RISK OF ENTRAPMENT

How to prevent it?

NEW POOL

ANTI-VORTEX COVER

Number of main drains per pool: **1**.

NON ANTI-VORTEX COVER

Number of main drains per pool: **2** balanced main drains, **distanced at minimum 1 meter**.

And if any of the **2 main drains** is **blocked**, the remaining **one should be able to absorb 100%** of the installation flow.

POOL RENOVATION

WITH MAIN DRAIN BODY CHANGE

Applies **new pool rules**.

UNCHANGED MAIN DRAIN BODY

Install an **anti-vortex grille** on pre-installed main drain.

CAVITY DIMENSION

Main drain should respect a certain cavity dimensions according to a mathematical rule.

OTHERS

Other requisites are considered to define that a main drain is compliant with EN, like design.

e.g. the design of the grill to avoid human body parts or hair entrapment.

Suction rate: insure a maximum of 0.5 m/s paragraph 4.6.1

Only with the fulfillment of all requisites of the standard, a Compliance Certification can be delivered!

*Anti-vortex plate is a special component installed in the suction line to control the turbulence in a flowing fluid. These plates allows to control the velocity of the fluid thus preventing cavitation in the fluid according to UNE-EN 13451-3.

ABS MAIN DRAINS

NORM main drains

- All main drains in the range are supplied with UV protection.
- To prevent the risk of suction, install the main drains according to local regulations.
- Recommended use: Maximum suction rate of 0.5 m/s.



Also available in other colours

NORM main drain

DESCRIPTION

Range of main drains suitable for public and private swimming pools. Supplied with flat or antivortex grilles. Manufactured in ABS with UV treatment, fitted with a 2" side outlet and a 1½" bottom outlet connection, bottom outlet covered by semi-die cut tab.



FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Antivortex grating - White	56379	4	10.60	0.069
Antivortex grating - Beige	56379CL090	4	10.60	0.069
Antivortex grating - Light Grey	56379CL129	4	10.60	0.069
Antivortex grating - Anthracite Grey	56379CL144	4	10.60	0.069
Flat grating - White	56378	4	10.60	0.069
Flat grating - Beige	56378CL090	4	10.60	0.069
Flat grating - Light Grey	56378CL129	4	10.60	0.069
Flat grating - Anthracite Grey	56378CL144	4	10.60	0.069

FOR LINER AND PREFABRICATED POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Antivortex grating with inserts				
White	56382	4	10.60	0.069
Beige	56382CL090	4	10.60	0.069
Light Grey	56382CL129	4	10.60	0.069
Anthracite Grey	56382CL144	4	10.60	0.069
Antivortex grating without inserts				
White	56383	4	10.60	0.069
Beige	56383CL090	4	10.60	0.069
Light Grey	56383CL129	4	10.60	0.069
Anthracite Grey	56383CL144	4	10.60	0.069
Flat grating with inserts				
White	56380	4	10.60	0.069
Beige	56380CL090	4	10.60	0.069
Light Grey	56380CL129	4	10.60	0.069
Anthracite Grey	56380CL144	4	10.60	0.069
Flat grating without inserts				
White	56381	4	10.60	0.069
Beige	56381CL090	4	10.60	0.069
Light Grey	56381CL129	4	10.60	0.069
Anthracite Grey	56381CL144	4	10.60	0.069

Only antivortex main drain



Complies with Standards
EN 13451-1
EN 13451-3

ABS MAIN DRAINS

Standard main drains

Complies with Standards
EN 16582-1

Round Ø 290 mm main drain

PARKER model



FOR LINER AND PREFABRICATED POOLS



2" side outlet and 1½" bottom outlet. Specially for liner pools. Built completely in white ABS. Comes with screws in stainless steel and synthetic adhesive gaskets. Side outlet for plug for testing water tightness. Bottom outlet for plug for fitting a hydrostatic valve code 00277 (see page 119) and drainage tube code 21581 (see page 119). Suction speed of 0.5 m/s. Maximum recommended flow rate: 13 m³/h. Fitted flush to pool floor for total drainage.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Main drain of ø 290 mm for liner pool	00270	4	5.71	0.044

Complies with Standards
EN 16582-1

Round Ø 270 mm main drain

with ABS grating



FOR CONCRETE POOLS



Bottom 1½" and side 2" outlets. Fully manufactured in white ABS. Side outlet for plug to test watertightness. Bottom outlet with plug and possibility of fitting a hydrostatic valve code 00277 (see page 119) and drainage tube code 21581, (see page 119). Ø 250mm suction grille. Max. flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard thread	01466	4	5.0	0.045



01467

01467CL090



01467CL129

01467CL144

Round Ø 210 mm main drain

with ABS grille



DESCRIPTION

2" side outlet. Body and grille in ABS. Comes with self-adhesive gaskets, flange and screws. Maximum recommended flow rate: 13 m³/h.



FOR CONCRETE POOLS

Body and grill in ABS. Grill fitted using screws. Max. flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard thread - White	01467	4	2.8	0.028
Standard thread - Beige	01467CL090	4	2.8	0.028
Standard thread - Light Grey	01467CL129	4	2.8	0.028
Standard thread - Anthracite Grey	01467CL144	4	2.8	0.028



00271

00271CL090



00271CL129

00271CL144

FOR LINER AND POLYESTER POOLS



Ø 210 mm main drain with ABS grille

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00271	4	4.0	0.033
Beige	00271CL090	4	4.0	0.033
Light Grey	00271CL129	4	4.0	0.033
Anthracite Grey	00271CL144	4	4.0	0.033

Ø 210 mm main drain with ABS grille, Parker

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	06474	4	4.0	0.033
Beige	06474CL090	4	4.0	0.033
Light Grey	06474CL129	4	4.0	0.033
Anthracite Grey	06474CL144	4	4.0	0.033

Complies with Standards
EN 16582-1

ABS MAIN DRAINS

Standard main drains

Round Ø 200 mm main drain
with antivortex grille

27837

DESCRIPTION

Manufactured in white ABS material. 2" side outlet and 1½" bottom outlet. Bottom outlet covered by semi-die cut socket, which can be opened as required. Possibility of fitting drainage tube code 21581 (see page 119). Max. flow rate: 13 m³/h.



FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard thread	27837	4	2.807	0.033



27125

FOR LINER AND PREFABRICATED POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	27125	4	3.543	0.033

Complies with Standards
EN 16582-1Round Ø 200 mm main drain
with flat grille

27839

DESCRIPTION

Made of white ABS. 2" side outlet and 1½" bottom outlet. Bottom outlet covered by a semi-die cut tab, which may be removed if necessary. A drainage pipe (code drainage code 21581, see page 119). Max. flow rate: 13 m³/h..



FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard thread	27839	4	2.807	0.033



27838

FOR LINER AND PREFABRICATED POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	27838	4	3.391	0.033

Complies with Standards
EN 16582-1

ABS MAIN DRAINS

Standard main drains



Mini main drain

ASTRALPOOL A®

FOR LINER AND PREFABRICATED POOLS



Side outlet drain assembly with 2" inner thread. Made of white ABS with grille fixed to flange. Suction velocity at grille of 0.5 m/s and flow rate of 11 m³/h. The slots in the grille are no larger than 8 mm, in compliance with regulations. M5 screws and brass inserts for fastening the flange and grille. Can be used in concrete spas and side suction inlets.

Complies with Standards
EN 16582-1

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Mini main drain - White	27814	4	2.64	0.013

Square 210 mm x 210 mm
main drain

ASTRALPOOL A®

FOR CONCRETE POOLS



2" side Outlet. Body and grille in White ABS. Grille fitted using screws. max. flow rate: 13 m³/h



00258 - 00273

Complies with Standards
EN 16582-1

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00258	4	4.0	0.044

FOR LINER AND PREFABRICATED POOLS



With 2" side outlet. Body and grille in ABS. Comes with self-adhesive gaskets, flange and screws. Maximum recommended flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00273	4	5.5	0.043



Ø 200 drain grille in ABS

ASTRALPOOL A®

FOR CONCRETE POOLS



Ring support and grille in white ABS. Supplied with grille fixing screws. This grille is for suction chamber done on site.

Complies with Standards
EN 16582-1

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00280	10	3.0	0.031

ABS MAIN DRAINS

ABS main drains accessories



74097

74097CL090



74097CL129

74097CL144

Complies with Standards
EN 16582-1Complies with Apt.4.4.1 b.2
of EN 16713-2:2017

Main drain grille

for pool standard compliance



FOR ALL TYPES OF POOLS

Grille to replace the grilles on already installed main drains in private pools, to meet pool regulations. Made of ABS. Compatible with main drains 01467, 27837, 27839.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille				
White	74097	6	3	0.033
Beige	74097CL090	6	3	0.033
Light grey	74097CL129	6	3	0.033
Anthracite grey	74097CL144	6	3	0.033



Hydrostatic valve



FOR CONCRETE AND LINER POOLS



To alleviate the pressure that can build up under the pool shell due to groundwater, it is recommended that a hydrostatic valve and a drainage pipe be fitted to the main drain. Hydrostatic valve to be fitted to the 2" bottom outlet on main drains. Made of white ABS, with stainless steel screw and spring. 1 1/2" male thread..

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00277	50	2.63	0.01



Drainage pipe



FOR CONCRETE AND LINER POOLS



Drainage pipe with 1 1/2" BSP thread connection for main drains with code numbers 01466, 27837 and 27839. Made of ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	21581	24	3.54	0.021

STAINLESS STEEL MAIN DRAINS

STYLE main drains



75180, 75181
75184, 75185



75182, 75183
751866, 75187



Complies with Standards
UNE-EN 16582-1 EN 16713-2
UNE-EN-16713-2

STYLE main drain

in stainless steel. Outlet 2"

DESCRIPTION

Range of main drains manufactured in full SS AISI-316L, fitted with an 2" side outlet connection.

The entire range shares the same main body, with different grating options, flat or antivortex and round or square grilles.

For liner applications come with gaskets and screws.

Maximum flow rate: 13 m³/h.

FOR CONCRETE POOLS




	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Round 2" - Antivortex grating	75180	1	3.97	0.026
Round 2" - Flat grating	75181	1	3.7	0.026
Square 2" - Antivortex grating	75182	1	4.2	0.026
Square 2" - Flat grating	75183	1	3.96	0.026


FOR LINER AND PREFABRICATED POOLS




	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Round 2" - Antivortex grating	75184	1	4.06	0.026
Round 2" - Flat grating	75185	1	3.79	0.026
Square 2" - Antivortex grating	75186	1	4.3	0.026
Square 2" - Flat grating	75187	1	4.05	0.026




75182-75186




75183-75187




75180-75184




75181-75185




75180-75184



75181-75185



75182-75186



75183-75187

Standard stainless steel main drains



00268



26196




Complies with Standards
UNE-EN 16582-1
UNE-EN-16713-2

FOR CONCRETE POOLS



2" side outlet. Made of stainless steel. AISI-316L. Grille fitted using screws. Maximum flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
2" side outlet"	00268	1	2.56	0.02
2" side outlet and 1 1/2" bottom outlet connection	26196	1	2.80	0.02

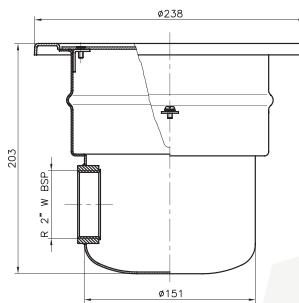

Complies with Standards
EN 16582-1

Round main drain in stainless steel




FOR LINER AND PREFABRICATED POOLS



2" side outlet. Made of AISI-316L stainless steel. Grille fitted using screws. Comes with gaskets, flange and screws. Maximum recommended flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
2" side outlet"	00275	1	2.27	0.02
2" side outlet and 1 1/2" bottom outlet connections	26197	1	4.23	0.04

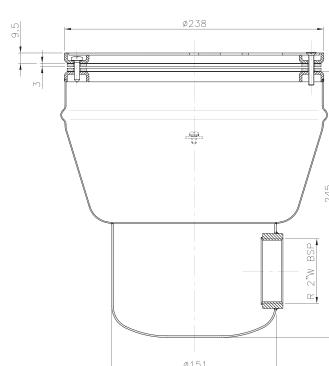

STAINLESS STEEL MAIN DRAINS

Standard stainless steel main drains



Complies with Standards
EN 16582-1
EN 16713-2

Main drain with square cover


in stainless steel. Outlet 1 1/2"



FOR CONCRETE POOLS

Bottom outlet 1 1/2". Manufactured in stainless steel. AISI-316L Antivortex lid. Can be used in concrete and prefabricated pools with an 00276 adapter. Maximum flow rate: 6 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Bottom 1 1/2" outlet	08463	1	1.14	0.01

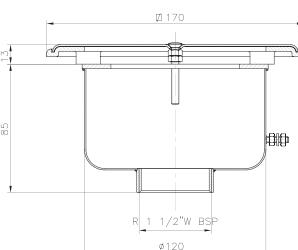

Main drain with square cover

in stainless steel. 2" outlet



FOR CONCRETE POOLS

2" side outlet. Manufactured in stainless steel. AISI-316L. Antivortex lid. Can be used in concrete and prefabricated pools with a 00276 adapter (see page 124). Maximum flow rate: 6 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00269	1	1.14	0.01



Ø 200 drain grille in stainless steel



FOR CONCRETE POOLS

Support ring in white plastic, grille in AISI-316L stainless steel. Supplied with grille fixing screws. Maximum recommended flow rate: 13 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00279	10	6.0	0.02



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2



Ø 300 drain grille in stainless steel



FOR CONCRETE POOLS

Support ring in aluminium, grille in AISI-316L stainless steel. Supplied with grille fixing screws. Maximum recommended flow rate: 27 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00282	4	5.8	0.02

Standard stainless steel main drains



Drain grille in stainless steel



FOR CONCRETE POOLS

Designed for concrete pools. Support frame and grille in polished stainless steel. Supplied with fixing screws. Other sizes can be made to order.

		Code	Standard Pack	Standard weight in kg	Standard volume in m ³
AISI-304L					
Size (mm) Max. recommended flow rate					
200 x 200	15 m ³ /h (0.5 m/s)	00284	1	1.2	0.01
300 x 300	43 m ³ /h (0.5 m/s)	00285	1	2.2	0.01
400 x 400	83 m ³ /h (0.5 m/s)	00286	1	4.0	0.03
500 x 500	136 m ³ /h (0.5 m/s)	00287	1	4.5	0.04
AISI-316L					
Size (mm) Max. recommended flow rate					
200 x 200	15 m ³ /h (0.5 m/s)	30764	1	1.2	0.01
300 x 300	43 m ³ /h (0.5 m/s)	30765	1	2.2	0.01
400 x 400	83 m ³ /h (0.5 m/s)	30766	1	4.0	0.03
500 x 500	136 m ³ /h (0.5 m/s)	30767	1	4.5	0.04

Stainless steel main drains accessories



74807
74808

Grille for S.S. main drains

for pool standard compliance

DESCRIPTION

Grille to replace the grilles on already installed main drains in private pools, to meet pool regulations. Made of SS AISI-316L.



FOR CONCRETE POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Antivortex main drain grille Compatible with main drains 00268, 26196	74807	1	0.8	0.017



Complies with Standards
UNE-EN 16582-1
UNE-EN-16713-2

FOR LINER AND PREFABRICATED POOLS



Grille to replace the grilles on already installed main drains in private pools, to meet pool regulations. Made of SS AISI-316L. Compatible with main drains 00275, 26197.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Antivortex main drain grille (Liner) Compatible with main drains 00275, 26197	74808	1	0.8	0.017

Stainless steel main drains accessories

**Adaptor kit for main drain**ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

For main drain 00269. Comes with gaskets, flange and screws. Flange in AISI-316L stainless steel.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00276	40	9.7	0.01



69173

**Stainless Steel embellisher
for ABS main drains**ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

AISI-316L embellishers for ABS main drains. It includes screws.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For ABS main drain 00270	69173	1	1.44	0.001
For ABS main drain 00271	69174	1	1.21	0.003



69174

ABS NOZZLES

NORM return inlet nozzles



56498



56499



56499CL090

56499CL129

56499CL144

Complies with Standards
EN 16582-1
EN 16713-2

DESCRIPTION

Range of inlets suitable for installation in public and private pools. Manufactured in white ABS with UV treatment.

FOR CONCRETE POOLS


	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For concrete pools	56498	24	4.5	0.020

FOR LINER AND PREFABRICATED POOLS



Range of inlets suitable for installation in public and private pools. Manufactured in ABS with UV treatment.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For prefabricated/liner pools				
White	56499	12	4.5	0.020
Beige	56499CL090	12	4.5	0.020
Light Grey	56499CL129	12	4.5	0.020
Anthracite Grey	56499CL144	12	4.5	0.020
For prefabricated pools				
White	56500	24	4.5	0.020
Beige	56500CL090	24	4.5	0.020
Light Grey	56500CL129	24	4.5	0.020
Anthracite Grey	56500CL144	24	4.5	0.020

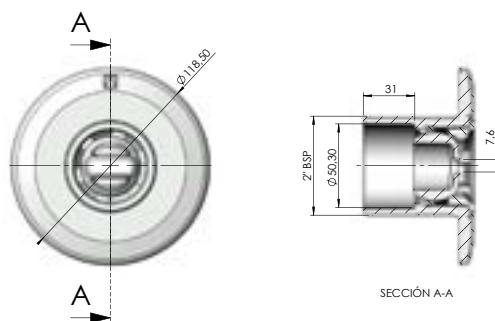


ABS NOZZLES

Multiflow return inlet nozzles

Multiflow system

- The inlet's eyeball is supplied pre-marked with a number of diameters (14-20 and 25). With the help of a punch (also supplied with the inlet) one of the diameters can be cut out at the time of installation.
- Max. recommended flow rate for a max. flow of 4 m/s:
 $\varnothing 14 \text{ mm} = 2.2 \text{ m}^3/\text{h}$, $\varnothing 20 \text{ mm} = 4.5 \text{ m}^3/\text{h}$, $\varnothing 25 \text{ mm} = 7 \text{ m}^3/\text{h}$

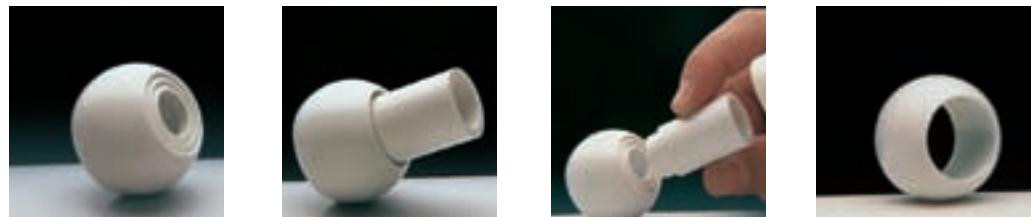

Multiflow return inlet nozzle

ASTRALPOOL 

FOR CONCRETE POOLS

Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White	00295	24	4.35	0.020
Beige	00295CL090	24	4.35	0.020
Light Grey	00295CL129	24	4.35	0.020
Anthracite Grey	00295CL144	24	4.35	0.020

Complies with Standards
EN 16582-1
EN 16713-2

Multiflow return inlet nozzle to be glued

ASTRALPOOL 

FOR CONCRETE POOLS

To be glued to $\varnothing 63 \text{ mm}$ PN 6 outer wall and $\varnothing 50 \text{ mm}$ inner wall. Made of ABS. Recommended for installation with wall conduits: code numbers 15661 and 15660.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White	00298	24	4.24	0.020
Beige	00298CL090	24	4.24	0.020
Light Grey	00298CL129	24	4.24	0.020
Anthracite Grey	00298CL144	24	4.24	0.020

ABS NOZZLES

Multiflow return inlet nozzles

00330



00330CL090



00330CL129



00330CL144

Complies with Standards
EN 16582-1
EN 16713-2**FOR LINER AND PREFABRICATED POOLS**

Outer 2" thread, Ø 50mm inner. For liner pools. Comes in ABS, with gaskets and screws. Installation with bushing 15662 or 15663 is recommended (see page 148).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00330	12	4.5	0.020
Beige	00330CL090	12	4.5	0.020
Light Grey	00330CL129	12	4.5	0.020
Anthracite Grey	00330CL144	12	4.5	0.020



17383



17383CL090



17383CL129



17383CL144

Complies with Standards
EN 16582-1
EN 16713-2**Multiflow return inlet nozzle****FOR LINER AND PREFABRICATED POOLS**

Range of inlets suitable for installation in public and private pools. Manufactured in ABS with UV treatment.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For prefabricated pools, Parker				
White	17383	24	4.5	0.020
Beige	17383CL090	24	4.5	0.020
Light Grey	17383CL129	24	4.5	0.020
Anthracite Grey	17383CL144	24	4.5	0.020



00334



00334CL090



00334CL129



00334CL144

Complies with Standards
EN 16582-1
EN 16713-2**Multiflow threaded return inlet nozzle****FOR LINER AND PREFABRICATED POOLS**

Outer 2" thread and Ø 50 mm inner wall to be glued. Made of ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00334	24	4.61	0.020
Beige	00334CL090	24	4.61	0.020
Light Grey	00334CL129	24	4.61	0.020
Anthracite Grey	00334CL144	24	4.61	0.020

ABS NOZZLES

Multiflow return inlet nozzles**Multiflow** threaded return inlet nozzle. Parker model. 

FOR LINER AND PREFABRICATED POOLS



2" external thread, Ø 50 mm inner wall with Parker system. (Self-tapping screws). For installation with wall conduits code 15664 or 15665 (see page 148).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	06498	20	4.72	0.021



Complies with Standards
EN 16582-1
EN 16713-2

**Multiflow** return inlet to be glued 

FOR CONCRETE POOLS

To be glued to a Ø 50 mm PN 10 pipe. Made of white ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard inlet	24413	40	4.0	0.020



Complies with Standards
EN 16582-1
EN 16713-2

**Multiflow** threaded return inlet nozzle 

FOR LINER AND PREFABRICATED POOLS

2" outer thread, 1½" inner thread. Made of white ABS. Comes with gaskets. The slots in the grille are no larger than 8 mm.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Standard inlet	06481	30	5.1	0.021



Complies with Standards
EN 16582-1
EN 16713-2

**Multiflow** return inlet nozzle for panel pools 

FOR LINER AND PREFABRICATED POOLS

Inlets specially designed for installation in panel pools between 10 and 15 cm thick. To be glued to a Ø 50 mm pipe. Made of white ABS. Comes with gaskets.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	33091	8	3.35	0.021



Complies with Standards
EN 16582-1
EN 16713-2

ABS NOZZLES

Multiflow return inlet nozzles

**Multiflow** return inlet nozzle for prefabricated pools

FOR LINER AND PREFABRICATED POOLS



Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00338	18 u	5.7	0.021

ABS NOZZLES

Return inlet nozzles

**Return inlet nozzle**
for prefabricated pools with liner

FOR LINER AND PREFABRICATED POOLS



The diameter of the outer wall has a smaller diameter so that it fits better in curved walls.

Complies with Standards
EN 16582-1
EN 1673-2

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
32450	24	7.1	0.021

**Return inlet nozzle**
with Ø 20 mm ball to be glued

FOR CONCRETE POOLS



Manufactured in white ABS. To be glued to a Ø 50 mm PN 10 pipe.

Complies with Standards
EN 16582-1
EN 1673-2

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
33501	50	2.9	0.020

ABS NOZZLES

Pool floor nozzles



3" adjustable return inlet nozzle for pool floor



DESCRIPTION

Made of white ABS plastic. Suction. For liner and prefabricated pools comes with gaskets, flanges and screws. Flow rate adjusted by turning the grille. Suction surface area: 0.015 m². Outer Ø 295 mm wall. Flow rate (0.4 m/s) 20 m³/h. Max. recommended flow rate compliant with standard EN 13451-1: 26 m³/h (0.5 m/s.).



FOR CONCRETE POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in AISI-304 stainless steel	08317	2	2.65	0.047
Grille in white ABS	11796	2	2.65	0.047

FOR LINER AND PREFABRICATED POOLS



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in AISI-304 Stainless Steel	08316	2	2.65	0.047
Grille in white ABS	11795	2	2.65	0.047



Pool floor nozzle



FOR CONCRETE POOLS



Outer 2" thread, int. Ø 50 mm	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00303	24	5.0	0.020
Beige	00303CL090	24	5.0	0.020
Light Grey	00303CL129	24	5.0	0.020
Anthracite Grey	00303CL144	24	5.0	0.020
To glue onto Ø 63 mm PN 6, inner Ø 50 mm	20140	20	4.4	0.021



Complies with Standards
EN 16582-1
EN 16713-2

ABS NOZZLES

Pool floor nozzles



00340

00340CL090

00340CL129

00340CL144

Complies with Standards
EN 16582-1
EN 16713-2

FOR LINER AND PREFABRICATED POOLS



Return nozzle. Comes with gaskets, flanges and screws. Adjustable flow rate. Max. flow rate: 12 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
2" outer thread and internal Ø 50 mm				
White	00340	12	5.4	0.020
Beige	00340CL090	12	5.4	0.020
Light Grey	00340CL129	12	5.4	0.020
Anthracite Grey	00340CL144	12	5.4	0.020
To be glued Ø 63 mm PN 6 outer wall, Ø 50 mm inner				
White	20139	12	5.4	0.021



22353

22353CL090

22353CL129

22353CL144

Complies with Standards
EN 16582-1
EN 16713-2

Pool floor nozzle with swivel joint



FOR CONCRETE POOLS

Swivel body in PVC. Cover in ABS. Adjuster screw in POM. Maximum flow rate of 10 m³/h. Fits to Ø 75 mm piping and wall conduit with code number 21248.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White				
White	22353	24	4.1	0.022
Beige	22353CL090	24	4.1	0.022
Light Grey	22353CL129	24	4.1	0.022
Anthracite Grey	22353CL144	24	4.1	0.022



BCN03 pool floor nozzle



FOR LINER AND PREFABRICATED POOLS

Adjustable pool floor return inlet for liner pools. Designed to be glued to the inside of PN6 and PN10 piping. Made of white ABS, with self-tapping screws or with metal inserts. Plastic or stainless steel flange, depending on the model. Maximum flow rate: 9.5 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
PN6, with self-screw	28230	12	3.25	0.031
PN6, with inserts	28231	12	3.55	0.031
PN10, with inserts and stainless steel flange	28502	12	4.54	0.031

Complies with Standards
EN 16582-1
EN 16713-2

ABS NOZZLES

Pool floor nozzles



BCN03 adjustable pool floor nozzle



FOR LINER AND PREFABRICATED POOLS



Pool floor return inlet for liner pools. Thanks to the adjustable feature, its installation in the pool floor is made extremely easy as it can be fitted after the concrete has been laid with wall conduit 43590.



Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With plastic flange inserts	43586	12	2.04	0.033
Plastic self-tapping flange	43587	12	2.04	0.033
With stainless steel flange inserts	43588	12	2.04	0.033
Self-tapping stainless steel flange	43589	12	2.04	0.033

ABS NOZZLES

Nozzles for high flow rates



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet/suction nozzle for high flow rates



FOR CONCRETE POOLS



Return inlet for large flow rates that can also be used as a suction nozzle. Maximum return flow rate of 30m³/h for a maximum flow rate speed of 4 m/s. Maximum suction flow rate of 5 m³/h for a maximum flow rate speed of 0.5 m/s. PVC body. Connection for Ø 75 or Ø 90mm pipe. Inlets can be installed into bushing 43590 (see page 139). Grille can be adjusted in any direction.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	41520	16	4.20	0.021



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet/suction nozzle for high flow rates



FOR LINER AND PREFABRICATED POOLS



Return inlet for large flow rates that can also be used as a suction nozzle. Maximum suction flow rate of 30m³/h for a maximum flow rate speed of 4 m/s. Maximum suction flow rate of 5 m³/h for a maximum flow rate speed of 0.5 m/s. PVC body. Connection for Ø 75 or Ø 90 mm pipe. Inlets can be installed into bushing 43590 (see page 139). Grille can be adjusted in any direction.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Panel pools	41518	10	5.50	0.021
Prefabricated pools	41521	12	4.20	0.021

ABS NOZZLES

Suction nozzles



Complies with Standards
EN 16582-1
EN 16713-2

Suction nozzle

ASTRALPOOL



FOR CONCRETE POOLS

To be glued to Ø 63 mm and Ø 50 mm piping. Maximum pressure: 6 bar. Made of ABS. 1½" thread.
Recommended for installation with wall conduits: code numbers 15661 and 15660.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Standard inlet - White	00300	24	3.62	0.020
Standard inlet - Beige	00300CL090	24	3.62	0.020
Standard inlet - Light Grey	00300CL129	24	3.62	0.020
Standard inlet - Anthracite Grey	00300CL144	24	3.62	0.020

Complies with Standards
EN 16582-1
EN 16713-2



Suction nozzle

ASTRALPOOL



FOR CONCRETE POOLS

Outer 2" thread, Ø 50 mm inner wall. Maximum pressure: 6 bar. Made of white ABS with 1½" threaded plug.
Recommended for installation with wall conduits (codes 15658 and 15659).

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Standard inlet - White	00301	24	3.8	0.020

Complies with Standards
EN 16582-1
EN 16713-2



Suction nozzle

ASTRALPOOL




FOR CONCRETE POOLS

To be glued to a Ø 50 PN 10 pipe. Made of white ABS with 1½" threaded plug. For end connector 07958 and push fit connector 01393. Recommended for installation with wall conduits (codes 15658 and 15659).

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Suction nozzle - White	24415	50	3.72	0.02

Complies with Standards
EN 16582-1
EN 16713-2

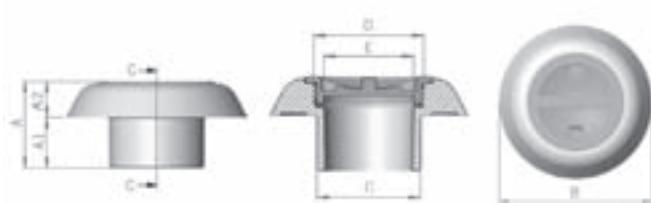

ABS NOZZLES

Suction nozzles



Complies with Standards
EN 16582-1
EN 16713-2

Suction nozzle

ASTRALPOOL A®



FOR LINER AND PREFABRICATED POOLS

2" outer thread, 1½" inner thread. Made of white ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Standard inlet	06484	30	4.3	0.021



Suction nozzle

ASTRALPOOL A®



FOR CONCRETE POOLS

To be glued to a Ø 63 mm pipe. Body and grille in ABS plastic, screws in stainless steel. Application on wall. Its characteristics make this nozzle particularly suitable for overflow channels. Maximum flow rate: 4.5 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	00302	12	3.1	0.016



Suction nozzle for prefabricated pools

ASTRALPOOL A®



FOR LINER AND PREFABRICATED POOLS

Outer 2" thread, internal Ø 50 mm. Made of white ABS. Comes with plug, gaskets and screws. Recommended for installation with wall conduit 15663.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Standard return inlet				
White	00332	12	4.22	0.020
Beige	00332CL090	12	5.4	0.020
Light Grey	00332CL129	12	5.4	0.020
Anthracite Grey	00332CL144	12	5.4	0.020



Complies with Standards
EN 16582-1
EN 16713-2

ABS NOZZLES

Suction nozzles



00336



00336CL129

00336CL090

00336CL144

Complies with Standards
EN 16582-1
EN 16713-2

FOR LINER AND PREFABRICATED POOLS



Outer 2" thread, Ø 50 mm inner wall. For prefabricated pools. Made of ABS. Comes with 1½" threaded plug.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White	00336	24	4.13	0.020
Beige	00336CL090	24	4.13	0.020
Light Grey	00336CL129	24	4.13	0.020
Anthracite Grey	00336CL144	24	4.13	0.020



17382

17382CL090



17382CL129

17382CL144

Complies with Standards
EN 16582-1
EN 16713-2

Suction nozzle for liner pools



FOR LINER AND PREFABRICATED POOLS

Made of ABS. Comes with gaskets, flanges and screws. Connections: outer 2" thread and Ø 50 mm inner.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
White	17382	20	6.0	0.020
Beige	17382CL090	20	6.0	0.020
Light Grey	17382CL129	20	6.0	0.020
Anthracite Grey	17382CL144	20	6.0	0.020



17382CL129

17382CL144

Complies with Standards
EN 16582-1
EN 16713-2

Suction nozzle for panel pools



FOR LINER AND PREFABRICATED POOLS

For installation in panel pools between 10 and 15 cm thick. Comes with gaskets. Connections: To be glued to Ø 50 mm piping and 1½" BSP thread.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	33092	8	3.35	0.021

Complies with Standards
EN 16582-1
EN 16713-2

ABS NOZZLES

Adjustable nozzles



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet nozzle

ASTRALPOOL 

FOR CONCRETE POOLS

In weatherproof, UV-resistant ABS. 3 adjustable positions. (100%, 65%, 35%). Maximum recommended flow rate compliant with standard EN 13451-1: 13.5 m³/h. Connection: outer Ø 63 mm wall.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	15863	24	3.4	0.020



Complies with Standards
EN 16582-1
EN 16713-2

Adjustable return inlet nozzle

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

Comes with gaskets, flange and screws. 3 adjustable positions: (100%, 65%, 35%). Flow rate: 13.5 m³/h. Outer Ø 63 mm connection.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	15864	12	4.2	0.02



Adjustable air impulsion inlet nozzle

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

For air distribution by means of the blowers. Maximum flow rate 18 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	49818	12	4.24	0.021

ABS NOZZLES


Lateral nozzles



FOR POLYESTER POOLS

Suction nozzle specially designed for polyester pools. Nozzle that should be installed in the wall of the pool in the deepest area of the pool. Installation with 2" thread, gasket and nut. Made of ABS. Flow rate : 6m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	74121	24	4.5	0.021
Beige	74121CL090	24	4.5	0.021
Light Grey	74121CL129	24	4.5	0.021
Anthracite grey	74121CL144	24	4.5	0.021



ABS NOZZLES

Hydromassage kits



FOR CONCRETE POOLS

Made up of a return inlet and wall conduit fitted with an air inlet and a venturi. Two wall conduit lengths available. Ø 50 mm water connection pipe and Ø 20 mm air suction pipe.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Hydromassage kit for concrete pools:				
Length of wall conduit 190 mm				
White	32113	12	3.5	0.021
Length of wall conduit 280 mm				
White	32370	12	3.6	0.021
Hydromassage kit for concrete pools with a liner:				
Length of wall conduit 190 mm				
White	31443	12	3.5	0.021
Length of wall conduit 275 mm				
White	32371	8	3.5	0.021



ABS NOZZLES

Hydromassage kits



Hydromassage kit

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS

Made up of a return inlet and wall conduit fitted with an air inlet and a venturi. Two wall conduit lengths available. Ø 50 mm water connection pipe and Ø 20 mm air suction pipe.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Hydromassage kit for prefabricated polyester pools:				
Length of wall conduit 190 mm				
White	32114	12	3.5	0.021
Length of wall conduit 275 mm				
White	32384	10	3.4	0.021
Hydromassage kit for prefabricated pools with liner:				
Length of wall conduit 190 mm				
White	32115	12	3.5	0.021
Length of wall conduit 275 mm				
White	32385	8	3.5	0.021



ABS NOZZLES

Accessories for ABS nozzles



Wall conduit for pool floor return inlet nozzle with swivel joint (Net'n'Clean reduction piping)

ASTRALPOOL 

DESCRIPTION

Diameter of the piping adjusted to glue in inlet 22353. Connection to piping for Ø 50 mm inner wall and Ø 63 mm outer wall.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	21248	12	7.3	0.032

Accessories for ABS nozzles



Ø 90 mm wall conduit



DESCRIPTION

PVC wall conduit. Cutting area of 120 mm for fitting it to the pool wall or floor. Ø 63 or Ø 75 connection, as required.

For inlets:

BCN 03: 43586 - 43587 - 43588 - 43589

Return inlet/suction nozzle for high flow rates: 41518 - 41520 - 41521

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Ø 90/Ø 63-Ø 75 mm wall conduit	43590	9	7.3	0.033



Double gasket kit



FOR LINER AND PREFABRICATED POOLS



Kit made up of a double gasket and the screws necessary for the installation of nozzles in panel pools. Made of TPE, the kit enables the installation of various accessories in pool shells and protects the panelling from coming into contact with water. Easy to install. Prevents corrosion of the panelling in the area that has been die cut.

We recommend to place this Kit on panel pools of metal sheet in nozzles 00330; 00332; 17382; 17383 and 56499.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Inserts for nozzles	43455-0500	80	-	0.035

STAINLESS STEEL NOZZLES

STYLE nozzles



Complies with Standards
EN 16582-1 EN 16713-2
EN 16713-3

STYLE return inlet nozzle



FOR CONCRETE POOLS

Range of return inlet nozzles manufactured in full SS AISI-316L suitable with concrete and prefabricated pools (together with liner kit).


These inlet nozzles can be installed in any bushing with 1-1/2" BSP thread.

Compatible with the interchangeable equipment.


Recommended flow rate for a max of 4 m/s:

- Ø20 mm: 4.5 m³/h *According with EN standards if installed at a maximum of 500mm below pool water level
- Ø25 mm: 7 m³/h
- 4 x Ø7.8 mm: 2.9 m³/h


	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Round - Ball 20mm - L35mm	75164	1	0.325	0.001
Round - Ball 20mm - L50mm	75165	1	0.415	0.001
Round - Ball 25mm - L35mm	75166	1	0.295	0.001
Round - Ball 25mm - L50mm	75167	1	0.385	0.001
Round Ball 4 x 7.8mm - L35mm	75168	1	0.305	0.001
Round Ball 4 x 7.8mm - L50mm	75169	1	0.395	0.001
Square - Ball 20mm - L35mm	75170	1	0.325	0.001
Square - Ball 20mm - L50mm	75171	1	0.415	0.001
Square - Ball 25mm - L35mm	75172	1	0.295	0.001
Square - Ball 25mm - L50mm	75173	1	0.385	0.001
Square - Ball 4 x 7.8mm - L35mm	75174	1	0.305	0.001
Square - Ball 4 x 7.8mm - L50mm	75175	1	0.395	0.001




75164 (L35mm)




75166 (L35mm)




75168 (L35mm)



75170 (L35mm)



75172 (L35mm)



75174 (L35mm)

STAINLESS STEEL NOZZLES

STYLE nozzles



Complies with Standards
EN 16582-1
EN 16713-2

STYLE suction nozzle


FOR CONCRETE POOLS

Range of suction inlet nozzles manufactured in full SS AISI-316L suitable with concrete and prefabricated pools (together with liner kit). These inlet nozzles can be installed in any bushing with 1½" BSP thread. With cover.


Compatible with the interchangeable equipment.

Pushing-fit connection 05684 required (see page 388).

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Round - L35mm	75176	1	0.34	0.001
Square - L35mm	75177	1	0.35	0.001



75176



75177




STYLE liner adaptors


FOR LINER POOLS

For use only with nozzles with connection length 35mm.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Liner adaptor	75178	1	0.115	0.001
Liner adaptor for interchangeable	75179	1	0.120	0.001

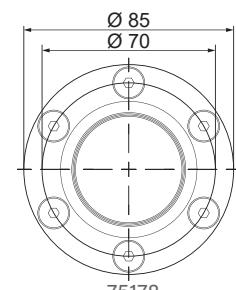

75178

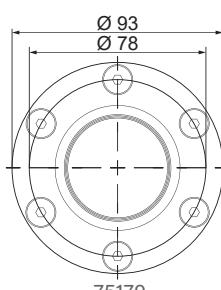

75179



Complies with Standards
EN 16582-1
EN 16713-2



OR

+



= LINER
APPLICATIONS

STAINLESS STEEL NOZZLES

Return inlet nozzles



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet nozzle with Ø 20 mm ball



FOR CONCRETE POOLS

1½" external thread. Manufactured in AISI-316L stainless steel. Maximum recommended flow of 4.5 m³/hour according to EN 16582-1 and EN 16713-2 standards if installed at a maximum of 500 mm below pool water level. Ø 20mm ball.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Length 35 mm	32994	1	0.3	0.001
Length 50 mm	16325	1	0.3	0.001
Length 70 mm	16326	1	0.5	0.001



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet nozzle
with Ø20 ball for liner pool

FOR LINER AND PREFABRICATED POOLS

1½" external thread. Manufactured in AISI-316L stainless steel. Ø 20 mm ball. Comes with gaskets and screws. Maximum recommended flow of 4.5 m³/hour according to EN 16582-1 and EN16713-2 standards if installed at a maximum of 500 mm below pool water level.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	16327	1	0.5	0.001



Complies with Standards
EN 16582-1
EN 16713-2

Brushing return inlet nozzle
with Ø20 ball for liner pool

FOR LINER AND PREFABRICATED POOLS

Manufactured in AISI-316L stainless steel. Fits to 00344 and 00345 bushings and adapts to converter 26171. Comes with gaskets and screws. Install at a maximum of 500 mm below water level. Ball fitted using screws. Recommended flow rate: 4.5 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	16331	1	0.3	0.001

STAINLESS STEEL NOZZLES

Return inlet nozzles



Return inlet nozzle with Ø 25 mm ball



FOR CONCRETE POOLS

1½" external thread. Manufactured in AISI-316L stainless steel. Maximum recommended flow according to EN 13451-3 standard: 7 m³/h. Ø 25 mm ball.



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
Length 35 mm	69874	1	0.3	0.001
Length 50 mm	69875	1	0.3	0.001
Length 70 mm	69876	1	0.5	0.001



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

Return inlet nozzle
with Ø25 ball for liner pool

FOR LINER AND PREFABRICATED POOLS

1½" external thread. Manufactured in AISI-316L stainless steel. Ø 25 mm ball. Comes with gaskets and screws. Recommended flow rate: 7 m³/h.



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	69877	1	0.5	0.001



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

Bushing return inlet nozzle
with Ø25 ball for liner pool

FOR LINER AND PREFABRICATED POOLS

Manufactured in AISI-316L stainless steel. Fits to 00344 and 00345 bushings and adapts to converter 26171. Comes with gaskets and screws. Ball fitted using screws. Recommended flow rate: 7 m³/h.



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	69878	1	0.3	0.001



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

STAINLESS STEEL NOZZLES

Adjustable nozzles



Adjustable return inlet nozzle



FOR CONCRETE POOLS

Manufactured in chrome-plated brass. Grille in AISI-304L stainless steel.

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Max. flow rate: 21 m ³ /h 2" inner thread	00312	12	7.0	0.013
Max. flow rate: 40 m ³ /h 3" inner thread	00313	6	10.0	0.014



Adjustable pool floor return inlet nozzle



DESCRIPTION

2" external thread. Made of AISI-316L stainless steel. Can be fitted in concrete and prefabricated pools. The water flow can be adjusted by loosening or tightening the central screw. Max. recommended flow rate compliant with standard EN 13451-3: 14 m³/h.Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	15839	1	0.9	0.002

STAINLESS STEEL NOZZLES

Suction nozzles



Suction nozzle



FOR CONCRETE POOLS

1½" external thread. Manufactured in AISI-316L stainless steel. Push-fit connection 05684 required (see page 388).

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Length 50 mm	16328	1	0.2	0.001
Length with cover: 50 mm	21644	1	0.3	0.001



Suction nozzle with sliding cover



FOR CONCRETE POOLS

Manufactured in chrome-plated brass. Faceplate in AISI-304L stainless steel. Pressure connection, 2" internal thread. Sleeve 01392 is needed (see page 388). couples to hose.

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00315	12	8.0	0.008

STAINLESS STEEL NOZZLES

Suction nozzles

**Suction nozzle** with threaded cover

ASTRALPOOL A



FOR CONCRETE POOLS

Made of chrome plated brass. Screws into 2" inner thread (01395 coupling is required for hose).

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00317	12	10.0	0.012

**Suction nozzle** for liner pools

ASTRALPOOL A



FOR LINER AND PREFABRICATED POOLS

In AISI-316L stainless steel. Comes with sealing gaskets, flange and screws. With 1½" outer thread. Push-fit connection 06584 is needed.

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
16330	1	0.5	0.001

STAINLESS STEEL NOZZLES

Adapter

**Adapter for pool wall conduits**

ASTRALPOOL A

Complies with Standard
EN 13451-1-3Complies with Standards
EN 16582-1
EN 16713-2

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
26171	1	0.2	0.001

STAINLESS STEEL NOZZLES

Stainless Steel nozzles accessories



69172



74525

Embellisher for inlets in stainless steel

DESCRIPTION



AISI-316L embellishers for ABS inlets. Includes flange, screws and gaskets.

Compatible with:	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
ABS return inlet items 00330 and 56499	69171	1	0.31	0.001
ABS suction inlet item 00332	69172	1	0.41	0.001
ABS return inlet code 56499 and 00330	74525	1	0.38	0.001

CONNECTION BOXES

Connection boxes



75971

75971CL090



75971CL129

75971CL144

UNIK connection box

DESCRIPTION

Manufactured in ABS, with a cover designed to be integrated in the pool surroundings.

Compatible to install in a Ø50 tube or hose.

The connection system is M-25 on the inside, which allows to manipulate it after its installation. The internal connection is with a M-25 cable gland and the external connection is 3/4 BSP.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	75971	8	4.65	0.030
Beige	75971CL090	8	4.65	0.030
Light Grey	75971CL129	8	4.65	0.030
Anthracite	75971CL144	8	4.65	0.030



75972

75972CL090



75972CL129

75972CL144

Connection box

DESCRIPTION

Manufactured in ABS.

Compatible to install in a Ø50 tube or hose.

The connection system is M-25 on the inside, which allows to manipulate it after its installation. The internal connection is with a M-25 cable gland and the external connection is 3/4 BSP.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	75972	8	3.8	0.030
Beige	75972CL090	8	3.8	0.030
Light Grey	75972CL129	8	3.8	0.030
Anthracite	75972CL144	8	3.8	0.030

Interchangeable pool basin equipment

Interchangeable pool basin equipment

ASTRALPOOL A

FOR LINER AND PREFABRICATED POOLS



Bushing, return inlet, suction nozzle, flange assembly to be installed in concrete, prefabricated and liner pools. The measurements of each item make it possible to interchange them with the stainless steel sets. The inlets can be installed in any bushing with a 1½" BSP thread. There is a flange set to install the inlets in pools with a liner. All items mainly made in plastic (ABS), except screws and gaskets. Each item can be assembled with the stainless steel sets. Interchangeable stainless steel/plastic codes.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
S. S. interchangeable return inlet	49758	1	0.33	0.021
ABS interchangeable return inlet				
White	49754	50 u	4.84	0.021
Beige	49754CL090	50 u	4.84	0.021
Light grey	49754CL129	50 u	4.84	0.021
Anthracite grey	49754CL144	50 u	4.84	0.021
ABS interchangeable return inlet circular vent	52681	50	4.84	0.021
Stainless Steel interchangeable suction nozzle	49759	1	0.16	0.021
Kit Base and nut - Connection to the base Ø50 mm, 2 "nut	74179	24 u	4.61	0.021
ABS interchangeable suction nozzle				
White	72672	50 u	4.84	0.021
Beige	72672CL090	50 u	4.84	0.021
Light grey	72672CL129	50 u	4.84	0.021
Anthracite grey	72672CL144	50 u	4.84	0.021
S. S. interchangeable flange inlet set	49760	1	0.16	0.021
ABS interchangeable flange inlet set	49756	50 u	4.84	0.021
Interchangeable bushing inlet set S. S. for threading	49761	1	0.70	0.021
Interchangeable bushing inlet set ABS for threading	49757	9	2.93	0.021
Interchangeable bushing inlet set ABS for gluing	49832	9	2.93	0.021

		Return nozzle	Suction nozzle	Flange	Wall conduits
Stainless Steel	-	49758	49759	49760	49761
ABS	74179	49754 52681*	72672	49756	49757 49832**

* Circular vent ** To glue

WALL BUSHINGS

ABS wall bushings



Wall conduits in ABS

ASTRALPOOL 

FOR CONCRETE POOLS

Range of 300 mm long conduits for Ø 2" inlets and Multiflow that can be cut to different lengths, depending on the thickness of the pool wall. Made of ABS. The ribs of the end plates have holes for fitting the wall conduit to the pool structure, which makes assembly straightforward.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Wall conduit in ABS with 2" rear male thread and Ø 50 mm smooth inner wall				
2" front female thread nozzles	15658	15	4.3	0.040
Smooth Ø 59.3 mm front connection for nozzles to be glued to Ø 63 mm piping, 6-bar piping and MINI projector (33684)	15661	15	4.2	0.040
Wall conduit in ABS with smooth Ø 63 mm rear connection and smooth Ø 50 mm inner wall				
2" front female thread nozzles	15659	15	4.2	0.040
Smooth Ø 59.3 mm front connection for nozzles to be glued to Ø 63 mm piping, 6-bar piping and MINI projector (33684)	15660	15	5.6	0.040



Wall conduits in ABS

ASTRALPOOL 

FOR LINER AND PREFABRICATED POOLS



Range of 300 mm long conduits for Ø 2" inlets and Multiflow that can be cut to different lengths, depending on the thickness of the pool wall. Made of ABS. The ribs of the end plates have holes for fitting the wall conduit to the pool structure, which makes assembly straightforward. The inlet's end plate ensures that it fits flush to the pool wall so that the liner remains flat against the wall and does not swell. This system is aesthetically pleasing as only the face plate can be seen.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Wall conduit with 2" rear male thread and Ø 50 mm smooth inner wall				
2" front female thread for nozzles with 2" male thread	15663	12	4.0	0.040
2" front female thread for nozzle with code number 06498 only	15664	14	4.2	0.040
Wall conduit with smooth Ø 63 mm rear connection and smooth Ø 50 mm inner wall				
2" front female thread for nozzles with 2" male thread	15662	12	5.0	0.040
2" front female thread for nozzle 06498 only	15665	14	5.4	0.040

WALL BUSHINGS

PVC wall bushings



Wall conduits in PVC

ASTRALPOOL A

FOR ALL TYPES OF POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Wall conduit in Grey PVC. 150 mm long				
2" outer thread + Ø 50 mm inner, 2" inner thread	00322	40	8.2	0.040
Wall conduit in Grey PVC. 300 mm long				
2" female and male thread connection	00323	20	8.9	0.040
2" rear male thread pipe connection or smooth inner wall for MINI projector (33684)	00324	20	8.5	0.040
2" outer thread + Ø 50 mm inner, 1½" inner thread	00325	20	8.4	0.040
2" outer thread + Ø 50 mm inner wall, Ø 50 mm inner wall specially for nozzles 00289, 07957, 00304, 00305 and 00306	00326	20	8.4	0.040

WALL BUSHINGS

Stainless Steel wall bushings



Wall conduits in Stainless Steel

ASTRALPOOL A

FOR CONCRETE POOLS



Wall conduit in AISI-304L S.S. Both ends with 1½" inner thread. With earth connection.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Length 240 mm	00327	1	0.7	0.003
Length 340 mm	00328	1	0.8	0.005



Wall conduits in Stainless Steel

ASTRALPOOL A

FOR LINER AND PREFABRICATED POOLS



Made in stainless steel. AISI-304L. Both ends have a 1½" female thread. With an equipotential outlet. For inlet 16331 (see page 143).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Length 240 mm	00344	1	0.7	0.003
Length 340 mm	00345	1	0.9	0.005

Pool shell equipment packs

DESCRIPTION

Pack made up of: 2 skimmers, 3 multiflow return inlets, 1 suction nozzle, 1 round main drain.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Pack for concrete pools	74349	1	5.20	0.074
Pack for liner pools	74350	1	10.78	0.158

Pack for concrete pools

Contains the following products:



00249 x 2

56379 x 1

24413 x 3

24415 x 1

Pack for liner pools

Contains the following products:



01464 x 2

56382 x 1

00330 x 3

00332 x 1



ACCESSORIES

Winter accessories

Winter plugs




FOR ALL TYPES OF POOLS

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For protect from freezing	53849	-	-	-
For covering 1½" inlets	06212	-	-	-
For covering 2" inlets				


Installation diagrams

INSTALLATION DIAGRAMS


Skimmer installation

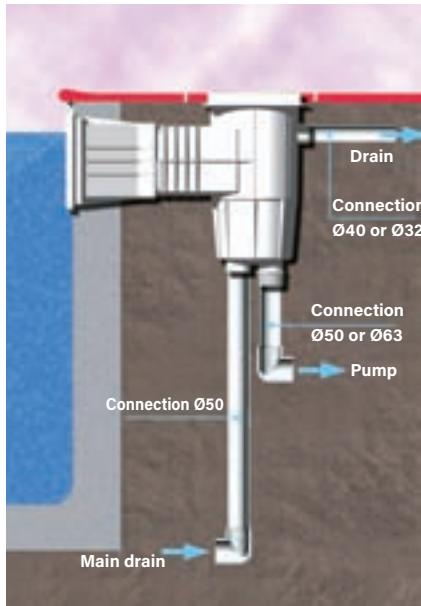


Water level regulator installation

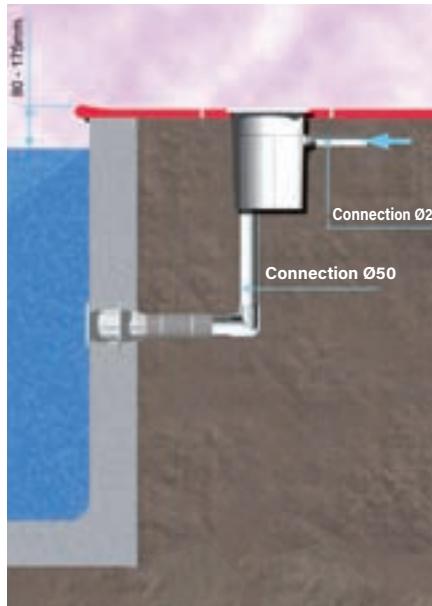


Main drain installation

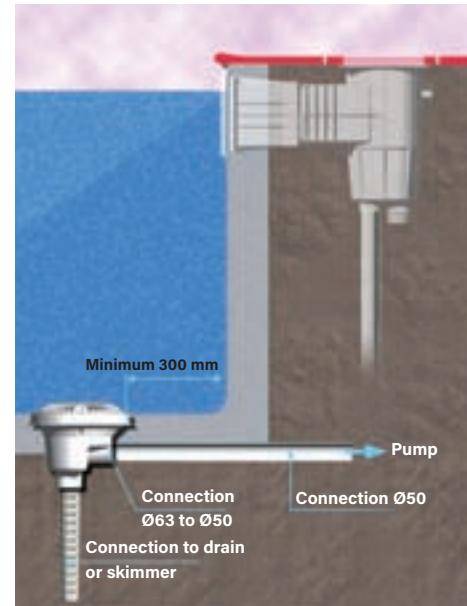


Nozzle installation

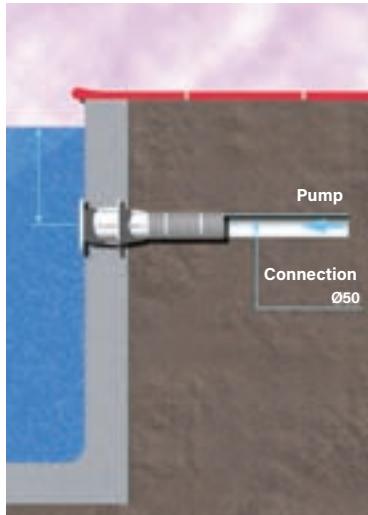

Underwater installation

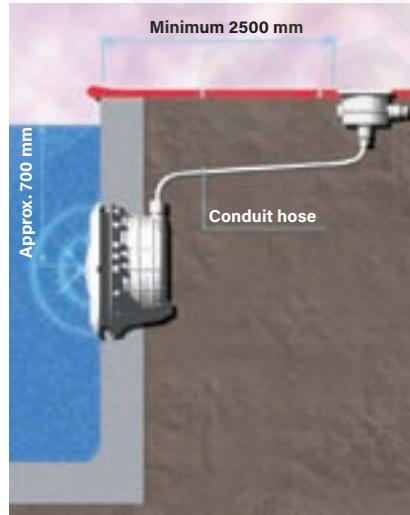

Net'n'Clean valve installation

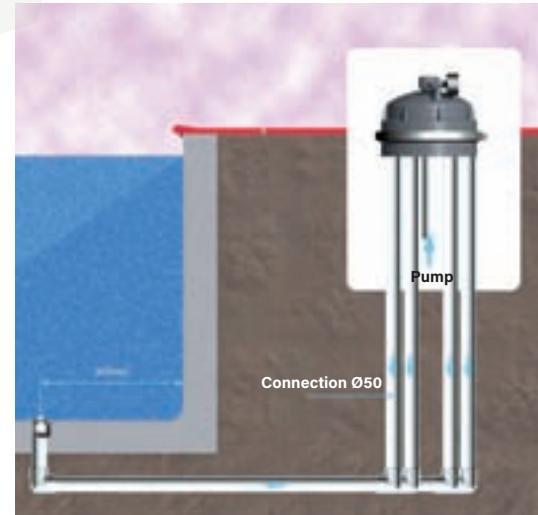


Installation diagrams

INSTALLATION DIAGRAMS

CONCRETE POOLS:

Concrete / liner

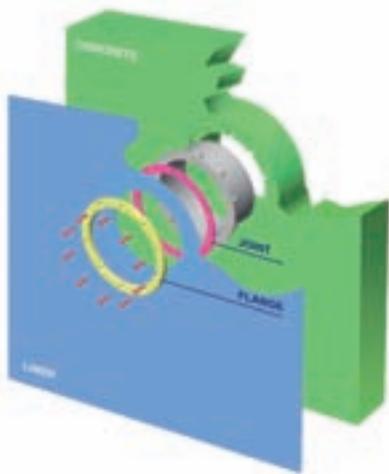

Concrete




FIBREGLASS POOLS:

Fibreglass




Threaded fibreglass

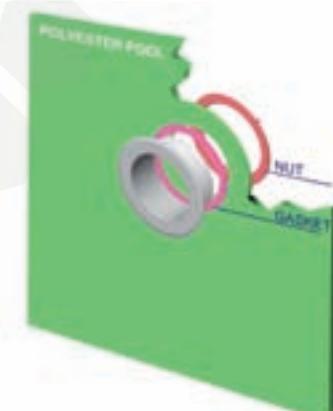


PANEL POOLS:

1 gasket

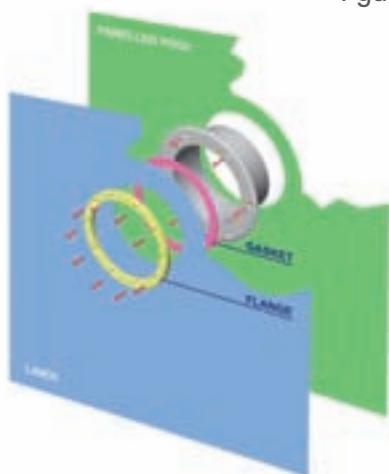

2 gaskets

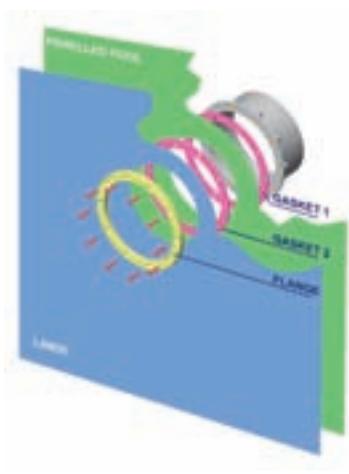

COMMERCIAL SOLUTIONS

POOL SHELL EQUIPMENT

82 CONCRETE POOL

- 82 Main drains
- 85 Main drain accessories
- 86 Main drain grilles
- 87 ABS Inlets
- 89 Stainless Steel Inlets

90 LINER AND PREFABRICATED POOL

- 92 Main drains
- 93 Main drain accessories
- 93 Main drain grilles
- 94 ABS Inlets
- 96 Stainless Steel Inlets

ASTRALPOOL 



ALBA
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner
www.alba.com.mv

POOL MAIN DRAINS INFORMATION

How affects UNE-EN 13451-3:2012+A3:2016 main drains in commercial pools

NEW POOL

POOL RENOVATION

Suction rate: insure a maximum of 0.5 m/s paragraph 4.6.1

RISK OF ENTRAPMENT

How to prevent it?

ANTI-VORTEX COVER	NON ANTI-VORTEX COVER	WITH MAIN DRAIN BODY CHANGE	UNCHANGED MAIN DRAIN BODY
<p>Number of main drains per pool: 1</p> <p>According to paragraph 4.6.1b (1, 2 and 3)</p>	<p>Number of main drains per pool: 2 balanced main drains, distanced at minimum 2 meters. And if any of the 2 main drain is blocked the remaining one should be able to absorb 100% of the installation flow. According to paragraph 4.6.1a (1, 2 and 3)</p>	<p>Applies new pool rules</p>	<p>Install an anti-vortex grille on pre-installed main drain</p> <p>According to paragraph 4.6.1b (1, 2 and 3)</p> <p>or one or more additional main drain shall be installed as paragraph 4.6.1a (1, 2 and 3)</p>

Another possibility is to install a compensating tank.

CAVITY DIMENSION

Main drain should respect a certain cavity dimensions according to a mathematical rule.

In addition to the main drain requirements a vacuum system may be provided.

OTHERS

Other requisites are considered to define that a main drain is compliant with EN, like design.
e.g. the design of the grill to avoid human body parts or hair entrapment.

**Only with the fulfillment of all requisites of the standard,
a Compliance Certification can be delivered!**

*Anti-vortex plate is a special component installed in the suction line to control the turbulence in a flowing fluid. These plates allows to control the velocity of the fluid thus preventing cavitation in the fluid according to UNE-EN 13451-3.

CONCRETE POOL **MAIN DRAINS**

- All main drains in the range are supplied with UV protection.
- To prevent the risk of suction, install the main drains according to local regulations.
- Recommended use: Maximum suction rate of 0.5 m/s.
- Install at least 2 main drains, each with a suction capacity able to handle the pool's full flow rate.

NORM MAIN DRAIN



Range of main drains suitable for public and private swimming pools. Supplied with flat or antivortex grilles. Manufactured in ABS with UV treatment, fitted with a 2" side outlet and a 1½" bottom outlet connection, bottom outlet covered by semi-die cut tab.



Also available in other
colours




56379 complies with de
standard EN 13451-3



Complies with Standards
EN 16582-1

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Flat grating				
White	56378	4	10.60	0.069
Beige	56378CL090	4	10.60	0.069
Light Grey	56378CL120	4	10.60	0.069

Antivortex grating					
White		56379	4	10.60	0.069
Beige		56379CL090	4	10.60	0.069
Light Grey		56379CL129	4	10.60	0.069
Anthracite Grey		56379CL144	4	10.60	0.069

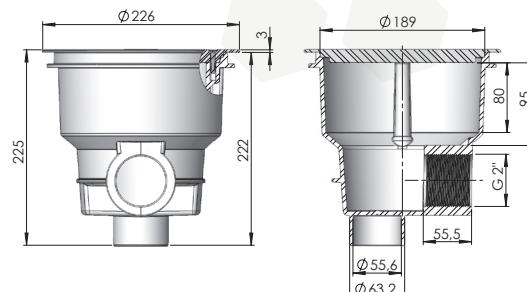

MAIN DRAIN WITH SQUARE COVER




in stainless steel, 2" outlet

2" side outlet. Manufactured in stainless steel. AISI-316. Antivortex lid. Can be used in concrete and prefabricated pools with a 00276 adapter. Maximum flow rate: 6 m³/h.



Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00269	1	114	0,01

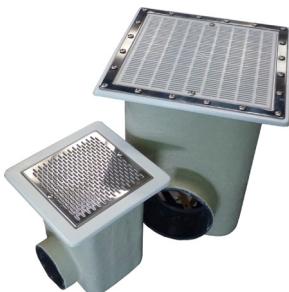CONCRETE POOL
MAIN DRAINSComplies with Standard
EN 13451-1/3 2012

NORM MAIN DRAIN

in polyester and fibreglass - 330 mm x 330 mm



Range of main drains manufactured in polyester resin and fibreglass. Grille in stainless steel AISI-316L. Optional hydrostatic valve. Minimum depth of installation: 1.5 m. Maximum recommended flow rate down drain: 103 m³/h (0.5 m/s).

Outlet connection to be glued	Flow rate	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Ø 75 mm	15 m ³ /h	20282N	1	8	0.08
Ø 90 mm	23 m ³ /h	20283N	1	9	0.08
Ø 110 mm	27 m ³ /h	20284N	1	10	0.08



MAIN DRAIN

in polyester and fibreglass - 330 mm x 330 mm



With a gelcoat finish. With optional hydrostatic valve. Maximum recommended flow rate in accordance with standard EN 13451-1.

Grille in stainless steel AISI-316L. Holes < 8 mm	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Ø 75 mm	16 m ³ /h	20282	1	5
Ø 90 mm	22 m ³ /h	20283	1	5
Ø 110 mm	33 m ³ /h	20284	1	5



Optional standard
American size and
antivortex in standard
American size

Grille in ABS plastic with
protection against UV rays.Outlet connection
to be glued Flow rate

Ø 75 mm	16 m ³ /h	22359	1	4.5	0.034
Ø 90 mm	22 m ³ /h	22360	1	4.5	0.034
Ø 110 mm	33 m ³ /h	22361	1	4.5	0.034
Ø 125 mm	43 m ³ /h	22362	1	4.5	0.034

Complies with Standard
EN 13451-1/3 2012

NORM MAIN DRAIN

in polyester and fibreglass - 507 mm x 507 mm



Range of drains manufactured in polyester resin and fibreglass. Grille in AISI-316L stainless steel. Optional hydrostatic valve. Minimum depth of installation: 1.5 m. Maximum recommended flow rate down drain: 103 m³/h (0.5 m/s).

Outlet connection to be glued	Flow rate	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Ø 110 mm	42 m ³ /h	20285N	1	16	0.23
Ø 125 mm	51 m ³ /h	20286N	1	17	0.23
Ø 140 mm	66 m ³ /h	20287N	1	18	0.23
Ø 160 mm	95 m ³ /h	20288N	1	19	0.23
Ø 200 mm	103 m ³ /h	20289N	1	20	0.23

Optional standard
American size

CONCRETE POOL

MAIN DRAINS

MAIN DRAIN

in polyester and fibreglass - 507 mm x 507 mm



With a gelcoat finish. With optional hydrostatic valve. Maximum recommended flow rate in accordance with standard EN 13451-1.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------

**Grille in AISI-316L stainless steel.
Holes < 8 mm**

**Outlet connection Flow rate
to be glued**

Ø 110 mm	33 m ³ /h	20285	1	11.5	0.132
Ø 125 mm	43 m ³ /h	20286	1	11.5	0.132
Ø 140 mm	54 m ³ /h	20287	1	11.5	0.132
Ø 160 mm	70 m ³ /h	20288	1	11.5	0.132
Ø 200 mm	100 m ³ /h	20289	1	11.5	0.132



**Grille in ABS plastic with
protection against UV rays.**

**Outlet connection Flow rate
to be glued**

Ø 110 mm	33 m ³ /h	28709	1	11.5	0.132
Ø 125 mm	43 m ³ /h	28710	1	11.5	0.132
Ø 140 mm	54 m ³ /h	28711	1	11.5	0.132
Ø 160 mm	70 m ³ /h	28712	1	11.5	0.132
Ø 200 mm	100 m ³ /h	28713	1	11.5	0.132

CONCRETE POOL
MAIN DRAIN ACCESSORIES

HYDROSTATIC VALVE



To alleviate the pressure that can build up under the pool shell due to groundwater, it is recommended that a hydrostatic valve and a drainage pipe be fitted to the main drain. Hydrostatic valve to be fitted to the 2" bottom outlet on main drains. Made of white ABS, with stainless steel screw and spring, 1½" male thread.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	00277	50	2.63	0.01



DRAINAGE PIPE



Drainage pipe with 1½" BSP thread connection for main drains with code numbers 01466, 27837 and 27839. Made of ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	21581	24	3.54	0.021





CONCRETE POOL
MAIN DRAIN GRILLES

FLUSH-FIT ANTIVORTEX COVER

ASTRALPOOL

Special flush-fit design that enables pool cleaners to go over it without blocking it up. Smooth slopes.

The 415 mm x 415 mm cover (25344) can be fitted to the following main drains:

With stainless steel grille:

- 20282
- 20283
- 20284

With plastic grille:

- 22359
- 22360
- 22361
- 22362

The 570 mm x 570 mm cover (28556) can be fitted to the following main drains:

With stainless steel grille:

- 20285
- 20286
- 20287
- 20288

With plastic grille:

- 28709
- 28710
- 28711
- 28712



Complies with Standard
EN 13451-1-3

415 mm x 415 mm, Height: 70 mm
570 mm x 570 mm, Height: 60 mm

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
415 mm x 415 mm, Height: 70 mm	25344	1	2.25	0.012
570 mm x 570 mm, Height: 60 mm	28556	1	4.00	0.032



DRAIN GRILLE in stainless steel

ASTRALPOOL

Designed for concrete pools. Support frame and grille in polished stainless steel. Supplied with fixing screws. Other sizes can be made to order.



Complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16713-2

AISI-304

Size (mm) Max. recommended flow rate

200 x 200	15 m ³ /h (0.5 m/s)	00284	1	1.2	0.01
300 x 300	43 m ³ /h (0.5 m/s)	00285	1	2.2	0.01
400 x 400	83 m ³ /h (0.5 m/s)	00286	1	4.0	0.03
500 x 500	136 m ³ /h (0.5 m/s)	00287	1	4.5	0.04

AISI-316

Size (mm) Max. recommended flow rate

200 x 200	15 m ³ /h (0.5 m/s)	30764	1	1.2	0.01
300 x 300	43 m ³ /h (0.5 m/s)	30765	1	2.2	0.01
400 x 400	83 m ³ /h (0.5 m/s)	30766	1	4.0	0.03
500 x 500	136 m ³ /h (0.5 m/s)	30767	1	4.5	0.04

CONCRETE POOL

ABS INLETS



Complies with Standards
EN 16582-1
EN 16713-2

RETURN INLET/SUCTION NOZZLE

for high flow rates



Return inlet for large flow rates that can also be used as a suction nozzle. Maximum suction flow rate of 30m³/h for a maximum flow rate speed of 4 m/s. Maximum suction flow rate of 5 m³/h for a maximum flow rate speed of 0.5 m/s. PVC body. Connection for Ø 75 or Ø 90mm pipe. Inlets can be installed into bushing 43590. Grille can be adjusted in any direction.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Return inlet/suction nozzle for large flows and concrete pools	41520	16	4.20	0.021




Complies with Standards
EN 16582-1
EN 16713-2

NORM RETURN INLETS



Range of inlets suitable for installation in public and private pools. Manufactured in white ABS with UV treatment.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
NORM return inlet for concrete pools	56498	24	4.5	0.020

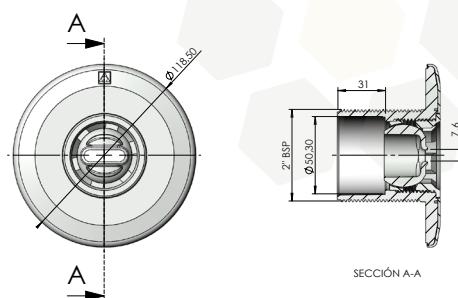

SECCIÓN A-A

POOL FLOOR RETURN INLET



00303



00303CL090



00303CL129



00303CL144



Complies with Standards
EN 16582-1
EN 16713-2

Outer 2" thread, int. Ø 50 mm

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00303	24	5.0	0.020
Beige	00303CL090	24	5.0	0.020
Light Grey	00303CL129	24	5.0	0.020
Anthracite Grey	00303CL144	24	5.0	0.020
To glue onto Ø 63 mm PN 6, inner Ø 50 mm	20140	20	4.4	0.021



3" ADJUSTABLE POOL FLOOR

return inlet



Made of white ABS plastic. Suction. Flow rate adjusted by turning the grille. Suction surface area: 0.015 m². Outer Ø 295 mm wall. Flow rate (0.4 m/s) 20 m³/h. Max. recommended flow rate compliant with standard EN 13451-1: 26 m³/h (0.5 m/s.).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in AISI-304 stainless steel	08317	2	2.65	0.047
Grille in white ABS	11796	2	2.65	0.047



POOL FLOOR RETURN INLET

with swivel joint



Swivel body in PVC. Cover in ABS. Adjuster screw in POM. Maximum flow rate of 10 m³/h. Fits to Ø 75 mm piping and wall conduit with code number 21248.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	22353	24	4.1	0.022
Beige	22353CL090	24	4.1	0.022
Light Grey	22353CL129	24	4.1	0.022
Anthracite Grey	22353CL144	24	4.1	0.022



Complies with Standards
EN 16582-1
EN 16713-2



SUCTION INLET



To be glued to a Ø 63 mm pipe. Body and grille in ABS plastic, screws in stainless steel. Application on wall. Its characteristics make this nozzle particularly suitable for overflow channels. Maximum flow rate: 4.5 m³/h.

Code	Standard Pack	Standard weight in kg	Standard volume in m ³
00302	12	3.1	0.016

CONCRETE POOL
STAINLESS STEEL INLETS



ADJUSTABLE POOL FLOOR return inlet



2" external thread. Made of AISI-316L stainless steel. Can be fitted in concrete and prefabricated pools. The water flow can be adjusted by loosening or tightening the central screw. Max. recommended flow rate compliant with standard EN 13451-3: 14 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	15839	1	0.9	0.002

Complies with Standard
EN 13451-1-3

Complies with Standards
EN 16582-1
EN 16713-2



ADJUSTABLE RETURN INLET



Manufactured in chrome-plated brass. Grille in AISI-316L stainless steel.



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Max. flow rate: 21 m ³ /h 2" inner thread	00312	12	7.0	0.013
Max. flow rate: 40 m ³ /h 3" inner thread	00313	6	10.0	0.014

Complies with Standard
EN 13451-1-3

Complies with Standards
EN 16582-1
EN 16713-2





56382 and 56383
complies with Standard
EN 13451-1-3



Complies with Standards
EN 16582-1
EN 16732

- + All main drains in the range are supplied with UV protection.
- + To prevent the risk of suction, install the main drains according to local regulations.
- + Recommended use: Maximum suction rate of 0.5 m/s.
- + Install at least 2 main drains, each with a suction capacity able to handle the pool's full flow rate.

NORM MAIN DRAIN

ASTRALPOOL


Range of main drains suitable for installation in public and private pools. Supplied with flat or antivortex grilles. Manufactured in ABS with UV treatment, fitted with a 2" side outlet and a 1½" bottom outlet connection, bottom outlet covered by semi-die cut tab.



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Flat grating with inserts				
White	56380	4	10.60	0.069
Beige	56380CL090	4	10.60	0.069
Light Grey	56380CL129	4	10.60	0.069
Anthracite Grey	56380CL144	4	10.60	0.069
Flat grating without inserts				
White	56381	4	10.60	0.069
Beige	56381CL090	4	10.60	0.069
Light Grey	56381CL129	4	10.60	0.069
Anthracite Grey	56381CL144	4	10.60	0.069
Antivortex grating with inserts				
White	56382	4	10.60	0.069
Beige	56382CL090	4	10.60	0.069
Light Grey	56382CL129	4	10.60	0.069
Anthracite Grey	56382CL144	4	10.60	0.069
Antivortex grating without inserts				
White	56383	4	10.60	0.069
Beige	56383CL090	4	10.60	0.069
Light Grey	56383CL129	4	10.60	0.069
Anthracite Grey	56383CL144	4	10.60	0.069

LINER AND PREFABRICATED POOL

MAIN DRAINS

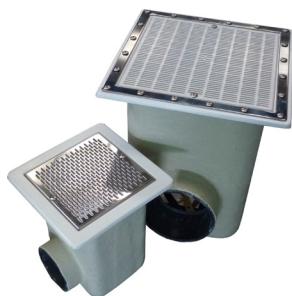

NORM MAIN DRAIN IN POLYESTER

and fibreglass - 350 mm x 350 mm




Range of main drains manufactured in polyester resin and fibreglass. Grille in stainless steel. Optional hydrostatic valve. Minimum depth of installation: 1.5 m. Maximum recommended flow rate down drain: 103 m³/h (0.5 m/s).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in stainless steel				
Outlet connection	Flow rate to be glued			
Ø 75 mm	15 m ³ /h	20074N	1	8
Ø 90 mm	23 m ³ /h	20075N	1	9
Ø 110 mm	27 m ³ /h	20290N	1	10

Complies with Standard
EN 13451-3

Complies with Standards
EN 16582-1

Optional standard
American size and
antivortex in standard
American size

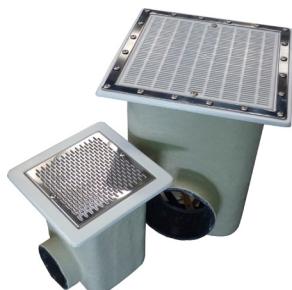

NORM MAIN DRAIN IN POLYESTER

and fibreglass - 507 mm x 507 mm



Range of main drains manufactured in polyester resin and fibreglass. Grille in stainless steel or plastic. Optional hydrostatic valve. Minimum depth of installation: 1.5 m. Maximum recommended flow rate down drain: 103 m³/h (0.5 m/s).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in stainless steel				
Outlet connection	Flow rate to be glued			
Ø 110 mm	42 m ³ /h	20076N	1	16
Ø 125 mm	51 m ³ /h	20077N	1	17
Ø 140 mm	66 m ³ /h	20078N	1	18
Ø 160 mm	95 m ³ /h	20079N	1	19
Ø 200 mm	103 m ³ /h	20291N	1	20

Complies with Standard
EN 13451-3

Optional standard
American size and
antivortex in standard
American size

Complies with Standards
EN 16582-1Optional:
Standard American sizes

MAIN DRAIN IN POLYESTER

and fibreglass - 350 mm x 350 mm

ASTRALPOOL

Made of fibreglass-reinforced polyester. With a gelcoat finish. Comes with gaskets, flange and screws. Holes < 8 mm. Outlet connection to be glued. With optional hydrostatic valve.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------

Grille in stainless steel**Outlet connection Flow rate
to be glued**

Ø 75 mm	16 m ³ /h	20074	1	6.5	0.047
Ø 90 mm	22 m ³ /h	20075	1	6.5	0.047
Ø 110 mm	33 m ³ /h	20290	1	6.5	0.047

Max. recommended flow rate: 33.5 m³/h (0.5 m/s). Recommended flow rate: 20 m³/h (0.3 m/s).

**Grille in ABS plastic with
protection against UV rays****Outlet connection Flow rate
to be glued**

Ø 75 mm	18 m ³ /h	22416	1	6.5	0.047
Ø 90 mm	27 m ³ /h	22417	1	6.5	0.047
Ø 110 mm	42 m ³ /h	22418	1	6.5	0.047
Ø 125 mm	45 m ³ /h	22419	1	6.5	0.047

Max. recommended flow rate: 45 m³/h (0.5 m/s). Recommended flow rate: 27 m³/h (0.3 m/s)



MAIN DRAIN IN POLYESTER

and fibreglass - 507 mm x 507 mm

ASTRALPOOL

With a gelcoat finish. Grille in AISI-316L stainless steel. Comes with gaskets, flanges and screws. Holes < 8 mm. Outlet connection to be glued. Recommended flow rate: 62 m³/h (0.3 m/s). Max. recommended flow rate: 103 m³/h (0.5 m/s.). With optional hydrostatic valve.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
--	------	---------------	-----------------------	-----------------------------------

Grille in stainless steel**Outlet connection Flow rate
to be glued**

Ø 110 mm	42 m ³ /h	20076	1	1.4	0.132
Ø 125 mm	51 m ³ /h	20077	1	1.4	0.132
Ø 140 mm	66 m ³ /h	20078	1	1.4	0.132
Ø 160 mm	95 m ³ /h	20079	1	1.4	0.132
Ø 200 mm	103 m ³ /h	20291	1	1.4	0.132

**Grille in ABS plastic with
protection against UV rays****Outlet connection Flow rate
to be glued**

Ø 110 mm	42 m ³ /h	28722	1	1.4	0.132
Ø 125 mm	51 m ³ /h	28723	1	1.4	0.132
Ø 140 mm	66 m ³ /h	28724	1	1.4	0.132
Ø 160 mm	95 m ³ /h	28725	1	1.4	0.132
Ø 200 mm	103 m ³ /h	28726	1	1.4	0.132

LINER AND PREFABRICATED POOL
MAIN DRAIN ACCESSORIES

HYDROSTATIC VALVE



To alleviate the pressure that can build up under the pool shell due to groundwater, it is recommended that a hydrostatic valve and a drainage pipe be fitted to the main drain. Hydrostatic valve to be fitted to the 2" bottom outlet on main drains. Made of white ABS, with stainless steel screw and spring, 1½" male thread.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	00277	50	2.63	0.01



DRAINAGE PIPE



Complies with Standards
EN 16582-1

Drainage pipe with 1½" BSP thread connection for main drains with code numbers 00270, 07880, 27838, 26197 and 27125. Made of ABS.

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
	21581	24	3.54	0.021

LINER AND PREFABRICATED POOL
MAIN DRAIN GRILLES

FLUSH-FIT ANTIVORTEX COVER



Special flush-fit design that enables pool cleaners to go over it without blocking it up.

The 415 mm x 415 mm cover (25344) can be fitted to the following main drains:

With stainless steel grille: With plastic grille:

-20074	-22416
-20075	-22417
-20290	-22418
	-22419



The 570 mm x 570 mm cover (28556) can be fitted to the following main drains:

With stainless steel grille: With plastic grille:

-20076	-28722
-20077	-28723
-20078	-28724
-20079	-28725

	Code	Standard Pack	Standard weight in kg	Standard volume in m³
415 mm x 415 mm, Height: 70 mm 570 mm x 570 mm, Height: 60 mm	25344 28556	1 1	2.25 3.90	0.012 0.015



Complies with Standard
EN 13451-1:2000



56499



56499CL090



56499CL129



56499CL144

NORM RETURN INLETS

ASTRALPOOL

Range of inlets suitable for installation in public and private pools. Manufactured in ABS with UV treatment.



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
For prefabricated/liner pools				
White	56499	12	4.5	0.020
Beige	56499CL090	12	4.5	0.020
Light Grey	56499CL129	12	4.5	0.020
Anthracite Grey	56499CL144	12	4.5	0.020
For prefabricated pools				
White	56500	24	4.5	0.020
Beige	56500CL090	24	4.5	0.020
Light Grey	56500CL129	24	4.5	0.020
Anthracite Grey	56500CL144	24	4.5	0.020



00340



00340CL090



00340CL129



00340CL144

POOL FLOOR RETURN INLET

for prefabricated pools

ASTRALPOOL

Return nozzle. Comes with gaskets, flanges and screws. Adjustable flow rate. Max. flow rate: 12 m³/h.

**2" outer thread and internal Ø 50 mm****To be glued Ø 63 mm
PN 6 outer wall, Ø 50 mm inner**

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
White	00340	12	5.4	0.020
Beige	00340CL090	12	5.4	0.020
Light Grey	00340CL129	12	5.4	0.020
Anthracite Grey	00340CL144	12	5.4	0.020

White

20139 12 5.4 0.021



Complies with Standards
EN 16582-1
EN 16713-2

BCN03 POOL FLOOR RETURN INLET

ASTRALPOOL

Adjustable pool floor return inlet for liner pools. Designed to be glued to the inside of PN6 and PN10 piping. Made of white ABS, with self-tapping screws or with metal inserts. Plastic or stainless steel flange, depending on the model. Maximum flow rate: 9.5 m³/h.



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
PN6 self-tapping plastic flange	28230	12	3.25	0.031
With PN6 plastic flange inserts	28231	12	3.55	0.031
PN10 self-tapping stainless steel flange	28501	12	4.24	0.031
With PN10 stainless steel inserts	28502	12	4.54	0.031

LINER AND PREFABRICATED POOL

ABS INLETS



Complies with Standards
EN 16582-1
EN 16713-2

BCN03 ADJUSTABLE POOL FLOOR

return inlet



Pool floor return inlet for liner pools. Thanks to the adjustable feature, its installation in the pool floor is made extremely easy as it can be fitted after the concrete has been laid with wall conduit 43590.



	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
With plastic flange inserts	43586	12	2.04	0.033
Plastic self-tapping flange	43587	12	2.04	0.033
With stainless steel flange inserts	43588	12	2.04	0.033
Self-tapping stainless steel flange	43589	12	2.04	0.033



3" ADJUSTABLE POOL FLOOR return inlet



Made of white ABS. Suction. Comes with gaskets, flanges and screws. Flow rate adjusted by turning the grille. Suction surface area: 0.015 m². Flow rate at 0.4 m/s: 20 m³/h. Max. recommended flow rate: 26 m³/h. (0.5 m/s.).

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Grille in AISI-304 stainless steel	08316	2	2.65	0.047
Grille in white ABS	11795	2	2.65	0.047



DOUBLE GASKET KIT



Kit made up of a double gasket and the screws necessary for the installation of nozzles in panel pools. Made of TPE, the kit enables the installation of various accessories in pool shells and protects the panelling from coming into contact with water. Easy to install. Prevents corrosion of the panelling in the area that has been die cut.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Inserts for nozzles	43455-0500	80	-	0.035



RETURN INLET/SUCTION NOZZLE

for high flow rates



Return inlet for large flow rates that can also be used as a suction nozzle. Maximum suction flow rate of 30m³/h for a maximum flow rate speed of 4 m/s. Maximum suction flow rate of 5 m³/h for a maximum flow rate speed of 0.5 m/s. PVC body. Connection for Ø 75 or Ø 90 mm pipe. Inlets can be installed into bushing 43590. Grille can be adjusted in any direction.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
Panel pools	41518	10	5.50	0.021
Prefabricated pools	41521	12	4.20	0.021



Complies with Standard
EN 13451-3



SUCTION NOZZLE FOR OVERFLOW pools with liner

ASTRALPOOL 

PVC body. Maximum flow rate of 7 m³/h for a maximum flow rate velocity of 0.5 m/s. Connection for Ø 75 or Ø 90 piping. Nozzle with double gasket. Thanks to the design of the flange, the nozzle is able to take in all of the water in the overflow channel.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	41519	12	4.83	0.021



ADJUSTABLE POOL FLOOR

return inlet

ASTRALPOOL 


2" external thread. Made of AISI-316L stainless steel. Can be fitted in concrete and prefabricated pools. The water flow can be adjusted by loosening or tightening the central screw. Max. recommended flow rate compliant with standard EN 13451-3: 14 m³/h.

	Code	Standard Pack	Standard weight in kg	Standard volume in m ³
	15839	1	0.9	0.002

Complies with Standard
EN 13451-1-3

Complies with Standards
EN 16582-1
EN 16713-2



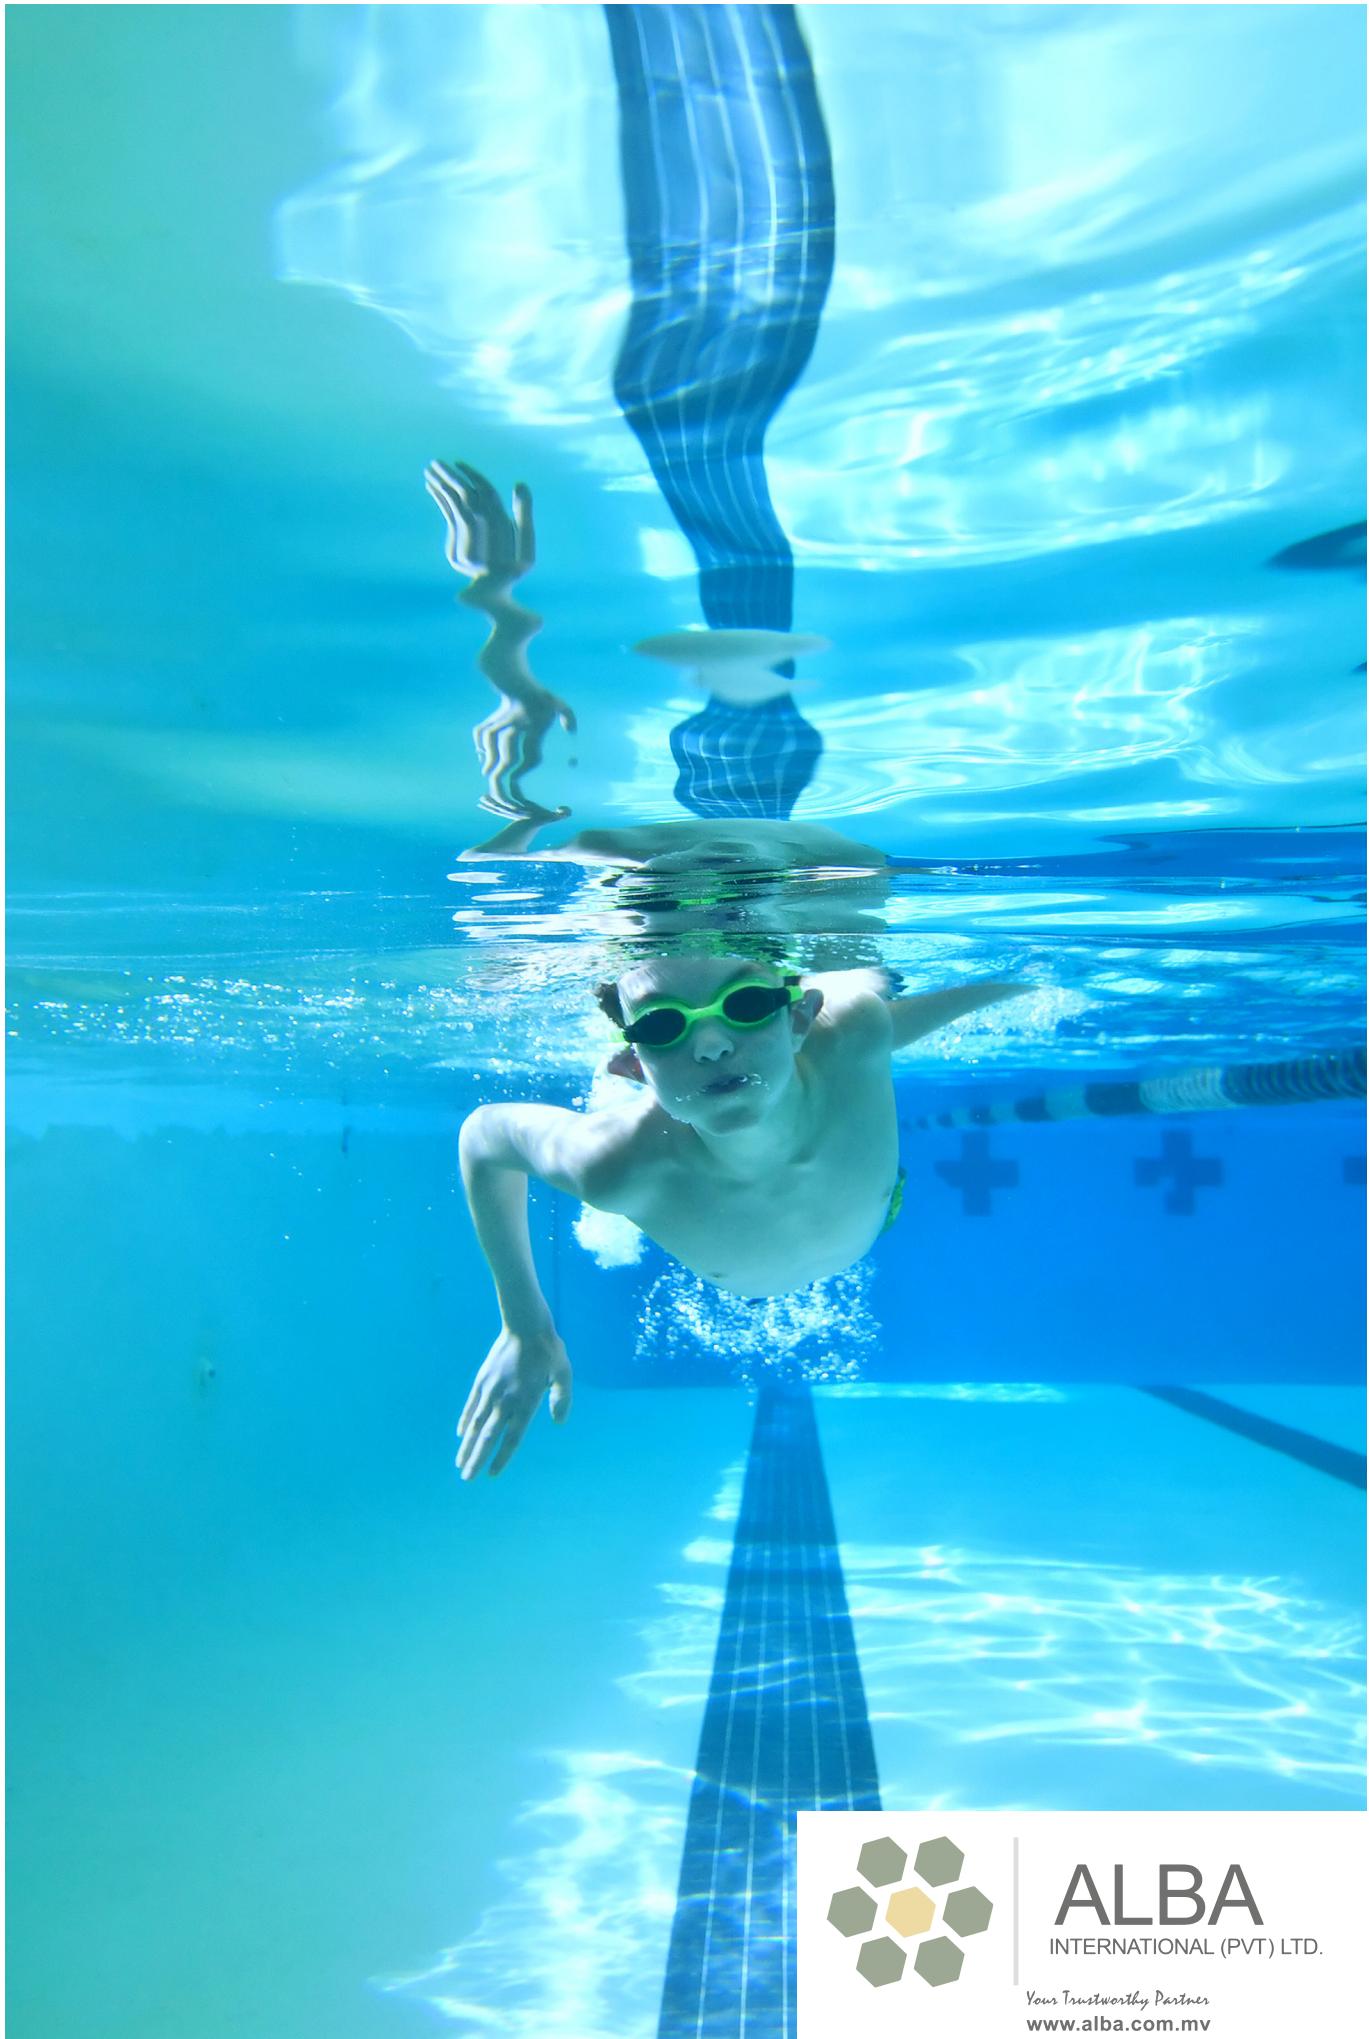

ALBA
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner
www.alba.com.mv