



ALBA  
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner  
[www.alba.com.mv](http://www.alba.com.mv)



# COMPETITION POOL

# Starting Platform Super Racer 800



This is a premium starting platform suitable for top performance training and competition venues.

The platform includes the FINA Approved Moveable Track Start and Safe Start Handles.



1. Glass-Reinforced plastic (GRP) construction with SS316 fittings.
2. Movable Track Start (MTS) adjustable to 5 positions.

- Durable, non-slip Aquadeck ® tread.
- Safe Start handles for fast starts and safety.
- Backstart handles reinforced with SS316 for safety and durability.
- Compatible with major electronic timing systems (including Omega RBD).
- 'No Dive' Covers available.

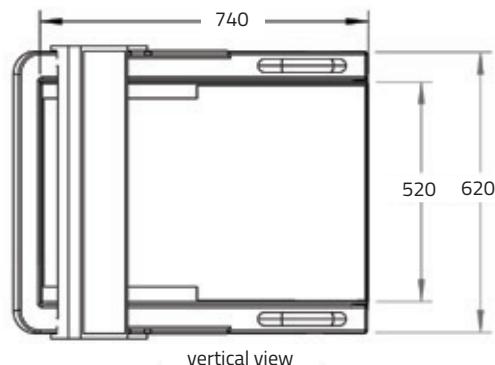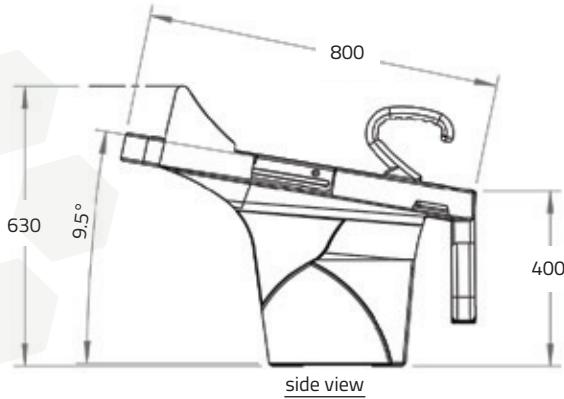


## Product Order Code

| Code      | Model  | Product         | Description    | Weight | Volume             |
|-----------|--------|-----------------|----------------|--------|--------------------|
| 931166132 | EOP017 | SUPER RACER 800 | GRP, 800mm Top | 43kg   | 0.42m <sup>3</sup> |
| 931166133 | EOP018 | PLATFORM COVER  | NO DIVING      | 2kg    | 0.05m <sup>3</sup> |


# Starting Platform Racer 600, Overflow Block Stand & Turn Board

## STARTING PLATFORM RACER 600

It is designed for the requirements of competition and training pools.

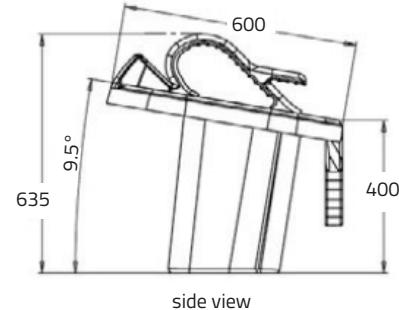

1. Glass-Reinforced plastic (GRP) construction with 316 SS fittings.
2. Compliant with FINA starting platform guide lines FR2.7.
3. Fixed Track Start and Safe Start handles for fast start times and safety.
4. Back start handle is reinforced with SS316.
5. Top features non-slip finish.




## Product Order Code

| Code      | Model  | Product   | Description                           | Weight | Volume             |
|-----------|--------|-----------|---------------------------------------|--------|--------------------|
| 931166135 | EOP115 | RACER 600 | STARTING PLATFORM GRP,<br>WHITE COLOR | 19.5kg | 0.27m <sup>3</sup> |


## OVERFLOW BLOCK STAND

The Overflow BlockStand provides a stable and durable platform for the installation of blocks in an overflow pool environment.

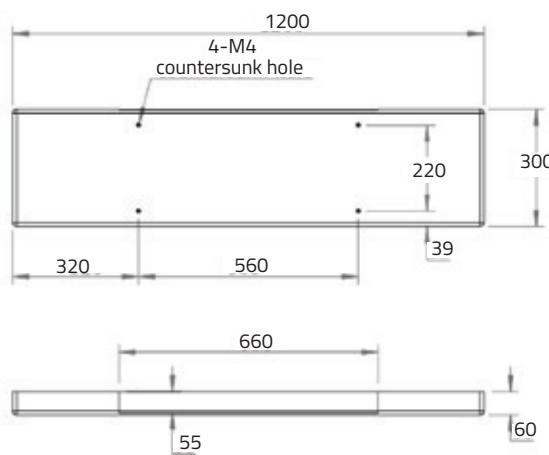

## TURN BOARD

Produced from FRP with SS316 fittings, the turn board provides positive confirmation of the pool end for the swimmer and attaches to the Overflow BlockStand with 4 x SS M4 Bolts.

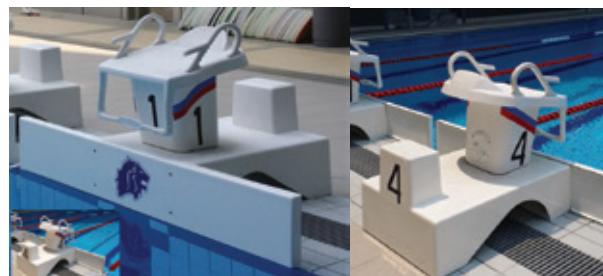

## Product Order Code

| Code      | Model  | Product              | Description     | Weight | Volume             |
|-----------|--------|----------------------|-----------------|--------|--------------------|
| 931166136 | EOP020 | OVERFLOW BLOCK STAND | GRP BLOCKSTAND  | 31kg   | 0.45m <sup>3</sup> |
| 931166137 | EOP021 | TURN BOARD GRP       | GRP 1.2m x 0.3m | 10kg   | 0.10m <sup>3</sup> |
| 931166138 | EOP429 | TURN BOARD GRP       | GRP 2.0m x 0.3m | 13kg   | 0.15m <sup>3</sup> |

# Racing Lane

## Super Tensioner Design:

1. Meet FINA (2013-2017) requirements
2. Threaded rod allows safe and simple lengthening or shortening of lane ropes.
3. Stainless Steel rod with brass ferrule and glass filled polycarbonate body construction.
4. Cable is SS316 with diameter of 3.1mm and max force of 5KN.
5. Super tensioner body length including lock nut is 230mm.
6. All fittings are marine grade SS316.
7. Super Tensioner is tested up to 4kN line pressure, allowing high performance wave dissipation.



## Product Order Code


| Code      | Model  | Product         | Description                         | Weight | Volume              |
|-----------|--------|-----------------|-------------------------------------|--------|---------------------|
| 931166122 | EOP001 | 25m Small       | Racing Lane 110mm diameter          | 29kg   | 0.34m <sup>3</sup>  |
| 931166123 | EOP002 | 25m Large       | Racing Lane 150mm diameter          | 34kg   | 0.62m <sup>3</sup>  |
| 931166124 | EOP003 | 50m Small       | Racing Lane 110mm diameter          | 57kg   | 0.68m <sup>3</sup>  |
| 931166125 | EOP004 | 50m Large       | Racing Lane 150mm diameter          | 68kg   | 1.20m <sup>3</sup>  |
| 931166126 | EOP005 | Super Tensioner | Lane tensioner with Short Clamp set | 0.06kg | 0.001m <sup>3</sup> |
| 931166127 | EOP009 | LONG Clamp      | Supplied with SS Hook               | 0.1kg  | 0.001m <sup>3</sup> |



Small LANE



Large LANE



EOP009

1. The small LANE 110mm is suitable for competition, water polo and general pool division.
2. The large LANE 150mm is designed for optimal water dissipation and wave control in high turbidity competitive environments (shown above), such as top National and International competition venues.




EOP005



# Lane Anchors, Deck Hole Anchors & Overflow Lane Anchors

## LANE ANCHORS

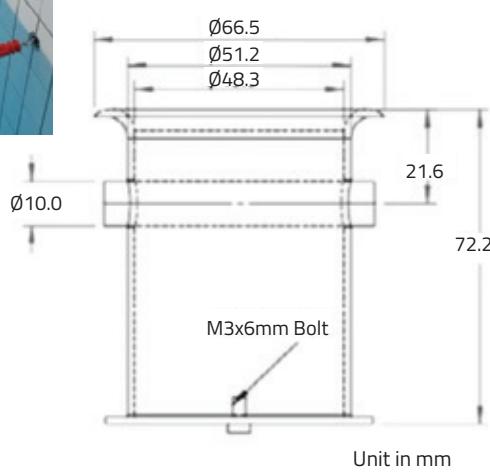


Lane Anchor S316

Racing Lane Anchors provide secure flush anchoring to the pool for lane ropes and goal lines

1. SS316 Lane Anchor with 38.1mm or 48.3mm diameter x 72.2mm length.
2. Optional Booker Rod may be used if required.
3. Feature flush fitting end cap


## DECK HOLE ANCHORS

1. Provides a flush and secure anchor for equipment.
2. Fabricated from either marine grade SS316 or Nylon.
3. SS316 Deck Hole available in 38.1mm x 100mm.
4. Marine Nylon Deck Anchor (not pictured) available in 48.3mm x 125mm only.

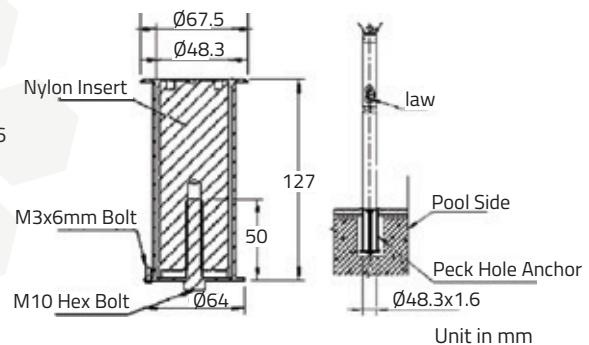

## OVERFLOW LANE ANCHORS

Overflow Lane Anchors provide secure anchoring of Lanes to the pool in overflow pools.

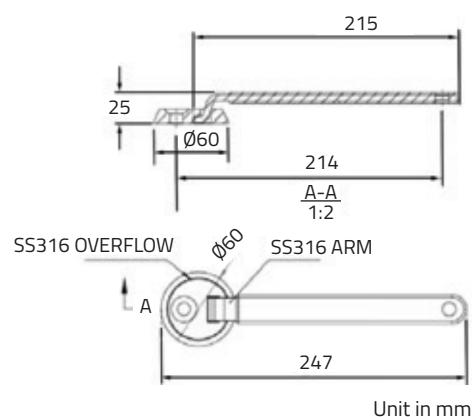

### Product Order Code

| Code      | Model  | Product              | Description                           | Weight  | Volume              |
|-----------|--------|----------------------|---------------------------------------|---------|---------------------|
| 931166128 | EOP030 | LANE ANCHOR          | SS316, 38.1mm or 48.3mm dia. x 72.2mm | 0.3 kg  | 0.001m <sup>3</sup> |
| 931166129 | EOP031 | DECK HOLE ANCHOR     | SS316, 48.3mm x 125mm                 | 0.54 kg | 0.001m <sup>3</sup> |
| 931166130 | EOP121 | OVERFLOW LANE ANCHOR | SS316, 215mm length                   | 0.38 kg | 0.001m <sup>3</sup> |
| 931166131 | EOP122 | LANE ANCHOR HOOK     | SS316 Hook, 200mm length              | 0.18 kg | 0.001m <sup>3</sup> |

# Lane Roller & Lane Saver

## LANE ROLLER

1. High capacity, unbeatable quality.
2. Powder Coated Aluminum construction.
3. Exceptional Capacity - holds up to 6 x 25m Small 110mm lanes or 4 x 25m Large 150mm.
4. Strong SS316 Castor Wheels with brake.



### Product Order Code

| Code      | Model  | Product | Description           | Weight | Volume             |
|-----------|--------|---------|-----------------------|--------|--------------------|
| 931166142 | EOP010 | STOREEL | ALU Lane Storage Reel | 48kg   | 0.47m <sup>3</sup> |

## LANE SAVER

Lane Saver provides a safe and quick removal and installation of racing lanes and prevent pool edge damage.

1. Hooks over the pool edge to enable easy and safe removal of lanes.
2. Produced from reinforced Fiber-reinforced plastic (FRP).



### Product Order Code


| Code      | Model  | Product    | Description      | Weight | Volume             |
|-----------|--------|------------|------------------|--------|--------------------|
| 931166147 | EOP013 | LANE SAVER | GRP LANE REMOVAL | 3.25kg | 0.07m <sup>3</sup> |

# **SBack Stroke, False Start Set & Lifeguard Chair**

## **BACK STROKE & FALSE START SET**

Contains a complete set of poles, flags, lines and pool deck fittings, including:

1. 2 x SS316 False Start Poles.
2. 1 x False Start Flags and Rope
3. 2 x Deck Hole Anchors
4. Three sizes available - 21m, 25m and 50m.

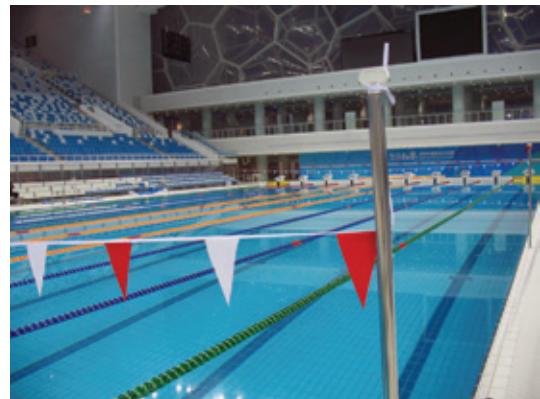

### **Product Order Code**

| Code      | Model  | Product                            | Description                     | Weight | Volume             |
|-----------|--------|------------------------------------|---------------------------------|--------|--------------------|
| 931166139 | EOP039 | FALSE START SET WITH ANCHOR & ROPE | SS316 Poles x 2, DH Anchors x 2 | 30kg   | 0.40m <sup>3</sup> |
| 931166140 | EOP032 | BACKSTROKE SET w FLAGS             | SS316 Poles x 2, DH Anchors x 2 | 54kg   | 0.65m <sup>3</sup> |

## **LIFEGUARD CHAIR**

1. Sturdy Aluminum construction with white powder coating.
2. Nylon wheels allows the chair to be safely moved.
3. Rubber inserts protect the pool deck from scratches and ensures stable positioning.
4. Lifeguard chair has fittings for the mounting of a lifeguard buoy and Umbrella, both located just behind the seating location.
5. Height from ground to base of seat is 1895mm.
6. Base dimensions are 1200mm x 1200mm.
7. Total height to top of chair is 2000mm.



### **Product Order Code**

| Code      | Model  | Product         | Description                  | Weight | Volume             |
|-----------|--------|-----------------|------------------------------|--------|--------------------|
| 931166141 | EOP012 | LIFEGUARD CHAIR | ALU LifeGuard Chair - 4 Step | 51kg   | 1.24m <sup>3</sup> |

# Block Platform & Grating

## BLOCK PLATFORM

It is designed to provide a safe and efficient means of managing competition and fitness swimming in an overflow or 'wet deck' pool environment.

1. Compliance FINA standard for competition and training events.
2. Enables the installation of starting blocks and timing equipment in over flow pool environment
3. Movable gratings on top and sides for quick and easy cleaning.
4. Support most popular timing Systems and touch pads.
5. Non-slip surface provides positive confirmation of the end of the pool to the swimmer as well as safe and speedy exiting of the pool.



### Product Order Code


| Code      | Model  | Product               | Description                              | Weight | Volume             |
|-----------|--------|-----------------------|--|--------|--------------------|
| 931166149 | EOP023 | FRP BLOCK PLATFORM    | White FRP<br>2.5m x 0.7m x 0.3m          | 60kg   | 0.80m <sup>3</sup> |
| 931166148 | EOP024 | HITECH BLOCK PLATFORM | White Extruded Plast<br>2.5m x 1m x 0.3m | 100kg  | 1.00m <sup>3</sup> |

## GRATING

Competition Pool Gratings connection joint by interlocking design that maximum strength and durability on the pool deck to provide better of comfort under the feet.

### Features:

1. Safe and non-toxic Polypropylene (PP) material with strong and durable interlocking connection joint between each grating.
2. Anti-Slip's slip resistance grade is equivalent to DIN 51097 testing criteria, Category B.
3. UV resistant and color consistent.
4. Easy maintenance and cleaning
5. Available in 250mm, 300mm, and 350mm width

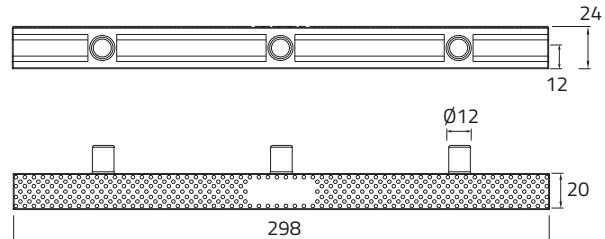

### Product Order Code

| Code      | Model  | Product       | Description         | Weight | Volume             |
|-----------|--------|---------------|---------------------|--------|--------------------|
| 931166144 | EOP026 | TRANSGRATE PP | 250mm Width Grating | 3kg    | 0.01m <sup>3</sup> |
| 931166145 | EOP027 | TRANSGRATE PP | 300mm Width Grating | 4.7kg  | 0.01m <sup>3</sup> |
| 931166146 | EOP028 | TRANSGRATE PP | 350mm Width Grating | 5.5kg  | 0.01m <sup>3</sup> |



**ALBA**  
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner  
[www.alba.com.mv](http://www.alba.com.mv)



## EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: 2/F, LOCKHART CENTRE, NO. 301-307 LOCKHART ROAD,  
WANCHAI, HONG KONG  
PHONE +852 2832 9880  
[https://www.emauxgroup.com](http://https://www.emauxgroup.com)

 **YOUR PREMIER SUPPLIER**

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

© 2025 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.



Websites and Social Media