

# WALL MOUNTED



## Saving Operation Cost

### High Energy Efficiency




The advanced technologies of LG achieve lower energy consumption, especially in cooling as can be seen from the SEER class given according to ErP Regulations.

Server room need to be operated continuously.

That's why server room owners want to use high energy efficient air conditioning.

LG solution saves annual operation cost for server room due to high SEER.

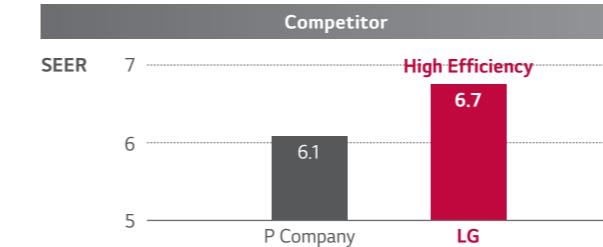

LG Server Room Solution					
SEER class (ErP regulation)					
	2.5kW	3.4kW	5.0kW	6.8kW	8.0kW
SEER	7.0 (A++)	6.6 (A++)	6.8 (A++)	6.7 (A++)	7.0 (A++)
SCOP				4.3 (A+)	3.85 (A+)


SEER class (ErP regulation)			
A+++	SEER≥8.5	B	4.6 ≤ SEER < 5.1
A++	6.1 ≤ SEER < 8.5	C	4.1 ≤ SEER < 4.6
A+	5.6 ≤ SEER < 6.1	D	3.6 ≤ SEER < 4.1
A	5.1 ≤ SEER < 5.6		

※ P Company 7.1kW Solution / Outdoor unit : 7.1kW  
Indoor unit : 7.1kW Wall mounted unit  
※ Performances are based on the following conditions :  
• Cooling : Indoor Temp. 27°CDB / 19°CWB, Outdoor Temp. 35°CDB / 24°CWB  
• Heating : Indoor Temp. 20°CDB / 15°CWB, Outdoor Temp. 7°CDB / 6°CWB  
• Interconnected Pipe is standard length and difference of Elevation  
(Outdoor ~ Indoor Unit) is 0m.

## Easy Installation

### Simplified Connection

For small server rooms, LG solution has simple system with only one remote controller. It doesn't need additional control accessories.

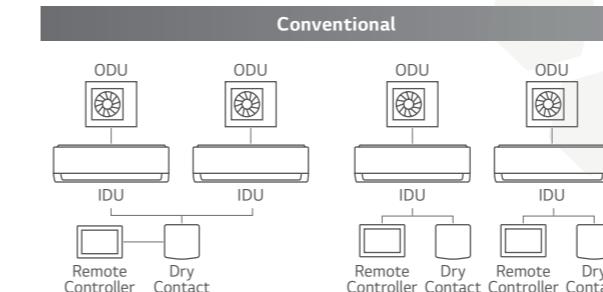

#### • Higher product cost

Conventional system needs dry contact and 3<sup>rd</sup> party control individual remote controller(s).

#### • Higher installation cost

Need less labor and time for design, installation, cabling and test.

#### • Design & Installation difficulties

It is difficult to make if you need to control more indoor units.



#### • Lower product cost

Only LG remote controller needed for max.4 ODUs and IDUs.

#### • Lower installation cost

Need less labor and time for design, installation, cabling and test.


#### • Easy Design & Installation

It provides easy design and installation because it has simple system with LG controller even in case of more number of ODUs and IDUs(Max.4).

※ MJ09PC, MJ12PC, MJ18PC, MJ24PC combinations are only available

### Detachable Bottom Cover


The bottom cover is detachable when needed, making installation easier. Disassembly or additional support of the unit is unnecessary. Installation can be completed by one individual with LG's patented support tool.



※ This contents of page will be updated later. (Saving operation cost / Easy installation)

### Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.




**ALBA**  
INTERNATIONAL (PVT) LTD.

Your Trustworthy Partner  
www.alba.com.mv

# Stable & Reliable Operation


## Duty Rotation

Operates more than 2 sets of indoor units alternatively at every set time of operation interval. Rotation interval can be set from 1h to 999h freely.

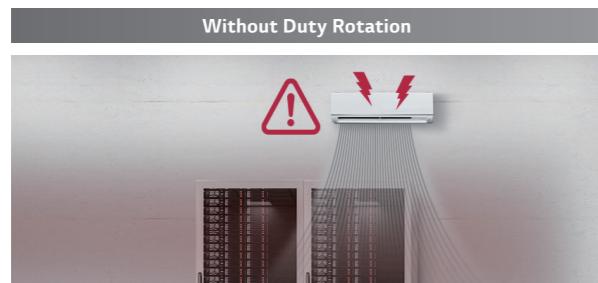

### Air Conditioners' Overworking

- Reducing air conditioner's life time
- Reducing compressor's life expectancy
- The service cost may increase due to air conditioner's overworking

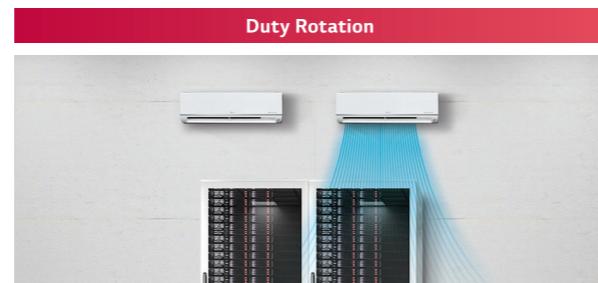


### Stable & Safe Operation

- Stable operation due to indoor units take turns
- Less breakdown and keeping server room operation
- Increase air conditioner's life expectancy
- Rotation interval can be set from 1h to 999h freely.

## Capacity Back-up

When the difference between the cooling set temperature and the current room temperature is higher than the set temperature difference of capacity back-up, the standby unit operates. When the temperature difference reaches to the set temperature difference, it goes back to the normal duty rotation.

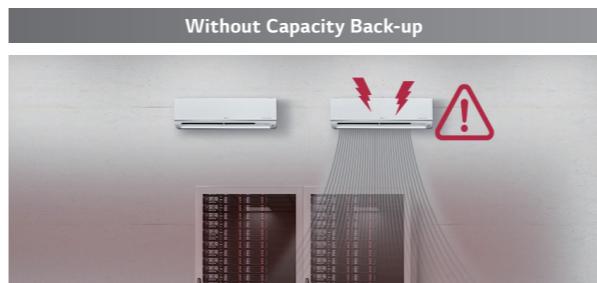



### Server can be Overheated

- Sometimes server room can be overheated because of server overload
- Server can be shut down when they overheat continuously
- Air conditioners overload
- Need manual controls for additional cooling




### Stable & Safe Operation

- Stable operation due to the over capacity by back-up operation
- Prevent air conditioners from overload
- Protect server from overheating
- No need for manual controls as they protect from overheating automatically

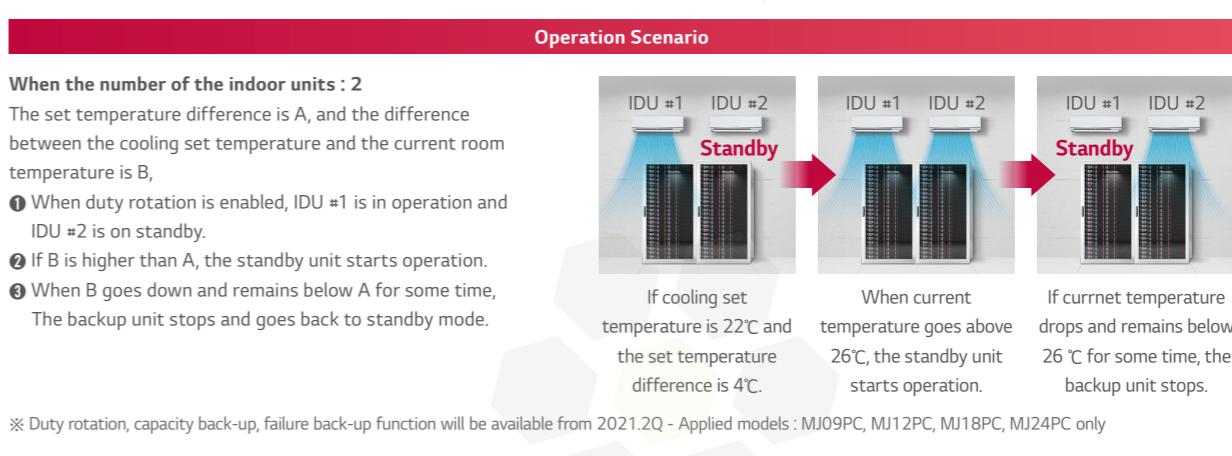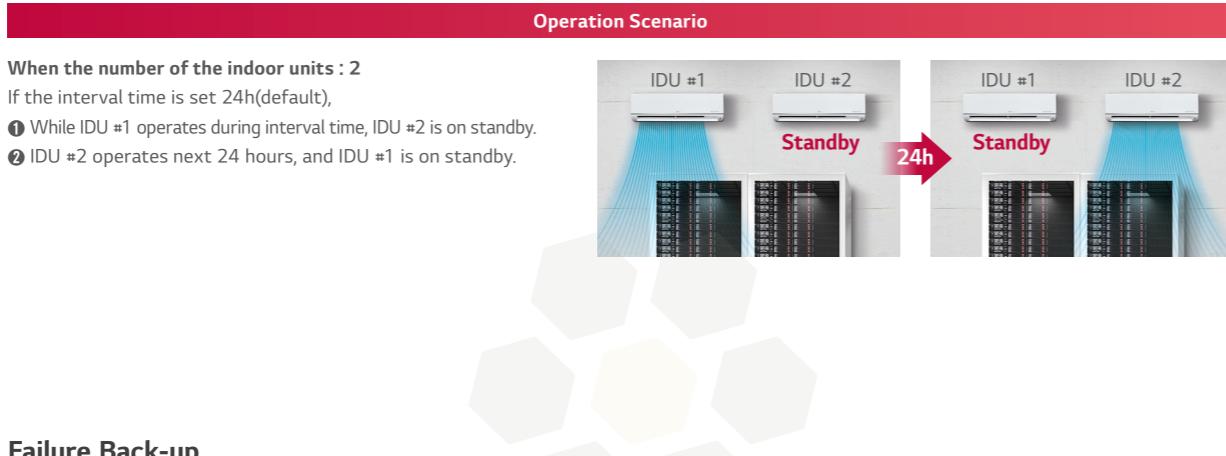


## Failure Back-up

If systems in operation have error and stop, the standby unit starts operation automatically.

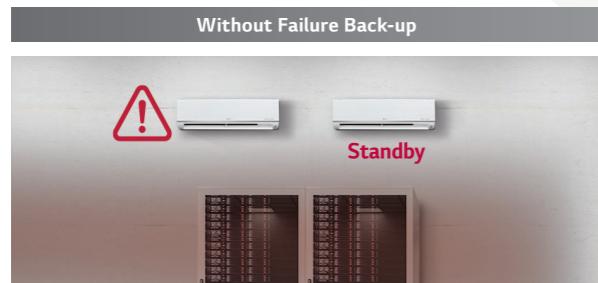


### Server can be Shut Down

- Server room overheated and server can be shut down.
- Probability of increased service cost
- Need manual monitoring and operation for failure

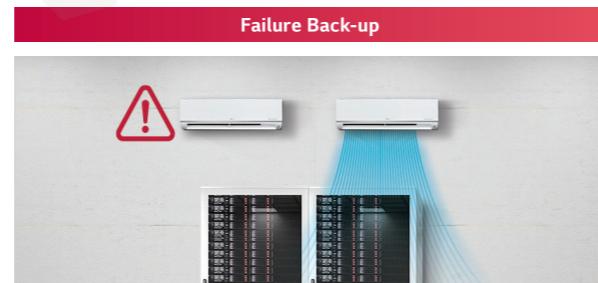

### Stable & Safe Operation

- Stable operation because the operation error can be covered by failure back-up operation
- Continue server operations and decrease risk
- Protect server from overheating
- Less manual work

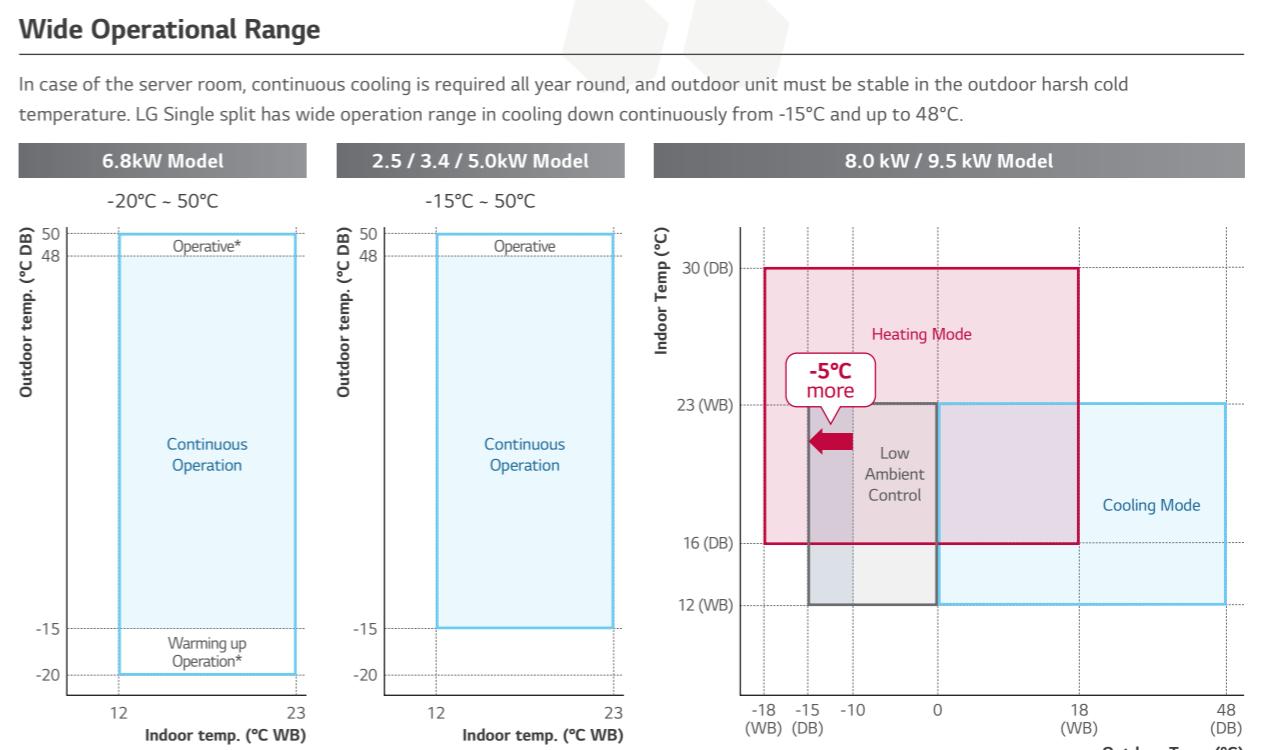

\* Warming up operation and operative means that the outdoor unit operates to reach the range of continuous operating, however it may not operate continuously due to safety or protection logic.

**STANDARD INVERTER (R32)**

MJ09PC / MJ12PC



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
[www.eurovent-certification.com](http://www.eurovent-certification.com)

UUA1 ULO



COMBINATION	9		12	
Capacity	Cooling	Min. / Rated / Max. kW	1.50 / 2.50 / 3.20	1.50 / 3.50 / 4.00
	Heating	Min. / Rated / Max. kW	1.80 / 3.20 / 3.70	1.80 / 4.00 / 4.40
Power Input	Cooling	Min. / Rated / Max. kW	0.30 / 0.58 / 0.84	0.33 / 0.97 / 1.48
	Heating	Min. / Rated / Max. kW	0.30 / 0.71 / 0.85	0.33 / 1.00 / 1.48
Running Current	Cooling	Rated A	2.60	4.40
	Heating	Rated A	3.20	4.50
EER / COP		kWh / kWh	4.30 / 4.50	3.60 / 4.00
SEER / SCOP		kWh / kWh	7.00 / 4.00	6.60 / 4.00
P Design	Cooling @ 35°C	kW	2.5	3.5
	Heating @-10°C	kW	2.8	2.8
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	125 / 980	186 / 980
Dehumidification Rate		ℓ/h	1.90	1.90
ODU Sound Pressure Level	Cooling	Rated dB(A)	49	49
	Heating	Rated dB(A)	52	52
ODU Sound Power Level	Cooling	Rated dB(A)	65	65
	Heating	Rated dB(A)	-	-
Piping Connections	Liquid	Outer Dia. mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas	Outer Dia. mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Connections Method		Flare	Flare
Operation Range (Outdoor)	Cooling	Min. / Max. °C	-15 / 50	-15 / 50
	Heating	Min. / Max. °C	-20 / 18	-20 / 18
<b>INDOOR</b>	<b>MJ09PC NSJ</b>		<b>MJ12PC NSJ</b>	
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input	Min. / Nom. / Max. W	11 / 18 / 30	11 / 19 / 30	
Air Flow Rate	H / M / L	m³/min	7.6 / 6.2 / 4.8	8.0 / 6.6 / 5.5
Dimensions	Body	W x H x D mm	818 x 316 x 189	818 x 316 x 189
Weight	Body	kg (lbs)	8.2 (18.1)	8.2 (18.1)
	Shipping	kg (lbs)	10.2 (22.5)	10.2 (22.5)
Sound Pressure Level	Cooling	H / M / L	36 / 32 / 27	38 / 34 / 29
Sound Power Level	Cooling	Max. dB(A)	56	56
Piping Connections	Drain	O.D. / I.D. mm	Ø 21.5 / 16.0	Ø 21.5 / 16.0
<b>OUTDOOR</b>	<b>UUA1 ULO</b>			
Power Supply	Ø / V / Hz	1 / 220-240 / 50		
Circuit Breaker	Min. A	15		
Power Supply Cable (included Earth)	No. x mm²	3C x 1.5		
Dimensions	Net	W x H x D mm	770 x 545 x 288	
Weight	Net	kg	33.3	
Compressor	Type	-	Twin Rotary	
	Type	-	R32	
	GWP (Global Warming Potential)	-	675	
	Precharged Amount	kg	1.0	
Refrigerant	t-CO <sub>2</sub> eq.	-	0.675	
	Control	-	EEV	
	Additional Charging Volume	g/m	20	
	Air Flow Rate	Rated m³/min x No.	28 x 1	
Total Piping Length	Min. / Max. m		5.0 / 30.0	
Piping Elevation	IDU-ODU	Max. m	30	

**STANDARD INVERTER (R32)**

MJ18PC / MJ24PC



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
[www.eurovent-certification.com](http://www.eurovent-certification.com)

UUB1 U20 UUC1 U40



COMBINATION	18		24	
Capacity	Cooling	Min. / Rated / Max. kW	2.00 / 5.00 / 7.00	2.70 / 6.80 / 7.70
	Heating	Min. / Rated / Max. kW	2.30 / 5.80 / 6.10	3.00 / 6.90 / 7.24
Power Input	Cooling	Min. / Rated / Max. kW	0.30 / 1.39 / 2.63	0.40 / 2.00 / 2.57
	Heating	Min. / Rated / Max. kW	0.30 / 1.71 / 1.96	0.40 / 2.33 / 2.50
Running Current	Cooling	Rated A	6.30	9.10
	Heating	Rated A	7.70	10.60
EER / COP		kWh / kWh	3.61 / 3.40	3.40 / 3.00
SEER / SCOP		kWh / kWh	6.80 / 4.00	6.70 / 3.90
P Design	Cooling @ 35°C	kW	5.0	6.8
	Heating @-10°C	kW	4.1	5.0
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A
Annual Energy Consumption	Cooling / Heating	kWh	257 / 1,365	355 / 1,795
Dehumidification Rate		ℓ/h	3.35	3.50
ODU Sound Pressure Level	Cooling	Rated dB(A)	47	48
	Heating	Rated dB(A)	52	52
ODU Sound Power Level	Cooling	Rated dB(A)	63	65
	Heating	Rated dB(A)	-	-
Piping Connections	Liquid	Outer Dia. mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas	Outer Dia. mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Connections Method		Flare	Flare
Operation Range (Outdoor)	Cooling	Min. / Max. °C	-15 / 50	-20 / 50
	Heating	Min. / Max. °C	-20 / 18	-20 / 18
<b>INDOOR</b>	<b>MJ18PC NSK</b>		<b>MJ24PC NSK</b>	
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input	Min. / Nom. / Max. W	26 / 39 / 60	27 / 45 / 60	
Air Flow Rate	H / M / L	m³/min	15.8 / 12.4 / 10.0	16.9 / 12.8 / 10.4
Dimensions	Body	W x H x D mm	975 x 354 x 209	975 x 354 x 209
Weight	Body	kg (lbs)	10.9 (24.0)	11.5 (25.4)
	Shipping	kg (lbs)	13.9 (30.6)	14.5 (32.0)
Sound Pressure Level	Cooling	H / M / L	44 / 38 / 34	46 / 41 / 36
Sound Power Level	Cooling	Max. dB(A)	59	65
Piping Connections	Drain	O.D. / I.D. mm	Ø 21.5 / 16.0	Ø 21.5 / 16.0
<b>OUTDOOR</b>	<b>UUB1 U20</b>		<b>UUC1 U40</b>	
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker	Min. A	20	25	
Power Supply Cable (included Earth)	No. x mm²	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D mm	870 x 650 x 330	950 x 834 x 330
Weight	Net	kg	44.5	57.7
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.2	1.9
Refrigerant	t-CO <sub>2</sub> eq.	-	0.810	1.283
	Control	-	EEV	EEV
	Additional Charging Volume	g/m	20	40
	Air Flow Rate	Rated m³/min x No.	50 x 1	58 x 1
Total Piping Length	Min. / Max. m		5.0 / 35.0	5.0 / 50.0
Piping Elevation	IDU-ODU	Max. m	30	30

**STANDARD INVERTER (R32)****US30F / US36F**

LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
[www.eurovent-certification.com](http://www.eurovent-certification.com)

**UUC1 U40 UUD1 U30 UUD3 U30**

COMBINATION		30	36	36
Capacity	Cooling	Min. / Rated / Max. kW	3.2 / 8.0 / 9.0	3.8 / 9.5 / 12.5
	Heating	Min. / Rated / Max. kW	3.6 / 9.0 / 10.0	4.3 / 10.8 / 13.4
Power Input (Set)	Cooling	Min. / Rated / Max. kW	0.50 / 2.28 / 3.17	0.30 / 2.57 / 3.91
	Heating	Min. / Rated / Max. kW	0.50 / 2.5 / 3.20	0.50 / 2.77 / 3.77
Running Current	Cooling	Rated A	10.1	11.4
	Heating	Rated A	11.1	12.2
EER / COP		kWh / kWh	3.51 / 3.60	3.70 / 3.90
SEER / SCOP		kWh / kWh	7.0 / 4.3	6.10 / 3.85
Pdesign	Cooling @ 35°C	kW	8	9.5
	Heating @ -10°C	kW	5.4	8.7
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A
Annual Energy Consumption	Cooling / Heating	kWh	400 / 1,758	545 / 3,164
Dehumidification Rate		l/h	2.9	3.8
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 52	50 / 50
ODU Sound Power Level	Cooling	Rated dB(A)	68	66
Piping Connections	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min. / Max. °C	-20 ~ 50	-20 ~ 52
	Heating	Min. / Max. °C	-20 ~ 18	-25 ~ 18
<b>INDOOR</b>		<b>US30F NRO</b>	<b>US36F NRO</b>	<b>US36F NRO</b>
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Input (IDU)	H / M / L	W	47 / 42 / 36	65 / 47 / 42
Air Flow Rate	H / M / L	m3/min	21 / 17 / 13	25 / 21 / 17
Dimensions	Body	W x H x D	1,200 x 360 x 265	1,200 x 360 x 265
Weight	Body	kg	18.3	18.3
Sound Pressure Level	Cooling	H / M / L	46.0 / 42.0 / 38.0	51.0 / 46.0 / 42.0
Sound Power Level	Cooling	Max. dB(A)	62	65
Piping Connections	Drain	O.D. / I.D. mm	Ø21.5 / 16.0	Ø21.5 / 16.0
<b>OUTDOOR</b>		<b>UUC1 U40</b>	<b>UUD1 U30</b>	<b>UUD3 U30</b>
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	3 / 380-415 / 50
Circuit Breaker	Min.	A	25	40
Power Supply Cable (Included Earth)	No x mm <sup>3</sup>	3C x 2.5	3C x 6.0	5C x 2.5
Dimensions	Net	W x H x D	950 x 834 x 330	950 x 1,380 x 330
Weight	Net	kg	57.7	85
Compressor	Type	-	Twin Rotary	Inverter Scroll
	Type	-	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.9	3.0
Fan	t-CO <sub>2</sub> eq	-	1.283	2.025
	Additional Charge (After 7.5m)	g/m	40	40
Total Piping Length	Air Flow Rate	Rated m <sup>3</sup> /min x No.	58 x 1	55 x 2
	Min. / Max.	m	5 / 50	5 / 85
Piping Elevation	IDU - ODU	Max. m	30	30

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp 27°C DB / 19°C WB, Outdoor Ambient Temp 35°C DB / 24°C WB
  - Heating : Indoor Ambient Temp 20°C DB / 15°C WB, Outdoor Ambient Temp 7°C DB / 6°C WB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R32)

**COMPACT INVERTER (R32)****US30F / US36F**

LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
[www.eurovent-certification.com](http://www.eurovent-certification.com)

**UUB1 U20 UUC1 U40**

COMBINATION		30	36	
Capacity	Cooling	Min. / Rated / Max. kW	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.6
	Heating	Min. / Rated / Max. kW	3.1 / 7.7 / 8.5	4.3 / 10.8 / 11.5
Power Input (Set)	Cooling	Min. / Rated / Max. kW	0.50 / 2.31 / 2.77	0.60 / 3.06 / 3.67
	Heating	Min. / Rated / Max. kW	0.40 / 2.14 / 2.78	0.60 / 3.0 / 3.72
Running Current	Cooling	Rated A	10.1	13.6
	Heating	Rated A	9.3	13.3
EER / COP		kWh / kWh	3.25 / 3.60	3.10 / 3.60
SEER / SCOP		kWh / kWh	6.8 / 4.1	6.4 / 4.1
Pdesign	Cooling @ 35°C	kW	7.5	9.5
	Heating @ -10°C	kW	4.3	5.8
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	386 / 1,468	520 / 1,980
Dehumidification Rate		l/h	3.0	3.5
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated dB(A)	67	70
Piping Connections	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min. / Max. °C	-10 ~ 48	-20 ~ 50
	Heating	Min. / Max. °C	-15 ~ 18	-15 ~ 18
<b>INDOOR</b>		<b>US30F NRO</b>	<b>US36F NRO</b>	
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input (IDU)	H / M / L	W	47 / 42 / 36	65 / 47 / 42
Air Flow Rate	H / M / L	m3/min	21 / 17 / 13	25 / 21 / 17
Dimensions	Body	W x H x D	1,200 x 360 x 265	1,200 x 360 x 265
Weight	Body	kg	18.3	18.3
Sound Pressure Level	Cooling	H / M / L	46.0 / 42.0 / 38.0	51.0 / 46.0 / 42.0
Sound Power Level	Cooling	Max. dB(A)	62	65
Piping Connections	Drain	O.D. / I.D. mm	Ø21.5 / 16.0	Ø21.5 / 16.0
<b>OUTDOOR</b>		<b>UUB1 U20</b>	<b>UUC1 U40</b>	
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker	Min.	A	20	25
Power Supply Cable (Included Earth)	No x mm <sup>3</sup>	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D	870 x 650 x 330	950 x 834 x 330
Weight	Net	kg	44.5	57.7
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.2	1.9
Fan	t-CO <sub>2</sub> eq	-	0.81	1.283
	Additional Charge (After 7.5m)	g/m	40	40
Total Piping Length	Air Flow Rate	Rated m <sup>3</sup> /min x No.	50 x 1	58 x 1
	Min. / Max.	m	5 / 35	5 / 50
Piping Elevation	IDU - ODU	Max. m	30	30

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp 27°C DB / 19°C WB, Outdoor Ambient Temp 35°C DB / 24°C WB
  - Heating : Indoor Ambient Temp 20°C DB / 15°C WB, Outdoor Ambient Temp 7°C DB / 6°C WB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R32)

## Communication Kit



PAHCMR000 / PAHCMS000

### Specification

MODEL	COMBINATION		DESCRIPTION	DIMENSIONS (MM)		
	OUTDOOR UNIT	CENTRALIZED CONTROLLER		W	H	D
PAHCMR000	Single Split	•	Return / Room air temperature control by DDC or LG individual / centralized controller	300	300	155
PAHCMS000	Single Split	•	Discharge air temperature control by DDC or LG individual / centralized controller	380	300	155

### Function list for Communication kit

FUNCTION LIST*		PAHCMR000	PAHCMS000	NOTE
Control	Comm. Kit Operation	On / Off	On / Off	
	Operation Mode <sup>1)</sup>	Cooling / Heating	Cooling / Heating	
	Return (room) Air Temperature	16-30°C	-	
	Discharge Air Temperature <sup>2)</sup>	-	16-30°C	Available in case of using DDC with Modbus or LG Control system
	Fan Speed <sup>3)</sup>	Low / Middle / High	Low / Middle / High	It may not be possible depending on the particular condition
	Forced Thermal On / Off	On / Off	-	Available in case of using DDC with contact signal
Monitor	Capacity Control	-	•	Available in case of using DDC with Modbus or contact signal
	Comm. Kit Operation	On / Off	On / Off	
	Operation Mode <sup>1)</sup>	Cooling / Heating	Cooling / Heating	Available in case of using DDC with Modbus or LG Control system
	Fan Speed	Low / Middle / High	Low / Middle / High	
	Error Alarm	•	•	
	Compressor On / Off	On / Off	On / Off	Available in case of using DDC with Modbus or LG individual controller PAHCMR000 doesn't provide this in case of using DDC with contact signal

1) Available operation mode can be varied depending on the setting of AHU Communication Kit.

2) This range may differ depending on the type of controller.

3) To control and monitor the fan speed, DO ports for the fan speed status have to be connected with the fan unit.

\* Some of functions may not be possible depending on the setting of AHU Communication Kit. For more details of condition, please refer to the product data book.

### Combination Table

Model Name	R32			R410A		
	UUA1 ULO	UUB1 U20	UUC1 U40	UUD1 U30 UUD3 U30	UU70W U34	UU85W U74
Capacity Index Range	kBtu/h kW	9 ~ 18 2.5 ~ 5.0	18 ~ 30 5.0 ~ 8.0	24 ~ 36 6.8 ~ 10.0	36 ~ 60 10.0 ~ 14.6	70 20.0
PAHCMR000	X	0	0	0	0	0
PAHCMS000	X	0	0	0	0	0

## ACCESSORIES



## UVnano™ Filter Box

UVnano Filter Box can effectively create a safe indoor environment by trapping and removing various harmful substances such as fine dust, bacteria and viruses in the form of droplets.



UVnano Filter Box Kit (Included ePM1 Filter)  
**PBM13M3UA0 / PBM13M2UA0 / PBM13M1UA0**


ePM1 Filter  
**FBM13M3UA0 / FBM13M2UA0 / FBM13M1UA0**

PLATFORM MODEL NAME	UNIT	M3 PLATFORM PBM13M3UA0	M2 PLATFORM PBM13M2UA0	M1 PLATFORM PBM13M1UA0
Duct UVnano Filter Box	-			
Net Size (W x H x D)	mm	1,250 x 360 x 280	1,250 x 270 x 280	900 x 270 x 280
Shipping Size (W x H x D)	mm	1,440 x 430 x 377	1,440 x 340 x 377	1,048 x 340 x 377
Net Weight	kg	12.7	11.6	9.1
Pre-Filter (1)	Size (W x H x D) mm	596 x 377 x 4	596 x 247 x 4	596 x 247 x 4
	Mesh	-	34 x 39	34 x 39
	Color	-	Black	Black
	Quantity	EA	2	1
Pre-Filter (2)	Size (W x H x D) mm	-	-	247 x 247 x 4
	Mesh	-	-	34 x 39
	Color	-	-	Black
	Quantity	EA	-	1
UVnano	UVC Wavelength nm	275	275	275
	UVC LED Quantity	EA	8	8
Filter (1)	Model Name	<b>FBM13M3UA0</b>	<b>FBM13M2UA0</b>	<b>FBM13M1UA0</b>
	Size (W x H x D) mm	600 x 341 x 50.8	600 x 251 x 50.8	600 x 251 x 50.8
	Quantity	EA	2	2
	Grade	-	*ePM <sub>1</sub> 65%	ePM <sub>1</sub> 65%
Filter (2)	Size (W x H x D) mm	-	-	250 x 251 x 50.8
	Quantity	EA	-	1
	Grade	-	-	ePM <sub>1</sub> 65%

\* Grade : ISO 16890

## LG Wi-Fi Modem

Control conditioners by using internet devices such as Android or iOS smartphones.




**PWFMD200**

### Features


- User can enjoy anytime, anywhere access with Wi-Fi equipped device through ThinQ mobile app.
- This allows the user to access the unit remotely to switch unit on or off before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (ThinQ) is available.
- Simple operation for various functions.
  - On / Off
  - Reservation (Sleep, Weekly On / Off)
  - Operation Mode
  - Energy Monitoring<sup>2)</sup>
  - Current / Set Temperature
  - Filter Management
  - Fan Speed
  - Error Check
  - Vane Control<sup>1)</sup>
  - Air Purify<sup>3)</sup>

Model Name	<b>PWFMD200</b>
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	System Air Conditioner <sup>3)</sup>
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

Note : 1. Functionality may be different according to each IDU model.  
 2. User interface of application shall be revised for its design and contents improvement.  
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.  
 1) Vane Control may not be possible according to the type of Indoor unit.  
 2) LG Centralized controller and PDI installation is required for this function.  
 3) For the compatibility with indoor units, regional LG office.

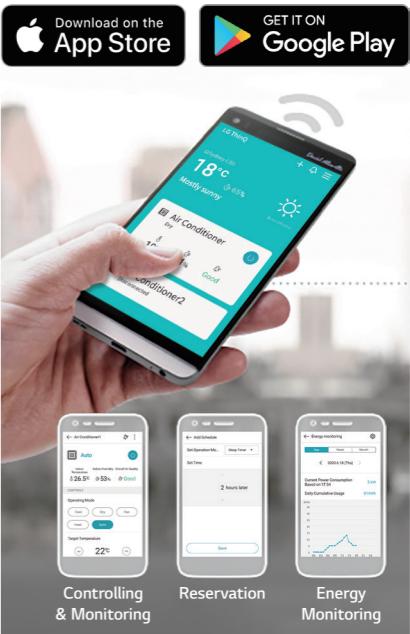

### Overview

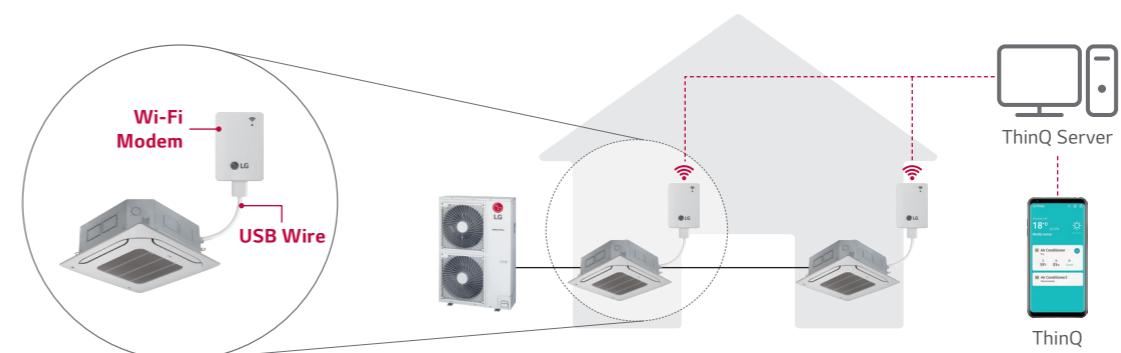

※ Search "ThinQ" on Google market or Appstore then download the app.

※ Internet service with Wi-Fi connection has to be available.

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

## Standard Wired Remote Controller



**Standard III**  
PREMTB100

**Standard III**  
PREMTBB10



**Standard II**  
PREMTB001

**Standard II**  
PREMTBB01

For more  
LG Air Conditioner  
information,  
please visit  
our YouTube  
channel through  
QR code.



Model Name	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On / Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling, Heating, Auto, Dehumidification, Fan	
Auto Swing / Vane Control	•	•
Reservation	Simple, Sleep, On / Off, Weekly, Holiday	
Time Display	•	•
Electrical Failure Compensation	•	•
Child Lock	•	•
Operation Status LED	•	•
Indoor Temperature Display	•	•
Wireless Remote Controller Receiver	-	•
Size (W x H x D, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	•	•

※ Refer to each model PDB for applicable models.

## Remote Controller

### PI 485



**PWLSSB21H**



**PMNFP14A1**

Power : Single phase AC 220V 50/60Hz  
Max. no. of the indoor units that can be connected : 64 UNITS  
Model applied : RAC / Multi / Single / Therma V

※ Refer to each product PDB for applicable models.

## Dry Contact



**PDRYCB000**



**PDRYCB400**



**PDRYCB320**



**PDRYCB500**

※ Refer to each product PDB for applicable models.


Model	PDRYCB000	PDRYCB400	PDRYCB320	PDRYCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12 V from indoor unit PDB
Voltage / Non Voltage Input	-	•	•	-
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	•
Fan Speed Setting	-	-	•	•
Thermo Off	-	•	•	-
Energy Saving	-	•	-	-
Temperature Setting	-	•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

## STANDARD INVERTER (R32)

MJ18PC NSJ / MJ24PC NSJ

(Unit : mm)

PART NAME	
1	Refrigerant / Drain Pipe and Cable Routing Hole
2	Installation Plate
3	Drain Hose Connection
4	Terminal Block for Power Supply Communication
5	Display & Remote Controller Signal Receiver
6	Decoration Cover

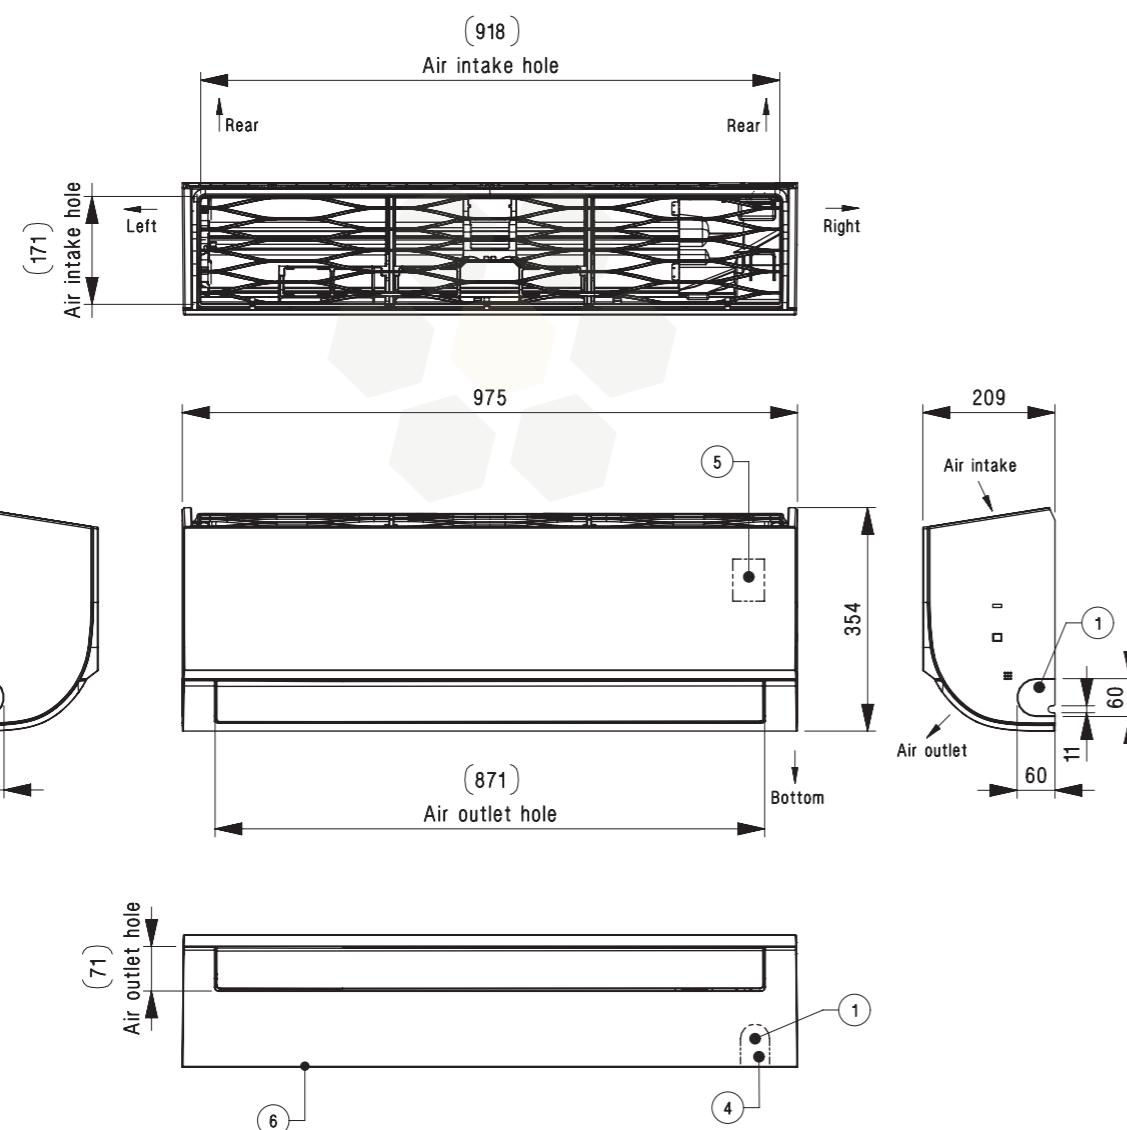


## STANDARD / COMPACT INVERTER (R32)

US30F NRO / US36F NRO

(Unit : mm)

PART NAME	
1	Refrigerant / Drain Pipe and Cable Routing Hole
2	Installation Plate
3	Drain Hose Connection
4	Terminal Block for Power Supply Communication
5	Display & Remote Controller Signal Receiver
6	Decoration Cover

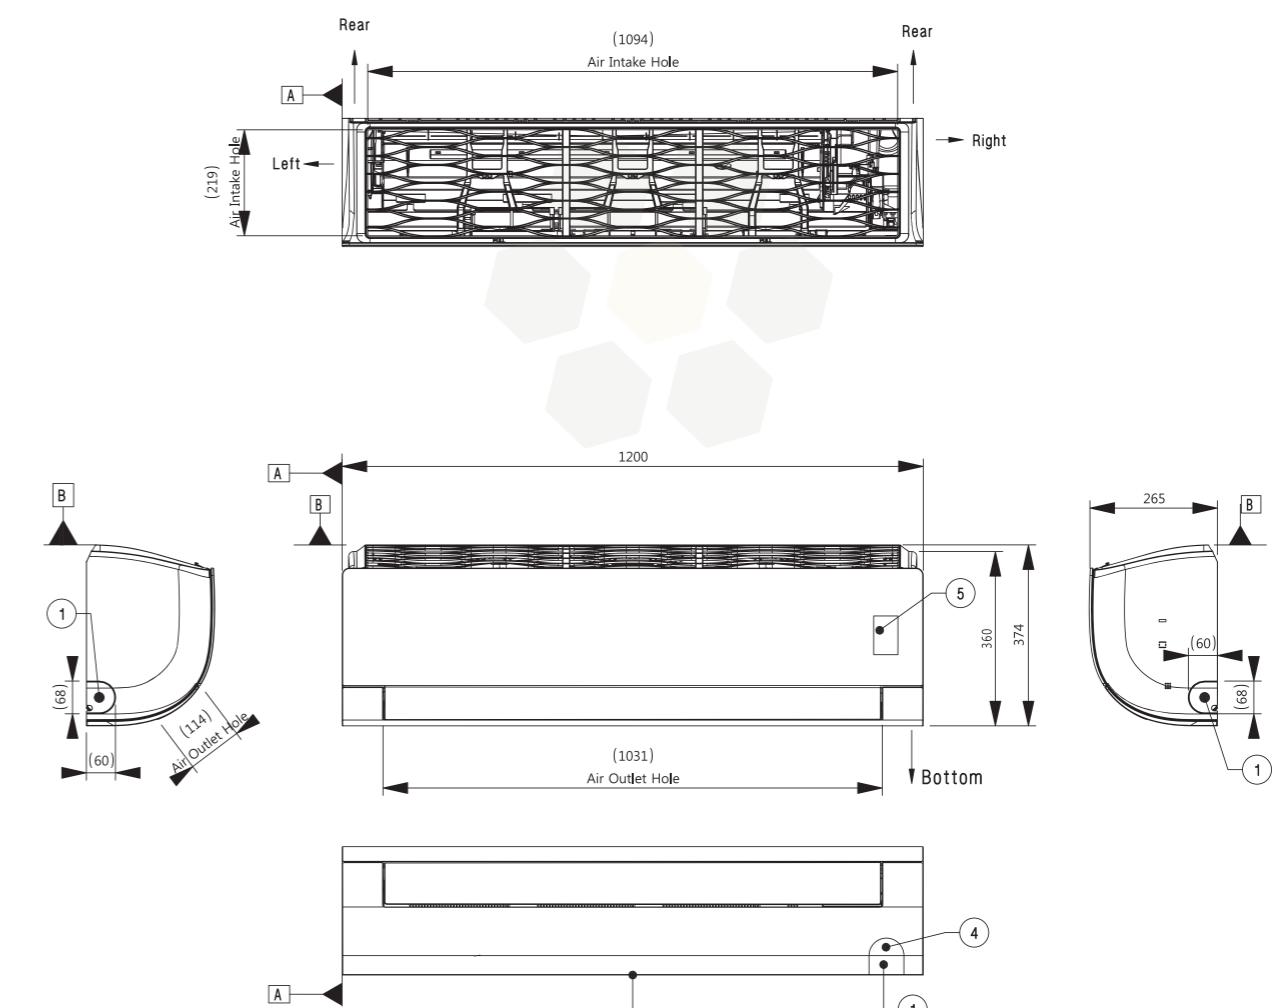


# FLOOR STANDING

## STANDARD INVERTER (R410A)

UP48 NT2

(Unit : mm)

PART NAME	
1	Front Air Discharge Grille
2	Display & Single Receiver
3	Air Suction Grille

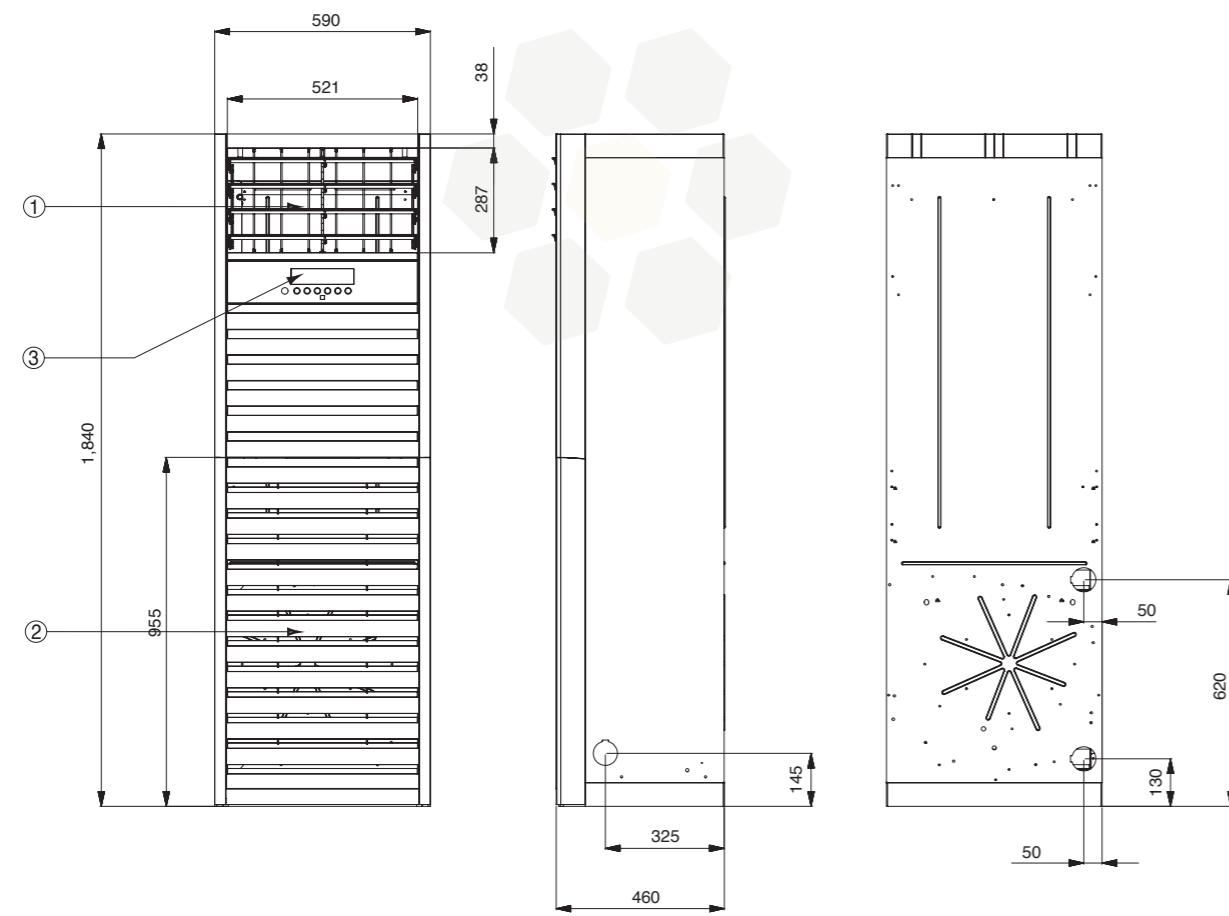


## HIGH / STANDARD / COMPACT INVERTER (R32)

UUA1 ULO

(Unit : mm)

PART NAME	
1	Air Outlet
2	Control Cover & SVC Valve Cover
3	Power and Communication Cable Connection
4	Gas Pipe Connection
5	Liquid Pipe Connection
6	Power and Communication Cable Routing hole
7	Refrigerant Pipe Routing Hole
8	Handle
9	Intake Air Temperature Sensor Cover

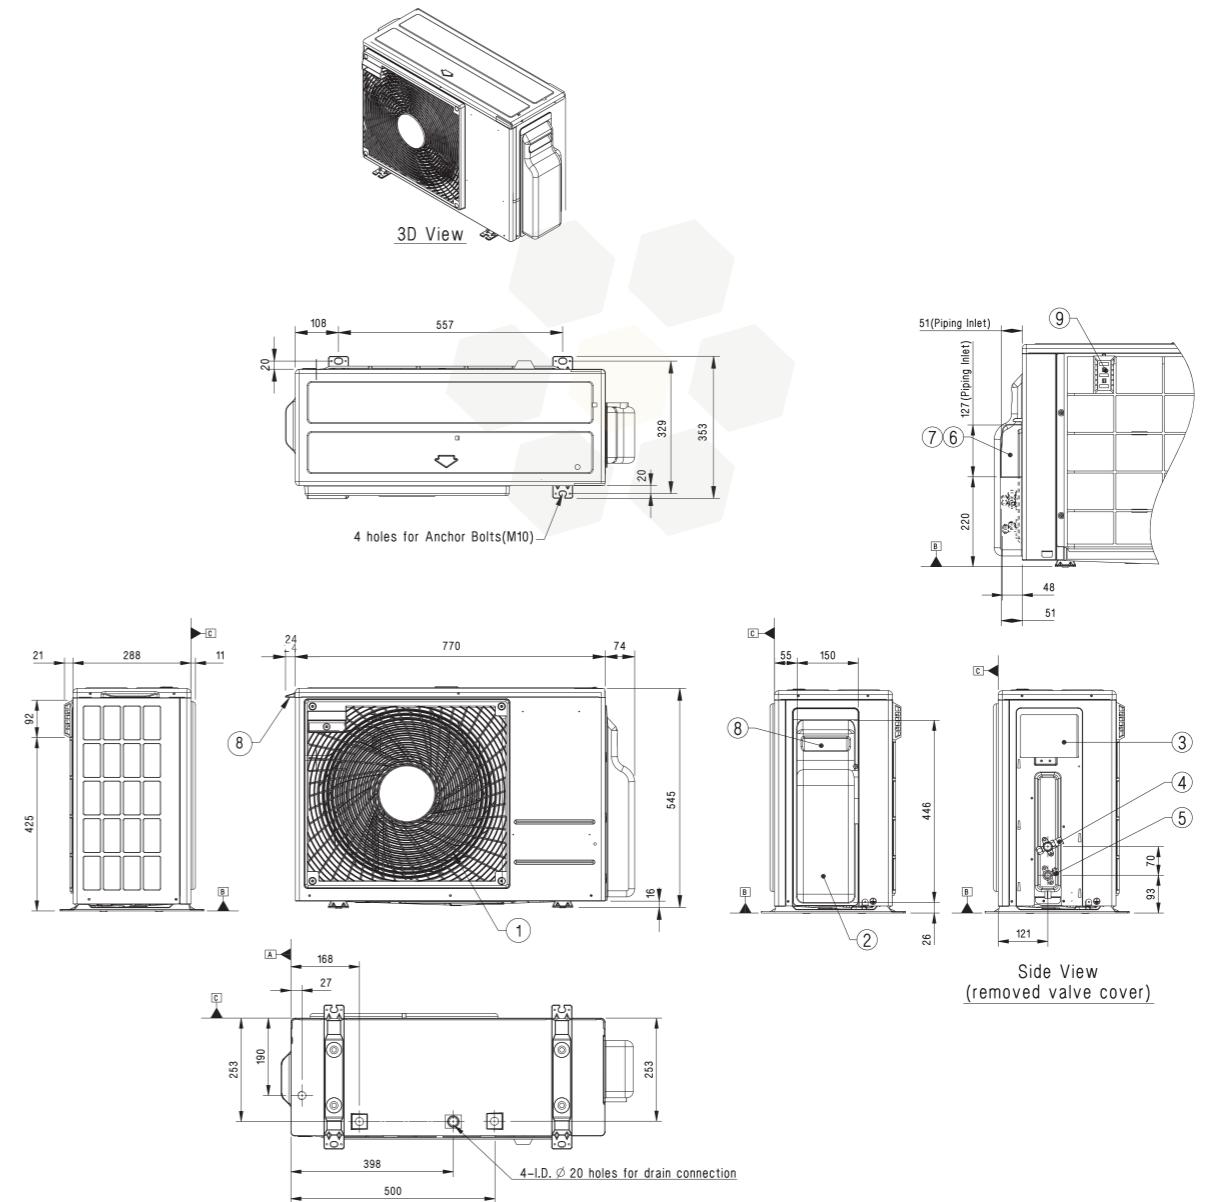


# UNIVERSAL OUTDOOR

## HIGH / STANDARD / COMPACT INVERTER (R32)


UUB1 U20

(Unit : mm)





	PART NAME
1	Air Outlet
2	Control Cover & SVC Valve Cover
3	Power and Communication Cable Connection
4	Gas Pipe Connection
5	Liquid Pipe Connection
6	Handle
7	Intake Air Temperature Sensor Cover




3D View

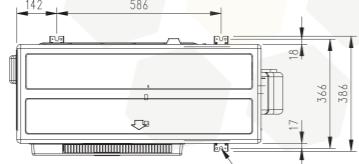

4 holes for Anchor Bolts(M10)

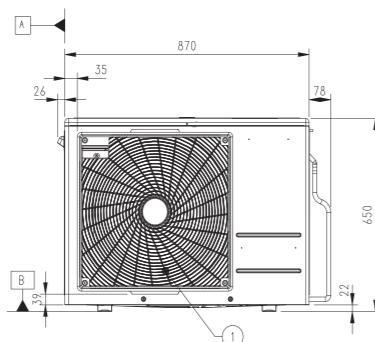

Side View  
(removed valve cover)

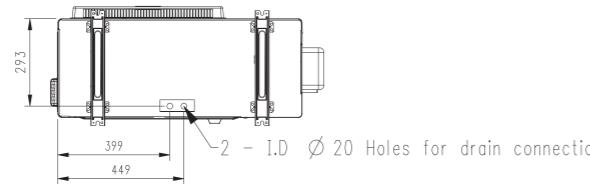


2 - I.D. Ø 20 Holes for drain connection

## HIGH / STANDARD / COMPACT INVERTER (R32)


UUC1 U40

(Unit : mm)





	PART NAME
1	Air Outlet
2	Power and Communication Cable Hole
3	Gas Pipe Connection
4	Liquid Pipe Connection
5	Handle
6	Pipe Routing Hole (Front)
7	Pipe Routing Hole (Side)
8	Pipe Routing Hole (Back)





3D View

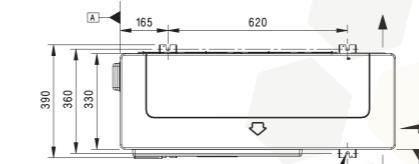

4 holes for Anchor Bolts (M10)

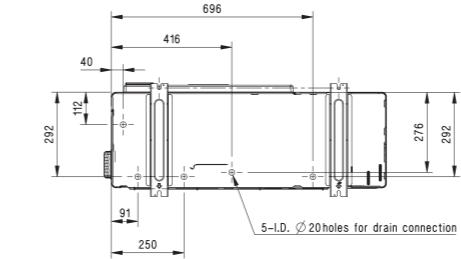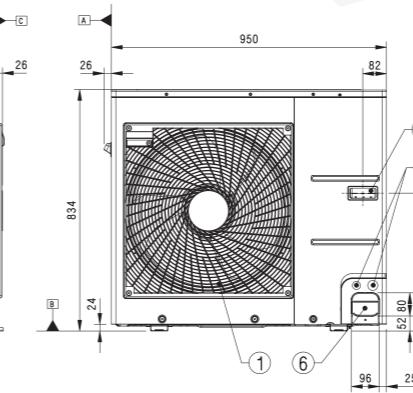

5-I.D. Ø 20 holes for drain connection

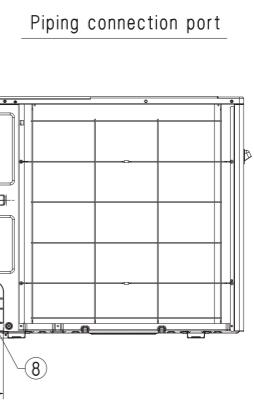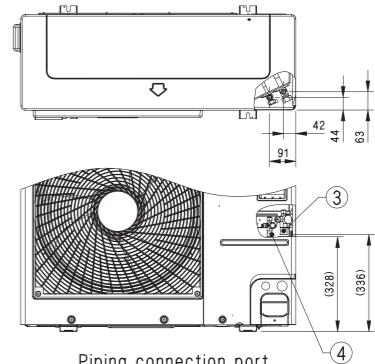

# UNIVERSAL OUTDOOR

COMMERCIAL

SINGLE SPLIT